

MB2S THRU MB10S

Single Phase 0.8 AMPS. Glass Passivated Bridge Rectifiers


Voltage Range 200 to 1000 Volts Current 0.8 Amperes

FEATURES

- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction technique results in inexpensive product
- ◆ High temperature soldering guaranteed:
260°C / 10 seconds / 0.375" (9.5mm)
lead length at 5 lbs., (2.3 kg) tension
- ◆ UL Recognized File number: E347214

MECHANICAL DATA

- ◆ Case: Molded plastic
- ◆ Lead: solder plated
- ◆ Polarity: As marked

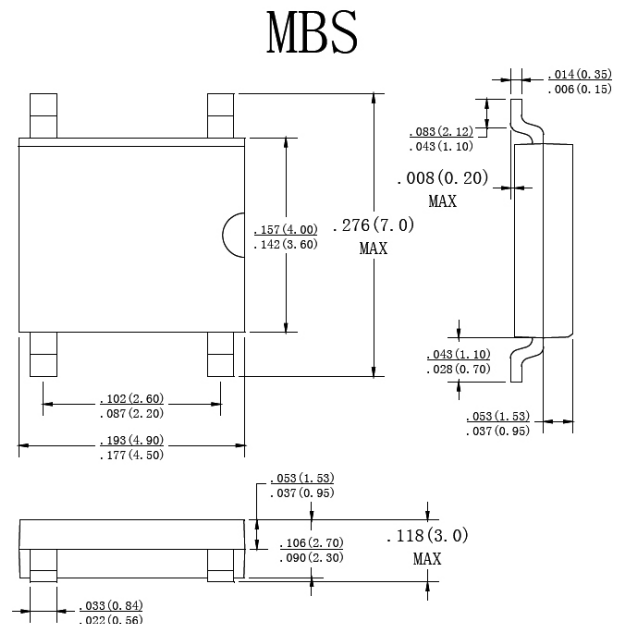

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

	SYMBOLS	MB2S	MB4S	MB6S	MB8S	MB10S	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	200	400	600	800	1000	V
Maximum Average Forward Rectified Current On glass-epoxy P.C.B. On aluminum substrate	I _(AV)			0.5 0.8			A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}			35			A
Maximum Instantaneous Forward Voltage at 0.4A	V _F			1.0			V
Maximum DC Reverse Current @ T _A =25°C Rated DC Blocking voltage per leg T _A =125°C	I _R			5.0 500			μA
Typical Thermal Resistance (Note1) (Note2)	R _{θJA} R _{θJL}			70 20			°C/W
Operating Temperature Range	T _J			-55 to +150			°C
Storage Temperature Range	T _{STG}			-55 to +150			°C

Note: 1. On aluminum substrate P.C.B. with an area of 0.8×0.8"(20×20mm) mounted on 0.05×0.05"(1.3×1.3mm) solder pad.

2. Thermal Resistance from Junction to Case with units Mounted on 2.6×1.4×0.06" Thick(6.5×3.5×0.15cm)Al. Plate.

MB2S THRU MB10S

RATING AND CHARACTERISTIC CURVES MB2S THRU MB10S

FIG.1-MAXIMUM NONO-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMNT

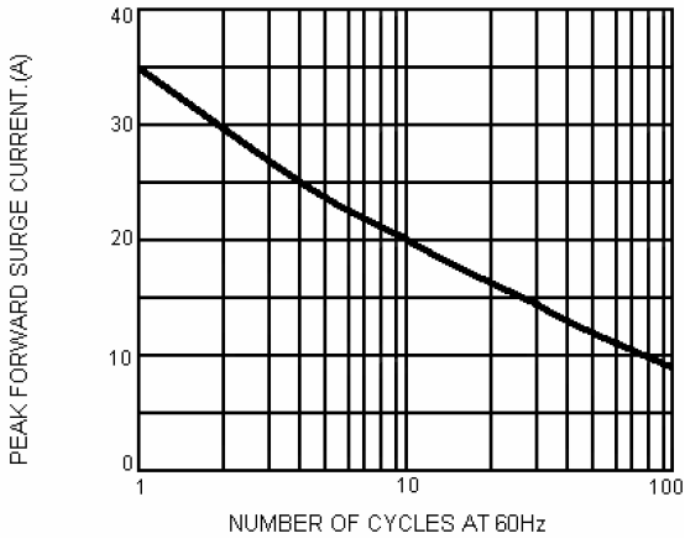


FIG.2-MAXIMUM FORWARD CURRENT DERATING CURVE

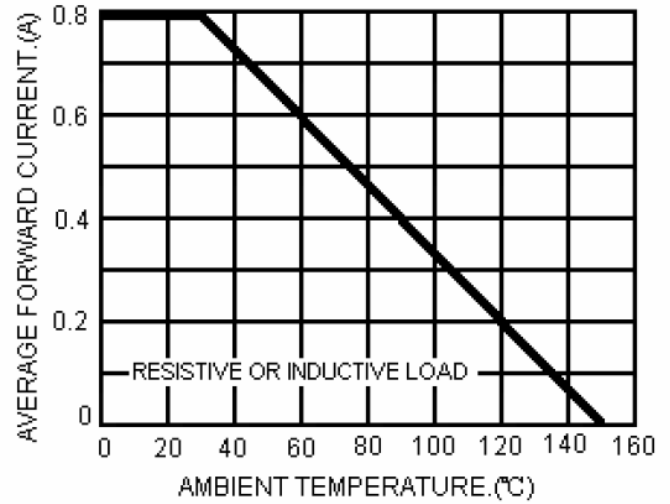


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT


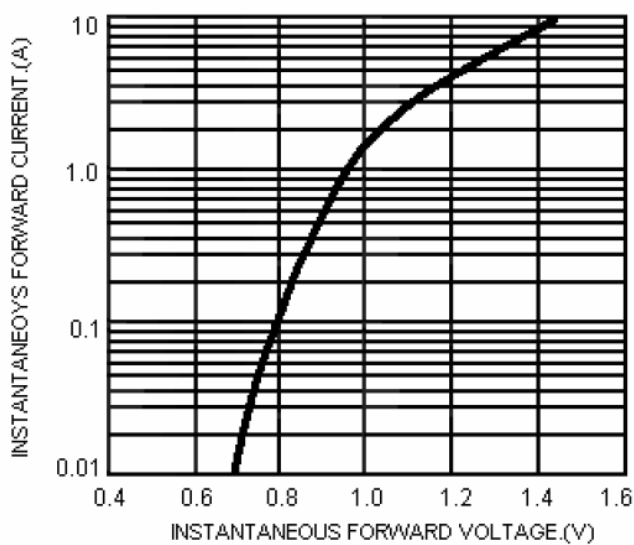


FIG.4-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

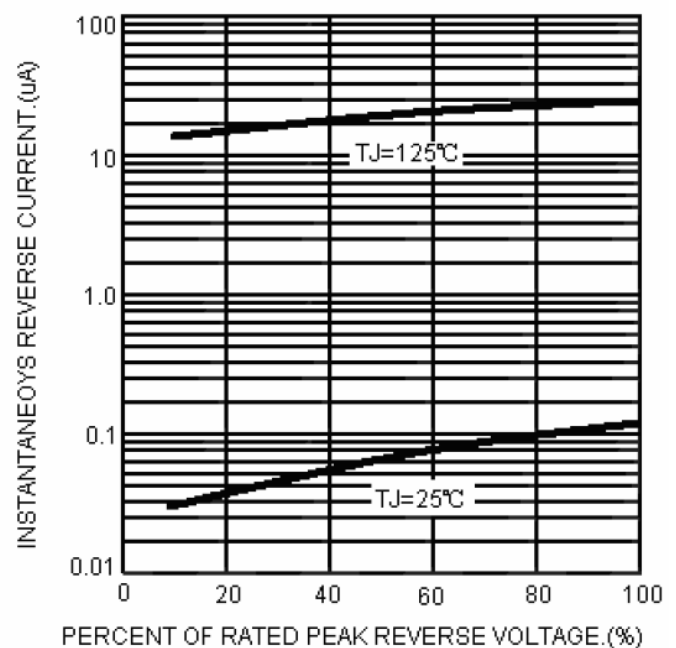

Note: Specifications are subject to change without notice.