


MATERIALS

BODY	PASSIVATED STAINLESS STEEL
CONTACT	GOLD PLATED
INSULATOR	PTFE
COUPLING NUT	BRASS NICKEL PLATED

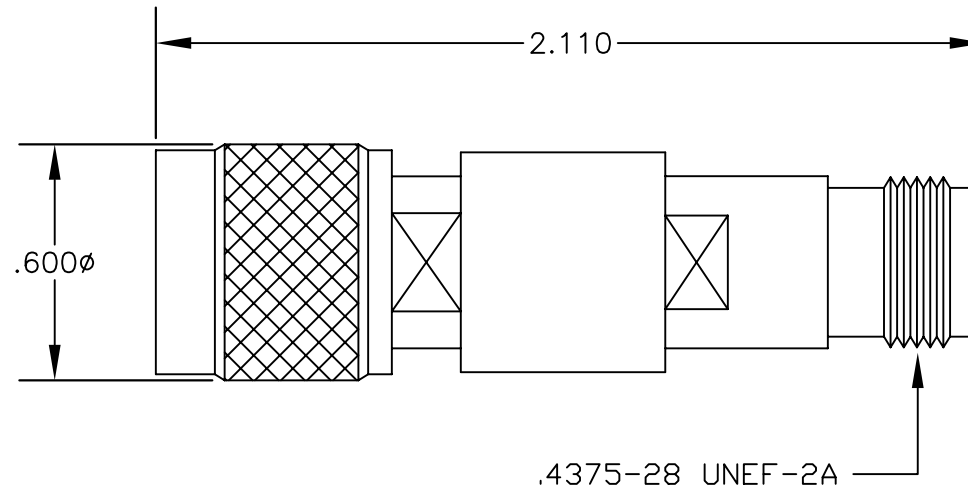

SPECIFICATIONS

FREQUENCY RANGE: 10 MHz TO 18 GHz
 TYPE OF D.C BLOCK: INNER
 INSERTION LOSS: .75 dB
 VSWR: 1.35:1 MAXIMUM
 WORKING VOLTAGE: 200 VOLTS



PASTERNACK ENTERPRISES, INC.
 P.O BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451
 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE		DES.			
PE8219		TNC MALE TO TNC FEMALE D.C. BLOCK (INNER) FREQUENCY RANGE: 10 MHz TO 18 GHz			
SIZE A	FSCM NO. 53919	CAD FILE	112103	SCALE	N/A
					127

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.