SPECIFICATIONS

MCA Connector

EH Series
Right Angle, Press-fit Type
1.27mm [.050"] Pitch
184 Pos.

Mechanical

Contact Normal Force: *75g min.*
Durability: *100 Cycles*
Contact Retention Force: *0.45kg min.*

Electrical

Current Rating: *1.0A, 30℃ Rise above Ambient*
Contact Resistance: *40mW max. initial, 50mW max. after Test*
Dielectric Withstand Voltage: *500V min. at Sea Level*
Pin to Pin Insulation Resistance: *800MW min.*

Physical

Housing: *Thermoplastic, UL 94V-0 rated in Black Color*
Contact: *Copper alloy*
Plating: See *"ORDERING INFORMATION"*
Storage Temperature Range: *-55℃ to +105℃*



DRAWING

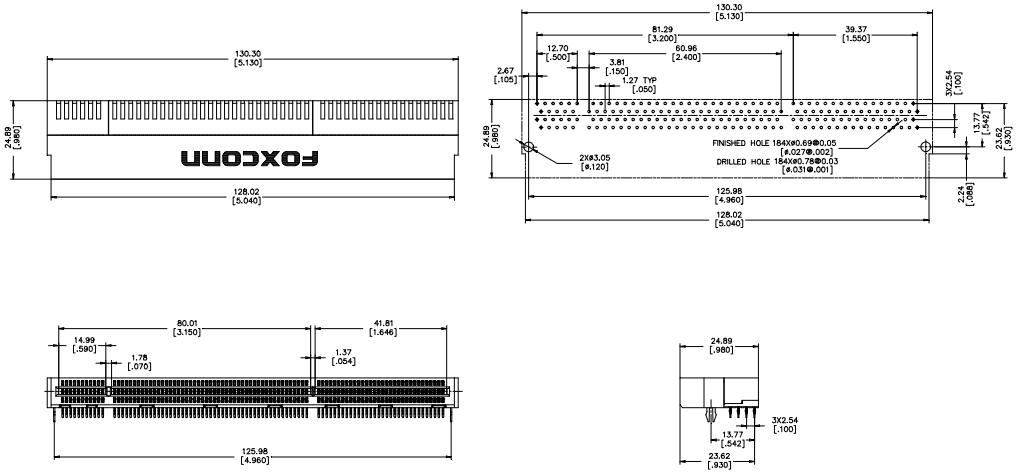

ORDERING INFORMATION

PRODUCT NO.: E H 9 9 2 * * - GJ - R

- Series prefix: Cardedge Conn.
- Tail Type: 9=Press-fit
- No. of pos.: 92=184 Pos.
- Tail Length: 0=3.18 [.125]
- Gold Plating: 1=Gold Flash, 6=10u" Gold, 7=15u" Gold
- Extension Code

All specification & dimensions are subject to change, please call your nearest Foxconn sales representative for update information.