
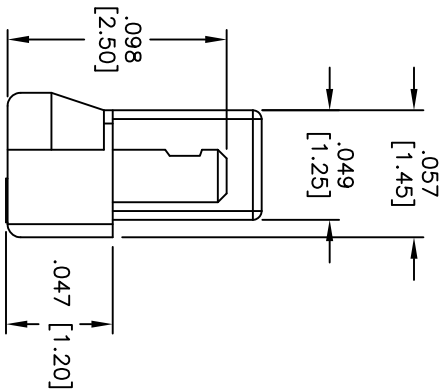
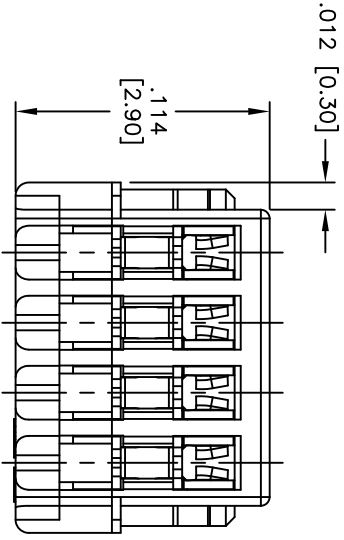


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/07	
A	11345	REDRAWN	5/09/11	
B	11345	Revised specs, material and operating temp	9/7/12	

APPROVED: _____
 DATE: _____ TITLE: _____

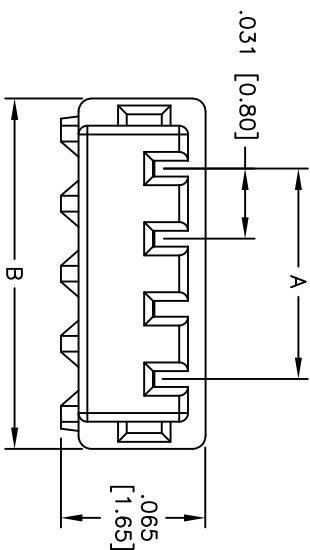

SPECIFICATIONS:

Material: Nylon 46, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Tin plated over Copper underplate overall
 Electrical:
 Operating voltage: 250V
 Current rating: 0.5A AC/DC (32 Awg wire)
 0.2A AC/DC (36 Awg wire)
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 200V AC for 1 minute
 Temperature Rating: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant

Positions: 02 thru 20
 A = .031 [0.80] x No. of Spaces
 B = .031 [0.80] x No. of Spaces + .063 [1.60]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE ±.10
 .XX ±.020 ØXX ±.015
 .XXX ±.015 ØXXX ±.010
 APPROVALS DATE

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: 0.8mm HOUSING IDC TYPE

DRAWN	BW	01/17/07
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	08CH-A-XX-IDC	B
REF: S0023T	SCALE: NTS	SHEET 1 OF 1



6 5 4 3 2 1