


Rectifier Diodes

1N4001A ~ 1N4007A

■ Features

- Low forward voltage drop
- High current capability
- Easy pick and place
- High surge current capability
- Plastic material used carries Underwriters

Laboratory Classification 94V-0

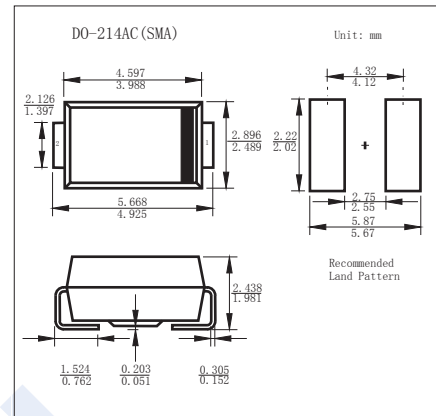

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	1N 4001A	1N 4002A	1N 4003A	1N 4004A	1N 4005A	1N 4006A	1N 4007A	Unit	
Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V	
RMS Voltage	V_{RMS}	35	70	140	280	420	560	700		
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000		
Forward Voltage @ 1A	V_F	1.1								A
Averaged Forward Current. $T_T=100^\circ\text{C}$	I_{FAV}	1								
Peak Forward Surge Current @ 8.3ms	I_{FSM}	40							30	
Maximum DC Reverse Current $T_a=25^\circ\text{C}$ $T_a=125^\circ\text{C}$	I_R	5								μA
Maximum Reverse Current *1	t_{rr}	1.5								
Typical Junction Capacitance *2	C_j	12								pF
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	75						85		$^\circ\text{C}/\text{W}$
Thermal Resistance Junction to Lead *3	$R_{\theta JL}$	27						30		
Junction Temperature	T_j	150								$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to 150								

* 1 Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$

* 2 Measured at 1 MHz and Applied $V_R=4.0\text{V}$

■ Marking

NO.	1N4001A	1N4002A	1N4003A	1N4004A	1N4005A	1N4006A	1N4007A
Marking	M1	M2	M3	M4	M5	M6	M7

Rectifier Diodes

1N4001A ~ 1N4007A

■ Typical Characteristics

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

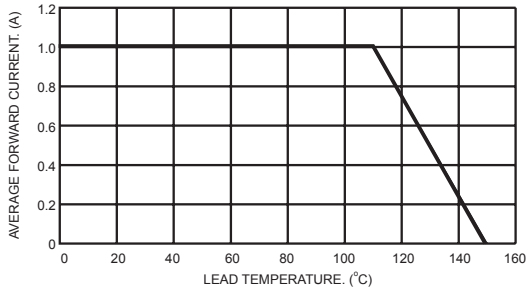


FIG.2- TYPICAL REVERSE CHARACTERISTICS

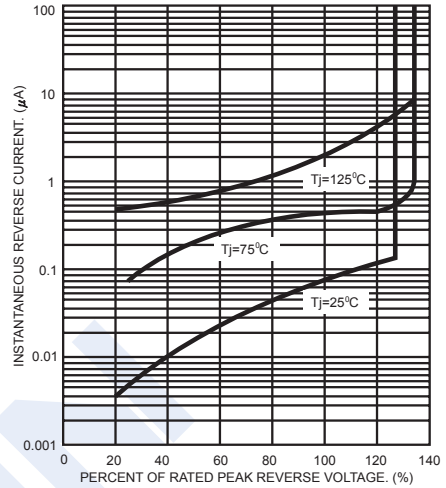


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

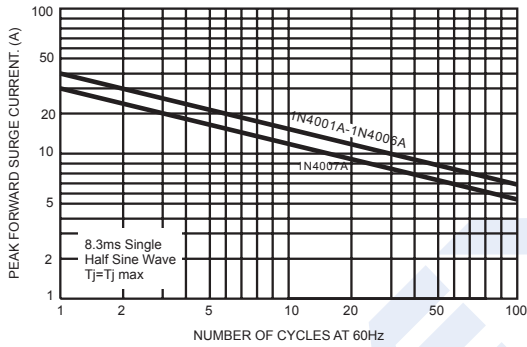


FIG.4- TYPICAL JUNCTION CAPACITANCE

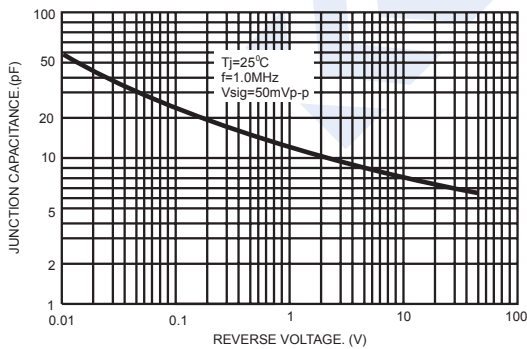


FIG.5- TYPICAL FORWARD CHARACTERISTICS



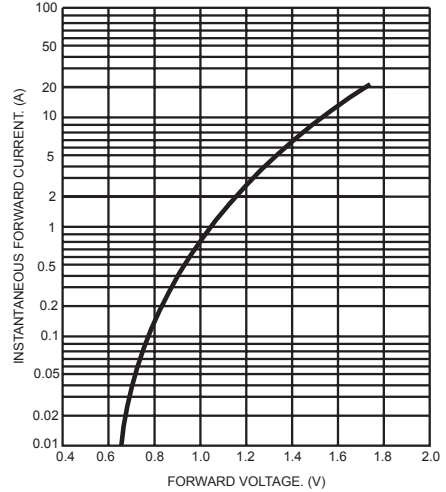


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

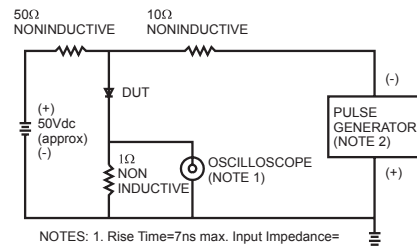

NOTES: 1. Rise Time=7ns max. Input Impedance= 1 megohm 22pf
2. Rise Time=10ns max. Source Impedance= 50 ohms