



SR820 THRU SR8200

SCHOTTKY BARRIER RECTIFIERS


FEATURES

- Guardring for overvoltage protection
- Very small conduction losses
- Extremely fast switching
- Low forward voltage drop
- High frequency operation
- Solder dip 260 °C, 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

MECHANICAL DATA

Case: JEDEC DO-201AD molded plastic body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 1.10 gramS

DO-201AD(DO-27)

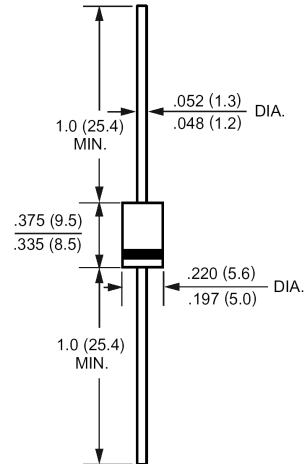

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

PARAMETER	SYMBOL	SR 820	SR 830	SR 840	SR 850	SR 860	SR 870	SR 880	SR 890	SR 8100	SR 8150	SR 8200	UNIT	
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	70	80	90	100	150	200	VOLTS	
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	49	56	63	70	105	140	VOLTS	
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	70	80	90	100	150	200	VOLTS	
Maximum average forward rectified current 0.375" (9.5mm) lead length	$I_{(AV)}$	8.0											Amp	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	150											Amps	
Maximum instantaneous forward voltage at 8.0A	V_F	0.55			0.70			0.85			0.95		Volts	
Maximum DC reverse current $T_A=25\text{ }^\circ\text{C}$		0.5											mA	
at rated DC blocking voltage $T_A=100\text{ }^\circ\text{C}$	I_R	20.0					10.0					2.0		
Typical junction capacitance (NOTE 1)	C_J	500.0					400.0							pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	25.0											$^\circ\text{C}/\text{W}$	
Operating junction temperature range	T_J	-65 to +125						-65 to +150						$^\circ\text{C}$
Storage temperature range	T_{STG}	-65 to +150											$^\circ\text{C}$	

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted





SR820 THRU SR8200

SCHOTTKY BARRIER RECTIFIERS

RATINGS AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

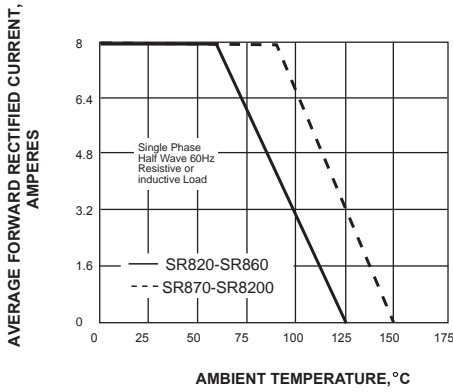


FIG.2-TYPICAL FORWARD CHARACTERISTICS

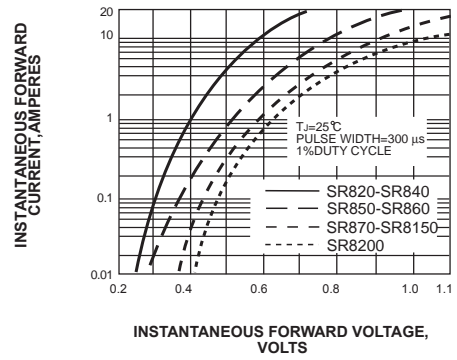


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

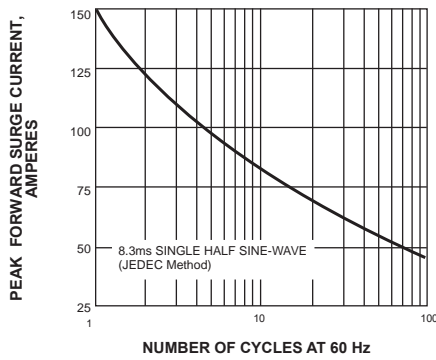


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

