


CHIP RESISTOR NETWORKS AND TRIMMABLE CHIP RESISTORS

CHIP RESISTOR NETWORKS:


FEATURES

CR networks have been designed to fit in where ever greater density is required. Available in banks of 2 or 4 resistors in one package. Suitable for flow and reflow soldering.

DIMENSIONS

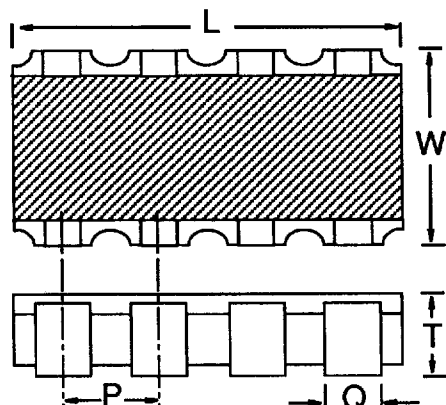


TYPE	L	W	T	P	Q
CRN16	$0.8 \times n$	1.6 ± 0.1	0.45 ± 0.1	0.8 ± 0.1	0.5 ± 0.1
CRN32	$1.27 \times n$	3.1 ± 0.2	0.55 ± 0.1	1.27 ± 0.2	0.8 ± 0.2



CHARACTERISTICS

Type	Rated Power at 70° C	Maximum Working Voltage	Maximum Overload Voltage	TCR	Resistance Range	Tolerance	Operating Temperature Range
CRN16	0.032W	25V	50V	$\pm 300 \text{ PPM}/^\circ\text{C}$	22Ω~1MΩ	J($\pm 5\%$)	-55°C ~ 125°C
CRN32	0.063W	75V	150V	$\pm 200 \text{ PPM}/^\circ\text{C}$			

HOW TO ORDER

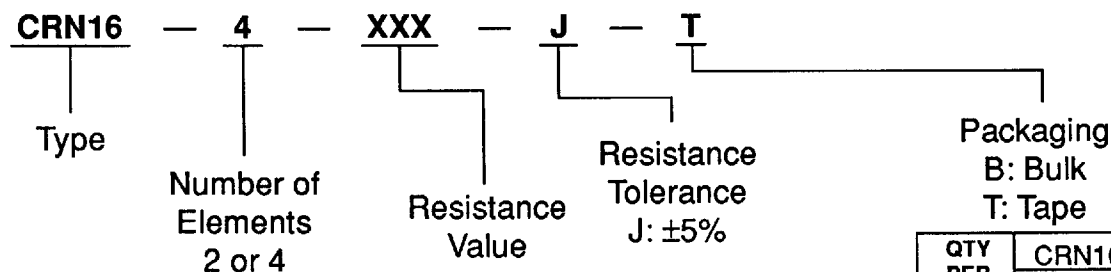

QTY PER REEL	CRN16	5000
	CRN32	4000

