1.5 AMP POSITIVE VOLTAGE REGULATOR

EZ1086BC, EZ1086C & EZ1086I

October 3, 2000

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

DESCRIPTION

The EZ1086 series of high performance positive voltage regulators are designed for use in applications requiring low dropout performance at full rated current. Additionally, the EZ1086 series provides excellent regulation over variations in line, load and temperature.

Outstanding features include low dropout performance at rated current, fast transient response, internal current limiting and thermal shutdown protection of the output device.

A variety of options are available for maximum flexibility: the EZ1086C has both fixed and adjustable voltage options and is designed for use in commercial applications; the EZ1086BC is adjustable only for cost sensitive commercial applications; the EZ1086I is adjustable only for industrial applications. All devices are available in the popular TO-220 and TO-263 packages.

APPLICATIONS

- Post regulators
- Battery chargers

FEATURES

- Low dropout voltage: 1.3V max. for EZ1086C,
 1.4V max. for EZ1086I, 1.45V max. for EZ1086BC
- Full current rating over line and temperature
- Fast transient response
- ±2% total output regulation over line, load and temperature (±2.4% for EZ1086BC)
- Adjust pin current max 90µA over temperature
- Fixed/adjustable output voltage (EZ1086C)
- Line regulation typically 0.015%
- Load regulation typically 0.05%
- Industrial temperature range (EZ1086I)
- TO-220 and TO-263 packages


ORDERING INFORMATION

DEVICE ⁽¹⁾⁽²⁾	PACKAGE
EZ1086BCM.TR EZ1086CM-X.X.TR EZ1086IM.TR	TO-263 ⁽³⁾
EZ1086BCT EZ1086CT-X.X EZ1086IT	TO-220 ⁽⁴⁾

Notes:

- (1) Where X.X denotes voltage options (EZ1086C only). Available voltages are: 2.5V, 3.3V and 3.45V. Leave blank for adjustable version (1.3 to 5.7V). Contact factory for additional voltage options.
- (2) Where C and I denote Commercial (0°C to 70°C) and Industrial (-40°C to 85°C) ambient temperature ranges.
- (3) Only available in tape and reel packaging. A reel contains 800 devices.
- (4) Only available in tube packaging. A tube contains 50 devices.

TYPICAL APPLICATIONS

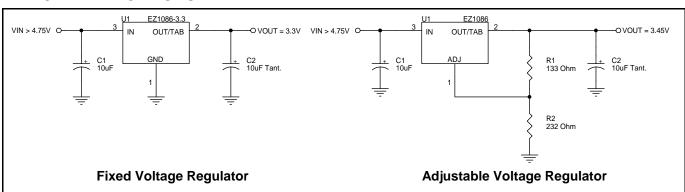

Notes:

- (1) C1 required if device is far from filter capacitors
- (2) C2 required for stability



October 3, 2000

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Maximum	Units
Input Supply Voltage	V _{IN}	7	V
Power Dissipation	P _D	Internally Limited	W
Thermal Resistance Junction to Case TO-220 TO-263	$\theta_{\sf JC}$	3 3	°C/W
Thermal Resistance Junction to Ambient TO-220 TO-263	θ_{JA}	50 60	°C/W
Operating Ambient Temperature Range EZ1086BC, EZ1086C EZ1086I	T _A	0 to 70 -40 to 85	°C
Operating Junction Temperature Range EZ1086BC, EZ1086C EZ1086I	Т	0 to 125 -40 to 125	°C
Storage Temperature Range	T _{STG}	-65 to 150	°C
Lead Temperature (Soldering) 10 Sec	T _{LEAD}	300	°C
ESD Rating (Human body model)	ESD	2	kV

ELECTRICAL CHARACTERISTICS

Unless otherwise specified: Adj V_{IN} = 2.75V to 7.0V and Adj I_{O} = 10mA to 1.5A; Fixed V_{IN} = 4.75 to 7.0V and Fixed I_{O} = 0 mA to 1.5A. Values in **bold** apply over full operating ambient temperature range.

Parameter	Symbol	V _{IN}	Io	Min	Тур	Max	Units
Output Voltage ⁽¹⁾	Vo	5V	0mA	0.99IV _O I	Vo	1.01IV _o I	V
EZ1086C-X.X				0.98IV _o I		1.02IV _o I	
Reference Voltage (1)	V_{REF}	5V	10mA	1.238	1.250	1.262	V
EZ1086C, EZ1086I				1.225		1.275	
Reference Voltage (1)	V _{REF}	5V	10mA	1.233	1.250	1.267	V
EZ1086BC				1.220		1.280	
Line Regulation ⁽¹⁾	REG _(LINE)		10mA		0.045	0.2	%
Load Regulation ⁽¹⁾	REG _(LOAD)	5V			0.15	0.4	%
Dropout Voltage EZ1086C, EZ1086C-X.X ⁽²⁾	V _D		1.5A		1.20	1.30	V
EZ1086BC ⁽²⁾					1.20	1.45	
EZ1086I ⁽²⁾					1.20	1.40	
Current Limit	I _{CL}			1.5	2.0		Α
Quiescent Current Fixed Voltage Version	IQ	5V			10	14	mA
Temperature Coefficient	T _c				0.005		%/°C

1.5 AMP POSITIVE VOLTAGE REGULATOR

October 3, 2000

ELECTRICAL CHARACTERISTICS (Cont.)

Unless otherwise specified: Adj $V_{IN} = 2.75V$ to 7.0V and Adj $I_O = 10$ mA to 1.5A; Fixed $V_{IN} = 4.75$ to 7.0V and Fixed $I_O = 0$ mA to 1.5A. Values in **bold** apply over full operating ambient temperature range.

Parameter	Symbol	V _{IN}	Io	Min	Тур	Max	Units
Adjust Pin Current	I _{ADJ}				55	90	μA
Adjust Pin Current Change	ΔI_{ADJ}				0.2	5	μA
Temperature Stability	T _s	5V	0.5A		0.5		%
Minimum Load Current Adj. Voltage Versions	Io	5V			5	10	mA
RMS Output Noise ⁽³⁾	V _N				0.003		%V _o
Ripple Rejection Ratio ⁽⁴⁾	R _A	5V	1.5A	60	72		dB


NOTES:

- (1) Low duty cycle pulse testing with Kelvin connections required.
- (2) ΔV_{OUT} , $\Delta V_{REF} = 1\%$
- (3) Bandwidth of 10 Hz to 10 kHz.
- (4) 120 Hz input ripple (C_{ADJ} for ADJ = 25μ F).
- (5) Over Temp. (O.T.) = over specified operating junction temperature range.




October 3, 2000

BLOCK DIAGRAM



PIN CONFIGURATIONS

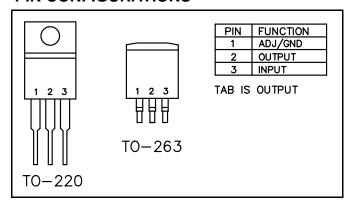


PIN DESCRIPTIONS

Pin	Pin Name	Pin Function
1	ADJUST /	This pin is the negative side of the reference voltage for adjustable devices. Transient response can be improved by adding a small bypass capacitor from the adjust pin to ground.
	GROUND	This pin is the bottom end of the internal resistor feedback chain for fixed output voltage parts, and should be connected to ground.
2	OUTPUT	This is the power output of the device, and is electrically connected to the TAB.
3	INPUT	This is the input supply pin for both the control circuitry and the pass device.




October 3, 2000

DEVICE OUTLINE - TO-220

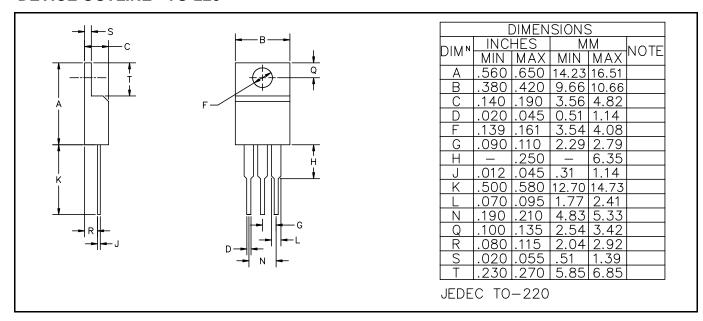

DEVICE OUTLINE - TO-263

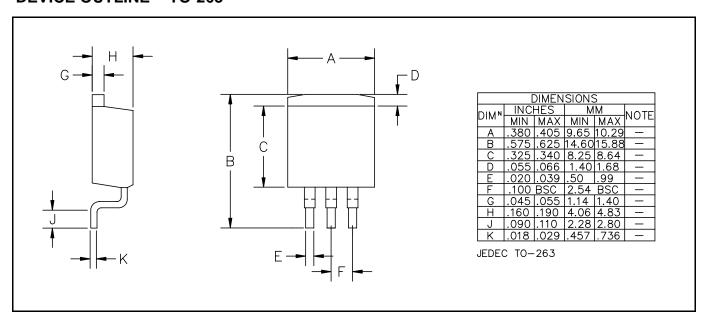

ECN00-1352