

March 2004 Revised March 2004

# FSA1256 • FSA1257 • FSA1258 Low R<sub>ON</sub> Low Voltage Dual SPST Analog Switch

## **General Description**

The FSA1256, FSA1257, and FSA1258 are high performance dual Single Pole/Single Throw (SPST) analog switches. These devices feature ultra low  $R_{ON}$  of  $1.1\Omega$  maximum at 4.5V  $V_{CC}$  and will operate over the wide  $V_{CC}$  range of 1.65V to 5.5V. These devices are fabricated with sub-micron CMOS technology to achieve fast switching speeds and are designed for break-before-make operation. The select input is TTL level compatible.

## **Features**


- $\blacksquare$  Maximum 1.1 $\Omega$  ON Resistance (R<sub>ON</sub>) for 4.5V supply
- $0.4\Omega$  max R<sub>ON</sub> flatness for 4.5V supply
- Space saving MicroPak<sup>™</sup> packaging
- Broad V<sub>CC</sub> operating range: 1.65V to 5.5V
- Fast turn-on and turn-off time
- FSA1258 features break-before-make enable circuitry
- Over-voltage tolerant TTL compatible control input

## **Ordering Code:**

Order Number	Package Number	Product Code Top Mark	Package Description	Supplied As	
FSA1256L8X	MAC08A	EB	8-Lead MicroPak, 1.6 mm Wide	5K Units on Tape and Reel	
FSA1257L8X (Preliminary)	MAC08A	EC	8-Lead MicroPak, 1.6 mm Wide	5K Units on Tape and Reel	
FSA1258L8X (Preliminary)	MAC08A	ED	8-Lead MicroPak, 1.6 mm Wide	5K Units on Tape and Reel	

## **Analog Symbols**





(Top Through View)

# 1S 1 8 7 1A 2B 2 6 1B 2A 3 4 5 2S

FSA1257

(Top Through View)

## **Truth Tables**

FSA1256

Control Input(s)	Function
L	Disconnect
Н	A Connected to B
Н	A Connected to B

H = HIGH Logic Level L = LOW Logic Level


MicroPak™ is a trademark of Fairchild Semiconductor Corporation.

### FSA1257

Control Input(s)	Function
L	A Connected to B
Н	Disconnect

# **Analog Symbol**

## FSA1258



(Top Through View)

## **Truth Table**

FSA1258

Control Input 1S Fu		Function	Control Input 2S	Function
	L	1A Connected to 1B	L	Disconnect
	Н	Disconnect	Н	2A Connected to 2B

H = HIGH Logic Level L = LOW Logic Level

# **Pin Descriptions**

Pin Names	Function
A, B	Data Ports
S	Control Input

## **Absolute Maximum Ratings**(Note 1)

#### 

Peak Switch Current (Pulsed at

1 ms duration, <10% Duty Cycle)

Power Dissipation @ 85°C

 $\label{eq:microPak} \begin{tabular}{lll} MicroPak 8L package & 180 mW \\ Storage Temperature Range (T_{STG}) & -65^{\circ}C to +150^{\circ}C \\ Maximum Junction Temperature (T_J) & +150^{\circ}C \\ \end{tabular}$ 

Lead Temperature (T<sub>L</sub>)

Soldering, 10 seconds +260°C

**ESD** 

Human Body Model 5.5kV

# Recommended Operating Conditions

Thermal Resistance  $(\theta_{JA})$  in still air

MicroPak 8L package 224°C/W (modeled)

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

**Note 2:** The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.

Note 3: Unused inputs must be held HIGH or LOW. They may not float.

## DC Electrical Characteristics (All typical values are @ 25°C unless otherwise specified)

400 mA

Symbol	Parameter	$V_{CC}$ $T_A = +25^{\circ}C$		T <sub>A</sub> = -40°C to +85°C		Units	Conditions			
Cynnbor	i diametei	(V)	Min	Тур	Max	Min	Max	Oilles	Conditions	
V <sub>IH</sub>	Input Voltage High	2.7 to 3.6				2.0		V		
		4.5 to 5.5				2.4		v		
$V_{IL}$	Input Voltage Low	2.7 to 3.6					0.6	V		
		4.5 to 5.5					0.8	v		
I <sub>IN</sub>	Control Input Leakage	2.7 to 3.6				-1.0	1.0	μА	V = 0V to V	
		4.5 to 5.5				-1.0	1.0	μА	$V_{IN} = 0V$ to $V_{CC}$	
I <sub>NO(OFF)</sub> ,	OFF-Leakage Current	5.5	-2.0		2.0	-20.0	20.0	nA	A = 1V, 4.5V	
I <sub>NC(OFF)</sub>		5.5	-2.0		2.0	-20.0	20.0	IIA	1B or 2B = 1V, 4.5V	
R <sub>ON</sub>	Switch ON Resistance	2.7		2.6	4.0		4.3	Ω	I <sub>OUT</sub> = 100 mA, 1B or 2B = 1.5V	
	(Note 4)	4.5		0.95	1.18		1.3	52	I <sub>OUT</sub> = 100 mA, 1B or 2B = 3.5V	
$\Delta R_{ON}$	ON Resistance Matching									
	Between Channels	4.5		0.06	0.12		0.15	Ω	$I_{OUT} = 100 \text{ mA}, 1B \text{ or } 2B = 3.5V$	
	(Note 5)									
R <sub>FLAT(ON)</sub>	ON Resistance Flatness	2.7		1.4				_	$I_{OUT} = 100 \text{ mA}, 1B \text{ or } 2B = 0V, 0.75V, 1.5V$	
	(Note 6)	4.5		0.2	0.3		0.4	Ω	I <sub>OUT</sub> = 100 mA, 1B or 2B = 0V, 1V, 2V	
I <sub>CC</sub>	Quiescent Supply Current	3.6					10.0		V = 0V or V   1 = 0V	
		5.5					10.0	μΑ	$V_{IN} = 0V \text{ or } V_{CC}, I_{OUT} = 0V$	

Note 4: ON Resistance is determined by the voltage drop between A and B pins at the indicated current through the switch.

Note 5:  $\Delta R_{ON} = R_{ONmax} - R_{ONmin}$  measured at identical  $V_{CC}$ , temperature, and voltage.

Note 6: Flatness is defined as the difference between the maximum and minimum value of ON Resistance over the specified range of conditions.

www.fairchildsemi.com


# AC Electrical Characteristics (All typical value are @ 25°C unless otherwise specified)


Symbol	Parameter	V <sub>CC</sub>	T <sub>A</sub> = +25°C		°C	T <sub>A</sub> = -40°C to +85°C		Units	Conditions	Figure	
	1 drameter	(V)	Min	Тур	Max	Min	Max	0	Conditions	Number	
t <sub>ON</sub>	Turn ON Time	2.7 to 3.6		15.0	50.0		60.0	ns	1B or 2B = 1.5V, $R_L = 50\Omega$ , $C_L = 35 \text{ pF}$	Figure 1	
		4.5 to 5.5		10.0	35.0		40.0	115	1B or 2B = 3.0V, $R_L = 50\Omega$ , $C_L = 35 \text{ pF}$	rigule i	
t <sub>OFF</sub>	Turn OFF Time	2.7 to 3.6		4.0	20.0		30.0	ns	1B or 2B = 1.5V, $R_L = 50\Omega$ , $C_L = 35 \text{ pF}$	Figure 1	
		4.5 to 5.5		8.0	15.0		20.0	115	1B or 2B = 3.0V, $R_L = 50\Omega$ , $C_L = 35 \text{ pF}$	rigule i	
t <sub>B-M</sub>	Break-Before-Make	2.7 to 3.6		12.0				ns	1B or 2B = 1.5V, $R_L = 50\Omega$ , $C_L = 35 \text{ pF}$	Figure 2	
	Time	4.5 to 5.5		7.0				115	1B or 2B = 3.0V, $R_L = 50\Omega$ , $C_L = 35 \text{ pF}$	i iguite 2	
Q	Charge Injection	2.7 to 3.6		10.0				рС	$C_L = 1.0 \text{ nF, } V_{GEN} = 0V,$	Figure 4	
		4.5 to 5.5		20.0				ρС	$R_{GEN} = 0\Omega$		
OIRR	OFF-Isolation	2.7 to 3.6		-70.0				dB	$f = 1MHz, R_1 = 50\Omega$	Figure 3	
		4.5 to 5.5		-70.0				ub	1 - 1101112, 11[ - 3052	r igule 3	
Xtalk	Crosstalk	2.7 to 3.6		-100				dB	$f = 1MHz, R_1 = 50\Omega$	Figure 6	
		4.5 to 5.5		-100				uБ	=	rigule 6	
BW	-3db Bandwidth	2.7 to 3.6		300				MHz	$R_1 = 50\Omega$	Figure 7	
		4.5 to 5.5		300				IVITIZ	KL = 5022	Figure 7	
THD	Total Harmonic	2.7 to 3.6		0.002				%	$R_L = 600\Omega$ , $V_{IN} = 0.5V$ P.P,	Figure 8	
	Distortion	4.5 to 5.5		0.002				/0	f = 20Hz to 20kHz	i igule o	

# Capacitance

Symbol	Parameter	V <sub>CC</sub>	$T_A = +25^{\circ}C$			$T_A = 40^{\circ}C \text{ to } +85^{\circ}C$		Units	Conditions	
Cymbol		(V)	Min	Тур	Max	Min	Max			
C <sub>IN</sub>	Control Pin Input Capacitance	0.0		3.0				pF	f = 1MHz (see Figure 6)	
C <sub>OFF</sub>	B Port OFF Capacitance			11.5				pF	f = 1MHz (see Figure 6)	
C <sub>ON</sub>	A Port ON Capacitance	4.5		43.0				pF	f = 1MHz (see Figure 6)	

# **AC Loading and Waveforms**




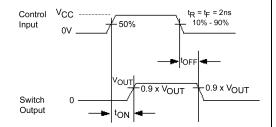

**C**<sub>L</sub> includes Fixture and Stray Capacitance

Logic Input Waveforms Inverted for Switches that have the Opposite Logic Sense

FIGURE 1. Turn-On/Turn-Off Timing

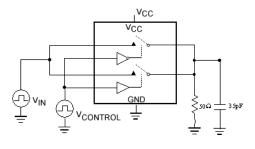




FIGURE 2. Break-Before-Make Timing

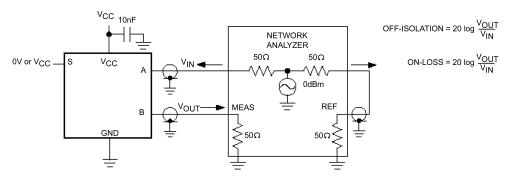


FIGURE 3. OFF Isolation

# AC Loading and Waveforms (Continued)

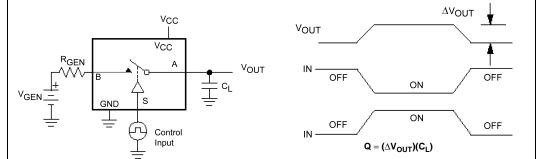


FIGURE 4. Charge Injection

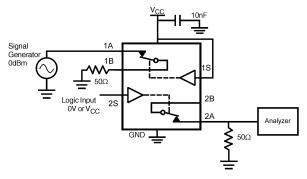


FIGURE 5. Crosstalk




FIGURE 6. ON/OFF Capacitance Measurement Setup

# AC Loading and Waveforms (Continued)

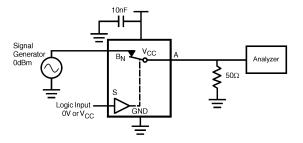


FIGURE 7. Bandwidth


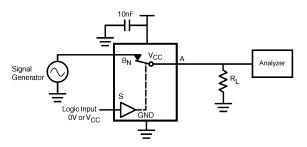


FIGURE 8. Harmonic Distortion

# **Tape and Reel Specification**

Tape Format For Micropak 8

. up 0 . 0u 0	o. opan o				
Package	Таре	Number	Cavity	Cover Tape	
Designator	Section	Cavities	Status	Status	
	Leader (Start End)	125 (typ)	Empty	Sealed	
L8X	Carrier	5000	Filled	Sealed	
	Trailer (Hub End)	75 (typ)	Empty	Sealed	

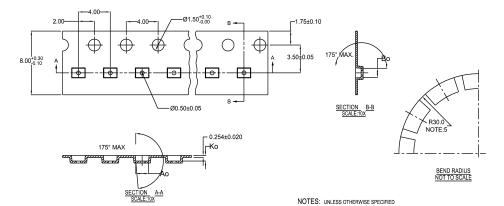


10	300056	2.30±0.05	1.78±0.05	0.68±0.05
8	300038	1.78±0.05	1.78±0.05	0.68±0.05
6	300033	1.60±0.05	1.15±0.05	0.70±0.05
LEAD TYPE	STOCK#	Ao	Во	Ko

- 1. ACCUMULATED 50 SPROCKETS, SPROCKET HOLE PITCH IS 200.00 ±0.30MM
- 2. NO INDICATED CORNER RADIUS IS 0.127MM
- 3. CAMBER NOT TO EXCEED 1MM IN 100MM
- 4. SMALLEST ALLOWABLE BENDING RADIUS
- 5. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE




SCALE: 6X

## **REEL DIMENSIONS** inches (millimeters)

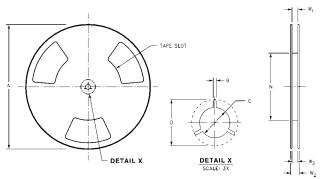

Tape	Α	В	С	D	N	W1	W2	W3
Size								
0	7.0	0.059	0.512	0.795	2.165	0.331 + 0.059/-0.000	0.567	W1 + 0.078/-0.039
8 mm	(177.8)	(1.50)	(13.00)	(20.20)	(55.00)	(8.40 + 1.50/-0.00)	(14.40)	(W1 + 2.00/-1.00)

## Physical Dimensions inches (millimeters) unless otherwise noted

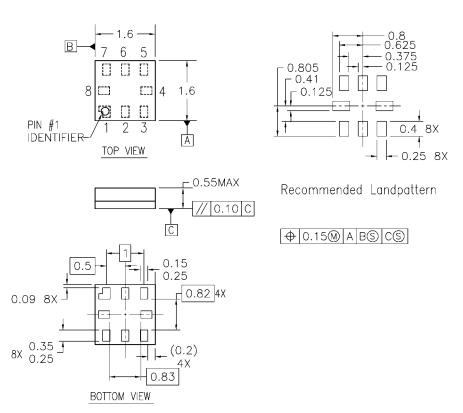

## Notes:

- 1. PACKAGE REGISTRATION WITH JEDEC IS ANTICIPATED
- 2. DIMENSIONS ARE IN MILLIMETERS
- 3. DRAWING CONFORMS TO ASME Y.14M-1994

MAC08AREVB

#### 8-Lead MicroPak, 1.6 mm Wide Package Number MAC08A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com