



# BSS84W


## P-CHANNEL ENHANCEMENT MODE FIELD EFFECT TRANSISTOR

## **Features**

- Low On-Resistance
- Low Gate Threshold Voltage
- Low Input Capacitance
- Fast Switching Speed
- Lead Free/RoHS Compliant (Note 2)
- "Green" Device (Note 3 and 4)

### **Mechanical Data**

- Case: SOT-323
- Case Material: Molded Plastic, "Green" Molding Compound, Note 4. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminal Connections: See Diagram
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Marking Code (See Page 2): K84
- Ordering & Date Code Information: See Page 2
- Weight: 0.006 grams (approximate)

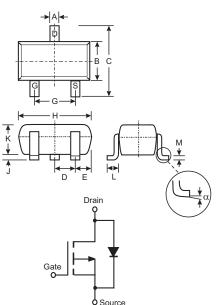

SOT-323							
Dim	Min	Max					
Α	0.25	0.40					
В	1.15	1.35					
С	2.00 2.20						
D	0.65 Nominal						
Е	0.30	0.40					
G	1.20	1.40					
н	1.80 2.20						
J	0.0 0.10						
к	0.90 1.00						
L	0.25	0.40					
М	0.10	0.18					
α	0°	8°					
All Din	All Dimensions in mm						

#### Maximum Ratings @ T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	Value	Units						
Drain-Source Voltage		V <sub>DSS</sub>	-50	V					
Drain-Gate Voltage (Note 1)		V <sub>DGR</sub>	-50	V					
Gate-Source Voltage	Continuous	V <sub>GSS</sub>	±20	V					
Drain Current (Note 1)	Continuous	ID	-130	mA					
Total Power Dissipation (Note 1)		Pd	200	mW					
Thermal Resistance, Junction to Ambient		$R_{ ext{ heta}JA}$	625	°C/W					
Operating and Storage Temperature Range		Tj, T <sub>STG</sub>	-55 to +150	°C					

Note: 1. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.

2. No purposefully added lead.

3. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com.

4. Product manufactured with Date Code 0627 (week 27, 2006) and newer are built with Green Molding Compound. Product manufactured prior to Date Code 0627 are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.



<b>Electrical Characteristics</b> $(a, T_A = 25^{\circ}C)$	unless otherw	vise spec	cified					
Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition		
OFF CHARACTERISTICS (Note 5)								
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	-50	-75		V	$V_{GS} = 0V, I_D = -250 \mu A$		
Zero Gate Voltage Drain Current	I <sub>DSS</sub>			-15 -60 -100	μA μA nA	$ \begin{array}{l} V_{DS}=-50V,  V_{GS}=0V,  T_J=25^\circ C \\ V_{DS}=-50V,  V_{GS}=0V,  T_J=125^\circ C \\ V_{DS}=-25V,  V_{GS}=0V,  T_J=25^\circ C \end{array} $		
Gate-Body Leakage	I <sub>GSS</sub>			±10	nA	$V_{GS} = \pm 20V, V_{DS} = 0V$		
ON CHARACTERISTICS (Note 5)								
Gate Threshold Voltage	V <sub>GS(th)</sub>	-0.8	-1.6	-2.0	V	$V_{DS} = V_{GS}, I_D = -1mA$		
Static Drain-Source On-Resistance	R <sub>DS</sub> (ON)	_	6	10	Ω	$V_{GS} = -5V, I_D = -0.100A$		
Forward Transconductance	<b>g</b> fs	.05			S	$V_{DS} = -25V, I_D = -0.1A$		
DYNAMIC CHARACTERISTICS								
Input Capacitance	Ciss	_		45	pF			
Output Capacitance	Coss			25	pF	$V_{DS} = -25V, V_{GS} = 0V$ f = 1.0MHz		
Reverse Transfer Capacitance	C <sub>rss</sub>		_	12	pF			
SWITCHING CHARACTERISTICS								
Turn-On Delay Time	t <sub>D(ON)</sub>		10		ns	$V_{DD} = -30V, I_D = -0.27A,$		
Turn-Off Delay Time	t <sub>D(OFF)</sub>	_	18	_	ns	$R_{GEN} = 50\Omega$ , $V_{GS} = -10V$		

# Ordering Information (Notes 4 and 6)


Device	Packaging	Shipping
BSS84W-7-F	SOT-323	3000/Tape & Reel

Notes: 4. Product manufactured with Date Code 0627 (week 27, 2006) and newer are built with Green Molding Compound. Product manufactured prior to Date Code 0627 are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.

5. Short duration test pulse used to minimize self-heating effect.


6. For Packaging Details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.

# **Marking Information**

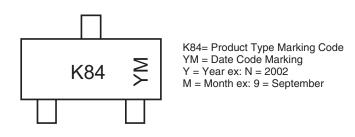

Date Code Key

Year	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009
Code	J	К	L	М	Ν	Р	R	S	Т	U	V	W
Month	Jan	Feb	March	Apr	Мау	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	0	N	D

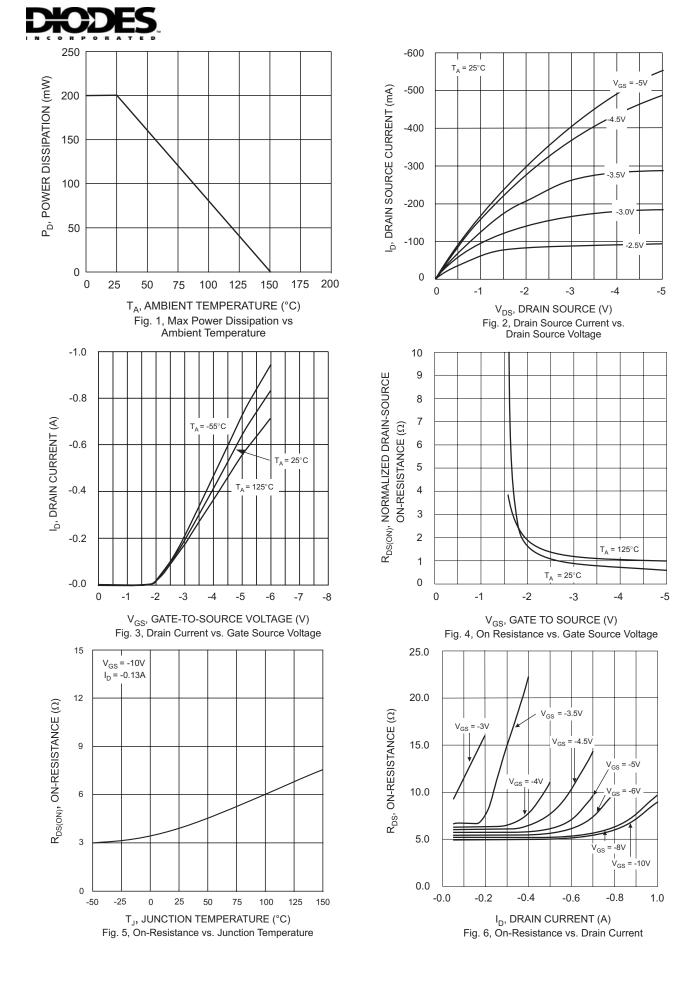



#### IMPORTANT NOTICE

Diodes, Inc. and its subsidiaries reserve the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. Diodes, Inc. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

#### LIFE SUPPORT

The products located on our website at **www.diodes.com** are not recommended for use in life support systems where a failure or malfunction of the component may directly threaten life or cause injury without the expressed written approval of Diodes Incorporated.