

## Surge Arrester

## 2-Electrode-Arrester

A81-A500X

Ordering code: B88069X1490S102

DC spark-over voltage <sup>1) 2)</sup>	500 ± 20	V %	
Impulse spark-over voltage at 100 V/µs - for 99 % of measured va - typical values of distribu	tion < 900	V V	
at 1 kV/µs - for 99 % of measured va - typical values of distribu		V V	
Nominal impulse discharge current (wave 8/20 µ Single impulse discharge current (wave 8/20 µ		kA kA	
Nominal alternating discharge current (50 Hz, 1 s Alternating discharge current (50 Hz, 9 cycles)	s) 20 100	A A	
Insulation resistance at 100 $V_{dc}$	> 10	GΩ	
Capacitance at 1 MHz	< 1.5	pF	
Arc voltage at 1 A Glow to arc transition current Glow voltage	~ 10 ~ 0.8 ~ 60	V A V	
Weight	~ 1.5	g	
Operation and storage temperature	-40 +90	°C	
Climatic category (IEC 60068-1) 40/ 90/ 21			
Marking, blue	EPCOS 500 YY O500- Nominal voltageYY- Year of productionO- Non radioactive	500 - Nominal voltage YY - Year of production	

<sup>1)</sup> At delivery AQL 0.65 level II, DIN ISO 2859 <sup>2)</sup> In ionized mode

Terms in accordance with ITU-T Rec. K.12 and DIN 57845/VDE0845




## Surge Arrester

## 2-Electrode-Arrester

A81-A500X

Ordering code: B88069X1490S102

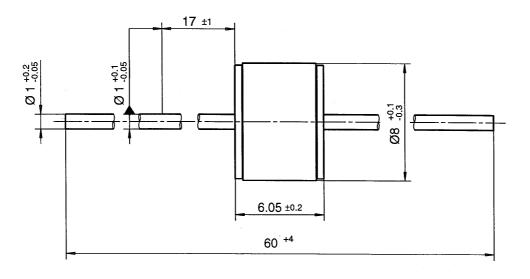

Not to scale

Dimensions in mm

Non controlled document

© EPCOS AG 2002. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.