

SAW Components

SAW RF filter TD-SCDMA

Series/type: B9030

Ordering code: B39202B9030K310

Date: March 16, 2006

Version: 2.0

[©] EPCOS AG 2005. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.



SAW Components B9030

SAW RF filter 2017.50 MHz

Data sheet




Application

- Low-loss RF filter for mobile telephone TD-SCDMA systems
- \blacksquare Impedance transformation from 50 Ω to 200 Ω
- Unbalanced to balanced operation
- Low amplitude ripple
- No matching network required
- Usable passband 15 MHz
- Suitable for GPRS class 1 to 12




Features

- Package size 2.0 x1.6 x 0.68 mm³
- Package code DCS6T
- RoHS compatible
- Approximate weight 0.012 g
- Package for Surface Mount Technology (SMT)
- Ni, gold-plated terminals
- Electrostatic Sensitive Device (ESD)



Pin configuration

- 2 Input unbalanced
- 4,6 Output balanced
- 1,3,5 To be grounded





SAW Components B9030

SAW RF filter 2017.50 MHz

Data sheet



Characteristics

Operating temperature range: $T = -25 ^{\circ}C \text{ to } +55 ^{\circ}C$

 $Z_S = 50 \Omega$ $Z_L = 200 \Omega$ Terminating source impedance: Terminating load impedance:

	min.	typ. @ 25 °C	max.	
Center frequency f _C	_	2017.5	_	MHz
2010.0 2025.0 MHz	_	2.1	2.8 1)	dB
Amplitude ripple (p-p) $\Delta\alpha$				
2010.0 2025.0 MHz	_	0.3	1.02)	dB
Input VSWR				
2010.0 2025.0 MHz	_	1.8	2.1	
Output VSWR				
2010.0 2025.0 MHz	_	1.7	2.0	
Group delay ripple (p-p)				
2010.0 2025.0 MHz	_	3	10	ns
Output amplitude balance (S_{31}/S_{21})				
2010.0 2025.0 MHz	-1.5	-1.1/-0.5	0.0	dB
Output phase balance $(\phi(S_{31}) - \phi(S_{21}) + 180^{\circ})$				
2010.0 2025.0 MHz	-2.0	1.0/2.5	5.0	•
Attenuation α				
0.0 1840.0 MHz	50	53	_	dB
1840.0 1970.0 MHz	22	25		dB
1970.0 1980.0 MHz	15	21	_	dB
1980.0 1990.0 MHz	7	11		dB
2045.0 2085.0 MHz	11 ³⁾	14	_	dB
2085.0 2120.0 MHz	22	24	_	dB
2120.0 2160.0 MHz	30	34		dB
2160.0 2300.0 MHz	36	40		dB
2300.0 3000.0 MHz	42	45	_	dB
3000.0 6000.0 MHz	42	62		dB

^{1) 3.2} dB max. at -30 °C ... 85 °C 2) 1.4 dB max. at -30 °C ... 85 °C 3) 7 dB attenuation at -30 °C ... 85 °C



SAW Components		B9030
SAW RF filter		2017.50 MHz
Data sheet	SMD	

Maximum ratings

Operable temperature range	Т	-40/+85	°C	
Storage temperature range	T_{stg}	-40/+85	°C	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}	50 ¹⁾	V	machine model, 10 pulses
Source power	P_s	7	dBm	Continuous wave

 $^{^{1)}\,}$ acc. to JESD22-A115A (machine model), 10 negative & 10 positive pulses.



SAW RF filter Data sheet Transfer function

2020

frequency [MHz]

2040

2060

2080

2100


Transfer function (wideband)

1960

1980

2000

-50 | - 1940

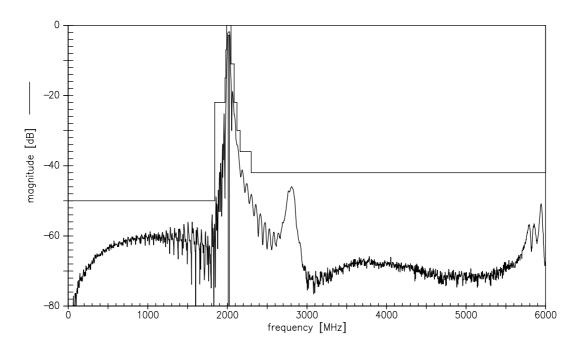




SAW Components B9030
SAW RF filter 2017.50 MHz


Data sheet



Output amplitude balance ($|S_{31}/S_{21}|$, measurement)

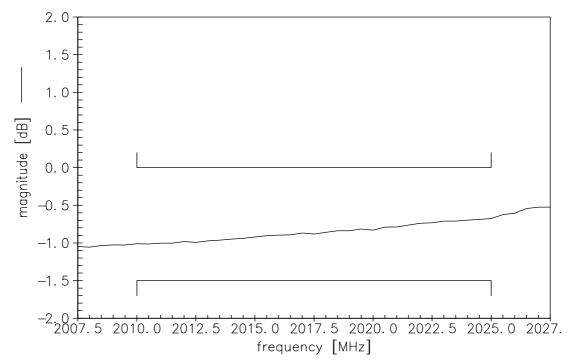

Output phase balance ($\phi(S_{31})-\phi(S_{21})+180^{\circ}$, measurement)

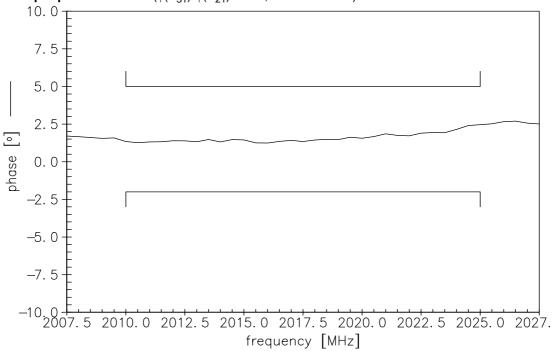



SAW Components		B9030
SAW RF filter		2017.50 MHz
Data sheet	SMD	

References

Туре	B9030	
Ordering code	B39202B9030K310	
Marking and package	C61157-A7-A128	
Packaging	F61074-V8152-Z000	
Date codes	L_1126	
S-parameters	B9030_NB.s3p B9030_WB.s3p	
Soldering profile	S_6001	

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com.

Published by EPCOS AG Surface Acoustic Wave Components Division P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2006. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.



Important notes

The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as "hazardous"). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available.
- Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).
- The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SIFI, SIKOREL, Silver-Cap, SIMID, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.