

## 30-02UYC/S599

#### **Benefits**

- . Fewer LEDs Required
- . Lowers Lighting System Cost
- . Viewing angle 50°

#### **Features**

- . High Flux Output.
- . Designed for High Current Operation.
- . Low Thermal Resistance.
- . Low Profile.
- . Packaged in Tubes for Use with Automatic Insertion Equipment.
- . The product itself will remain within RoHS compliant version
- . ESD-withstand voltage: up to 4KV



#### **Descriptions**

This revolutionary package design allows the light designer to reduce the number of LEDs required and provide a more uniform and unique illuminated appearance than with other LED solutions. This is possible through the efficient optical package design and high-current capabilities.

The low profile package can be easily coupled with reflectors or lenses to efficiently distribute light and provide the desired light appearance.

### **Applications**

- . Automotive Exterior Lighting
- . Electronic Signs and Signals
- . Special Lighting application

#### **Device Selection Guide**


| D. DELVO      | C        |                      |             |
|---------------|----------|----------------------|-------------|
| PART NO.      | Material | <b>Emitted Color</b> | Lens Color  |
| 30-02UYC/S599 | AlGaInP  | Yellow               | Water Clear |

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 1 of 7



# 30-02UYC/S599

### **Package Dimensions**

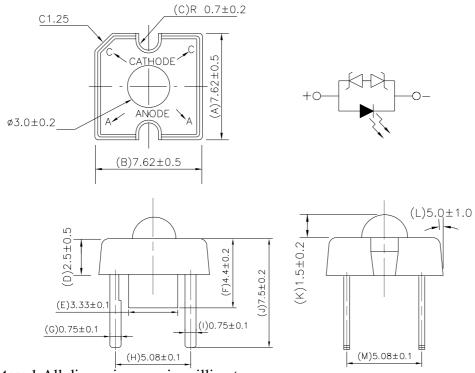

**Notes:** 1.All dimensions are in millimeters

- 2.An epoxy meniscus may extend about 1.5mm(0.059") down the leads
- 3.Tolerances unless dimensions ±0.25mm

### **Absolute Maximum Ratings (Ta=25°C)**

| Parameter                              | Symbol           | Rating      | Units                  |
|--|------------------|-------------|------------------------|
| Continuous Forward Current             | $I_{\mathrm{F}}$ | 150         | mA                     |
| Peak Forward Current(Duty 1/10 @ 1KHZ) | $I_{FP}$         | 200         | mA                     |
| Reverse Voltage                        | $V_R$            | 5           | V                      |
| Operating Temperature                  | $T_{opr}$        | -40 ~ +85   | $^{\circ}\!\mathbb{C}$ |
| Storage Temperature                    | $T_{stg}$        | -55 ~ +100  | $^{\circ}\mathbb{C}$   |
| Soldering Temperature(T=5 sec)         | $T_{sol}$        | $260 \pm 5$ | $^{\circ}\mathbb{C}$   |
| LED Junction Temperature               | $T_{\rm j}$      | 125         | $^{\circ}\mathbb{C}$   |
| Power Dissipation                      | $P_d$            | 400         | mW                     |
| Electrostatic Discharge                | ESD              | 4K          | V                      |

Everlight Electronics Co., Ltd.

http:\\www.everlight.com

Rev. 2

Page: 2 of 7

Device number: DLE-320-002

Established date: 06-22-2007

Established by: Jim Lin



# 30-02UYC/S599

# **Electro-Optical Characteristics (Ta=25°C)**

| Parameter                       | Symbol  | Min.  | Тур.  | Max.  | Condition             | Unit |
|---------------------------------|---------|-------|-------|-------|-----------------------|------|
| Total Flux                      | Фи      | 9000  | 11000 | 18000 | I <sub>F</sub> =150mA | mlm  |
| Viewing Angle                   | 2 θ 1/2 |       | 50    |       | I <sub>F</sub> =150mA | deg  |
| Peak Wavelength                 | λр      |       | 591   |       | I <sub>F</sub> =70mA  | nm   |
| <b>Dominant Wavelength</b>      | λd      | 585.5 | 590   | 594.5 | I <sub>F</sub> =70mA  | nm   |
| Spectrum Radiation<br>Bandwidth | Δλ      |       | 15    |       | I <sub>F</sub> =70mA  | nm   |
| Forward Voltage                 | VF      | 1.9   | 2.3   | 2.9   | I <sub>F</sub> =150mA | V    |
| Reverse Current                 | IR      |       |       | 10    | V <sub>R</sub> =10V   | uA   |

# **Rank** 30-02UYC/S599

| (1)   | (2)     | (2)   |
|-------|---------|-------|
| ( 1 ) | 11 / 11 | ( 1   |
| N I J | ( 4 /   | ( ) / |
|       |         |       |

|     | (1) VF(V) | )   | (2) $\lambda d(nm)$ |       | $(3)\Phi v(mlm)$ |     | n)    |       |
|-----|-----------|-----|---------------------|-------|------------------|-----|-------|-------|
| Bin | Min       | Max | Bin                 | Min   | Max              | Bin | Min   | Max   |
| L   | 1.9       | 2.1 | 2                   | 585.5 | 587.0            | U   | 9000  | 11250 |
| M   | 2.1       | 2.3 | 3                   | 587.0 | 588.5            | V   | 11250 | 14250 |
| N   | 2.3       | 2.5 | 4                   | 588.5 | 590.0            | W   | 14250 | 18000 |
| P   | 2.5       | 2.7 | 5                   | 590.0 | 591.5            |     |       |       |
| Q   | 2.7       | 2.9 | 6                   | 591.5 | 593.0            |     |       |       |
|     |           |     | 7                   | 593.0 | 594.5            |     |       |       |

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 3 of 7

<sup>\*</sup>Measurement Uncertainty of Forward Voltage: ±0.1V

<sup>\*</sup>Measurement Uncertainty of Luminous Intensity: ±15%


<sup>\*</sup>Measurement Uncertainty of Dominant Wavelength ±1.0nm




# 30-02UYC/S599

#### **Typical Electro-Optical Characteristics Curves**


#### Relative Intensity vs. Wavelength




#### **Relative Intensity vs. Forward Current**




#### Relative Intensity vs. Angle Displacement

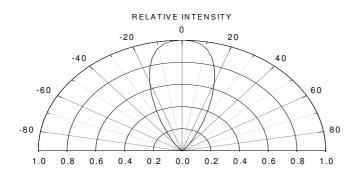


#### Forward Current vs. Forward Voltage



#### Forward Current vs. Ambient Temp.



Relative Intensity vs. Off Axis Angle



Everlight Electronics Co., Ltd.

Device number: DLE-320-002

http:\\www.everlight.com

Established date: 06-22-2007

Rev. 2

Page: 4 of 7

Established by: Jim Lin




### 30-02UYC/S599

#### **Packing Quantity Specification**

- (1) 60 pcs/1 tube, 30 tubes/1 small inside box, 12 small inside boxes/1 outside box
- (2) 60 pcs/1 tube, 105 tubes/1 big inside box, 4 big inside boxes/1 outside box

### **Label Form Specification**

(1)Tube Label Form



#### (2)Box Label Form

| EVERLIGHT      |                   |
|----------------|-------------------|
| CPN:           |                   |
| P/N:           |                   |
|                | <sub>  RoHS</sub> |
| 30-02UYC/S599  |                   |
| QTY:           | CAT:              |
|                | HUE:              |
| LOT NO:        | REF:              |
|                |                   |
| MADE IN TAIWAN | N                 |

PART NO: Everlgiht's Production Number

QTY: Packing Quantity LOT NO: Lot Number

CAT: Ranks of Forward Voltage, Dominant Wavelength and Total Flux

CPN: Customer's Production Number

P/N: Production Number

HUE: Reference REF: Reference

MADE IN TAIWAN: Production Place

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev. 2 Page: 5 of 7


Device number: DLE-320-002 Established date: 06-22-2007 Established by: Jim Lin



### 30-02UYC/S599

#### **Notes**

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 4. Below the zener reference voltage Vz, all the current flows through LED and as the voltage rises to Vz, the zener diode "breakdown." If the voltage tries to rise above Vz current flows through the zener branch to keep the voltage at exactly Vz.
- 5. When the LED is connected using serial circuit, if either piece of LED is no light up but current can't flow through causing others to light down. In new design, the LED is parallel with zener diode, if either piece of LED is no light up but current can flow through causing others to light.



Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 6 of 7



### 30-02UYC/S599

#### 6. Soldering Condition

Careful attention should be paid during soldering. When soldering, leave more then 3mm from solder joint to case, and soldering beyond the base of the tie bar is recommended.

Avoiding applying any stress to the lead frame while the LEDs are at high temperature particularly when soldering.

Recommended soldering conditions:

| Hand                 | Soldering             | DIP Soldering |                          |  |
|----------------------|-----------------------|---------------|--------------------------|--|
| Temp. at tip of iron | 400°C Max. (30W Max.) | Preheat temp. | 100°C Max. (60 sec Max.) |  |
| Soldering time       | 3 sec Max.            | Bath temp.    | 265 Max.                 |  |
| Distance             | 3mm Min.(From solder  | Bath time.    | 5 sec Max.               |  |
|                      | joint to case)        |               |                          |  |
|                      |                       | Distance      | 3mm Min.                 |  |

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

http:\\www.everlight.com

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 7 of 7