## **Pressure**

# **Freescale Semiconductor**

# 100 kPa On-Chip Temperature Compensated Silicon Pressure Sensors

The MPX2102 series devices are silicon piezoresistive pressure sensors providing a highly accurate and linear voltage output directly proportional to the applied pressure. The sensor is a single, monolithic silicon diaphragm with the strain gauge and a thin-film resistor network integrated on-chip. The chip is laser trimmed for precise span and offset calibration and temperature compensation.

## Features

- Temperature Compensated Over 0°C to +85°C
- Easy-to-Use Chip Carrier Package Options
- Available in Absolute, Differential and Gauge Configurations
- Absolute, Differential and Gauge Options

MPX2102 Rev 7, 10/2008

# MPX2102 Series

0 to 100 kPa (0 to 14.5 psi) 40 mV Full Scale (Typical)

### **Application Examples**

- Pump/Motor Control
- Robotics
- Level Detectors
- Medical Diagnostics
- Pressure Switching
- Barometers
- Altimeters

			ORD	ERING IN	FORMAT	ION			
Device Name	Package	Case		# of Ports	;		Pressure Type	)	Device Marking
	Options	No.	None	Single	Dual	Gauge	Differential	Absolute	Device Marking
Unibody Package	(MPX2102 Series)								
MPX2102A	Tray	344	•					٠	MPX2102A
MPX2102DP	Tray	344C			٠		•		MPX2102DP
MPX2102AP	Tray	344B		•				•	MPX2102AP
MPX2102GP	Tray	344B		•		•			MPX2102GP
MPX2102ASX	Tray	344F		•				•	MPX2102A
MPX2102GVP	Tray	344D		•		•			MPX2102GVP
Small Outline Pac	kage (MPXV2102G	Series)				•			
MPXV2102GP	Tray	1369		•		•			MPXV2102GP
MPAK Package (M	PXM2102 Series)					•			
MPXM2102A	Rail	1320	•					•	MPXM2102A
MPXM2102AT1	Tape and Reel	1320	•					•	MPXM2102A
MPXM2102GS	Rail	1320A		•		•			MPXM2102GS
MPXM2102GST1	Tape and Reel	1320A		•		•			MPXM2102GS
MPXM2102AS	Rail	1320A		•				•	MPXM2102AS
MPXM2102AST1	Tape and Reel	1320A		•				٠	MPXM2102AS



MPX2102A

CASE 344-15

### UNIBODY PACKAGES



MPX2102AP/GP CASE 344B-01



MPX2102DP CASE 344C-01



MPX2102GVP CASE 344D-01

MPAK



MPX2102ASX CASE 344F-01

### SMALL OUTLINE PACKAGES

MPXV2102GP CASE 1369-01

MPXM2102A CASE 1320-02



MPXM2102GS/AS CASE 1320A-02

## **Operating Characteristics**

### Table 1. Operating Characteristics ( $V_S = 10 V_{DC}$ , $T_A = 25^{\circ}C$ unless otherwise noted, P1 > P2)

Characteristic	Symbol	Min	Тур	Max	Units
Differential Pressure Range <sup>(1)</sup>	P <sub>OP</sub>	0	_	100	kPa
Supply Voltage <sup>(2)</sup>	VS	_	10	16	V <sub>DC</sub>
Supply Current	Ι <sub>Ο</sub>	_	6.0	—	mAdc
Full Scale Span <sup>(3)</sup>	V <sub>FSS</sub>	38.5	40	41.5	mV
Offset <sup>(4)</sup> MPX2102D Series MPX2102A Series MPXM2102D/G Series MPXM2102A Series	V <sub>OFF</sub> V <sub>OFF</sub>	-1.0 -2.0 -1.0 -2.0	 	1.0 2.0 1.0 2.0	mV mV
Sensitivity	$\Delta V / \Delta P$		0.4		mV/kPa
Linearity <sup>(5)</sup> MPX2102D Series MPX2102A Series MPXM2102D/G Series MPXM2102A Series	 	-0.6 -1.0 -0.6 -1.0		0.4 1.0 0.4 1.0	%V <sub>FSS</sub> %V <sub>FSS</sub>
Pressure Hysteresis <sup>(5)</sup> (0 to 100 kPa)	_	_	±0.1	_	%V <sub>FSS</sub>
Temperature Hysteresis <sup>(5)</sup> (- 40°C to +125°C)	_	_	±0.5	—	%V <sub>FSS</sub>
Temperature Coefficient of Full Scale Span <sup>(5)</sup>	TCV <sub>FSS</sub>	-2.0	—	2.0	%V <sub>FSS</sub>
Temperature Coefficient of Offset <sup>(5)</sup>	TCV <sub>OFF</sub>	-1.0	—	1.0	mV
Input Impedance	Z <sub>IN</sub>	1000	—	2500	W
Output Impedance	Z <sub>OUT</sub>	1400	—	3000	W
Response Time <sup>(6)</sup> (10% to 90%)	t <sub>R</sub>	_	1.0	—	ms
Warm-Up Time	—	_	20	—	ms
Offset Stability <sup>(7)</sup>	_	_	±0.5	—	%V <sub>FSS</sub>

1. 1.0 kPa (kiloPascal) equals 0.145 psi.

- 2. Device is ratiometric within this specified excitation range. Operating the device above the specified excitation range may induce additional error due to device self-heating.
- 3. Full Scale Span (V<sub>FSS</sub>) is defined as the algebraic difference between the output voltage at full rated pressure and the output voltage at the minimum related pressure.
- 4. Offset (V<sub>OFF</sub>) is defined as the output voltage at the minimum rated pressure.
- 5. Accuracy (error budget) consists of the following:
  - Linearity: Output deviation from a straight line relationship with pressure, using end point method, over the specified pressure range.
  - Temperature Hysteresis:Output deviation at any temperature within the operating temperature range, after the temperature is cycled to and from the minimum or maximum operating temperature points, with zero differential pressure applied.
  - Pressure Hysteresis: Output deviation at any pressure with the specified range, when this pressure is cycled to and from the minimum or maximum rated pressure at 25°C.
  - CSpan: Output deviation at full rated pressure over the temperature range of 0 to 85°C, relative to 25°C.
- TcOffset: Output deviation with minimum rated pressure applied, over the temperature range of 0 to 85°C, relative to 25°C.
- 6. Response Time is defined as the time from the incremental change in the output to go from 10% to 90% of its final value when subjected to a specified step change in pressure.
- 7. Offset stability is the product's output deviation when subjected to 1000 hours of Pulsed Pressure, Temperature Cycling with Bias Test.

### **Maximum Ratings**

#### Table 2. Maximum Ratings<sup>(1)</sup>

Rating	Symbol	Value	Unit
Maximum Pressure (P1 > P2)	P <sub>MAX</sub>	400	kPa
Storage Temperature	T <sub>STG</sub>	-40 to +125	°C
Operating Temperature	T <sub>A</sub>	-40 to +125	°C

1. Exposure beyond the specified limits may cause permanent damage or degradation to the device.

## **Voltage Output versus Applied Differential**

The differential voltage output of the sensor is directly proportional to the differential pressure applied.

The absolute sensor has a built-in reference vacuum. The output voltage will decrease as vacuum, relative to ambient, is drawn on the pressure (P1) side.

The output voltage of the differential or gauge sensor increases with increasing pressure applied to the pressure

(P1) side relative to the vacuum (P2) side. Similarly, output voltage increases as increasing vacuum is applied to the vacuum (P2) side relative to the pressure (P1) side.

Figure 1 illustrates a block diagram of the internal circuitry on the stand-alone pressure sensor chip.




Figure 1. Temperature Compensated Pressure Sensor Schematic

## **On-Chip Temperature Compensation and Calibration**

Figure 2 shows the output characteristics of the MPX2102 series at 25°C. The output is directly proportional to the differential pressure and is essentially a straight line.

The effects of temperature on Full Scale Span and Offset are very small and are shown under Operating Characteristics.

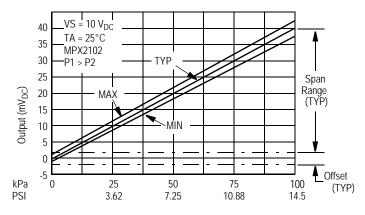


Figure 2. Output vs. Pressure Differential

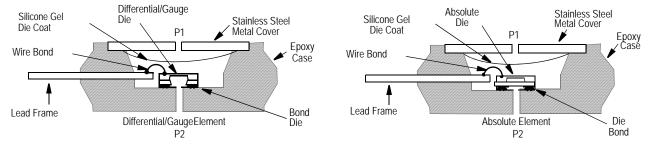




Figure 3 illustrates the absolute sensing configuration (right) and the differential or gauge configuration in the basic chip carrier (Case 344). A silicone gel isolates the die surface and wire bonds from the environment, while allowing the pressure signal to be transmitted to the silicon diaphragm.

The MPX2102 series pressure sensor operating characteristics and internal reliability and qualification tests are based on use of dry air as the pressure media. Media other than dry air may have adverse effects on sensor performance and long term reliability. Contact the factory for information regarding media compatibility in your application.

#### LINEARITY

Linearity refers to how well a transducer's output follows the equation:  $V_{OUT} = V_{OFF}$  + sensitivity x P over the operating pressure range. There are two basic methods for calculating nonlinearity: (1) end point straight line fit (see Figure 4) or (2) a least squares best line fit. While a least squares fit gives the "best case" linearity error (lower numerical value), the calculations required are burdensome.

Conversely, an end point fit will give the "worst case" error (often more desirable in error budget calculations) and the calculations are more straightforward for the user. Freescale's specified pressure sensor linearities are based on the end point straight line method measured at the midrange pressure.




Figure 4. Linearity Specification Comparison

## Pressure

### PRESSURE (P1)/VACUUM (P2) SIDE IDENTIFICATION TABLE

Freescale designates the two sides of the pressure sensor as the Pressure (P1) side and the Vacuum (P2) side. The Pressure (P1) side is the side containing the silicone gel which isolates the die. The differential or gauge sensor is designed to operate with positive differential pressure applied, P1 > P2. The absolute sensor is designed for vacuum applied to P1 side.

The Pressure (P1) side may be identified by using Table 3.

### Table 3. Pressure (P1) Side Delineation

Part Number	Case Type	Pressure (P1) Side Identifier
MPX2102A	344	Stainless Steel Cap
MPX2102DP	344C	Side with Part Marking
MPX2102AP, MPX2102GP	344B	Side with Port Attached
MPX2102GVP	344D	Stainless Steel Cap
MPX2102ASX	344F	Side with Port Marking
MPXV2102GP	1369	Side with Port Attached
MPXM2102A, MPX2102ATI	1320	Stainless Steel Cap
MPXM2102AS, MPXM2102GS, MPXM2102ASTI, MPXM2102GSTI	1320A	Side with Port Attached

#### MPX2102


## PACKAGE DIMENSIONS


← R →

บัน

L

G






NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
   CONTROLLING DIMENSION: INCH.
   DIMENSION -A- IS INCLUSIVE OF THE MOLD STOP RING. MOLD STOP RING NOT TO EXCEED 16.00 (0.630).

	INC	HES	MILLIM	ETERS	
DIM	MIN	MAX	MIN	MAX	
Α	0.595	0.630	15.11	16.00	
В	0.514	0.534	13.06	13.56	
С	0.200	0.220	5.08	5.59	
D	0.016	0.020	0.41	0.51	
F	0.048	0.064	1.22	1.63	
G	0.100	) BSC	2.54 BSC		
J	0.014	0.016	0.36	0.40	
L	0.695	0.725	17.65	18.42	
Μ	30°	NOM	30° N	MON	
Ν	0.475	0.495	12.07	12.57	
R	R 0.430 0.450	0.450	10.92	11.43	
Y	0.048	0.052	1.22	1.32	
Z	0.106	0.118	2.68	3.00	

CASE 344-15 **ISSUE AA UNIBODY PACKAGE** 

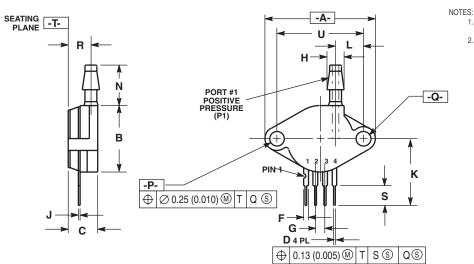


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

2. CONTROLLING DIMENSION: INCH.

	INC	HES	MILLIN	IETERS	
DIM	MIN	MAX	MIN	MAX	
Α	1.145	1.175	29.08	29.85	
В	0.685	0.715	17.40	18.16	
С	0.305	0.325	7.75	8.26	
D	0.016	0.020	0.41	0.51	
F	0.048 0.064		1.22	1.63	
G	0.10	) BSC	2.54	BSC	
н	0.182	0.194	4.62	4.93	
J	0.014	0.016	0.36	0.41	
κ	0.695	0.725	17.65	18.42	
L	0.290	0.300	7.37	7.62	
Ν	0.420	0.440	10.67	11.18	
Р	0.153	0.159	3.89	4.04	
Q	0.153	0.159	3.89	4.04	
R	0.230	0.250	5.84	6.35	
S	0.220	0.240	5.59	6.10	
U	0.91	) BSC	23.11	I BSC	

CASE 344B-01 **ISSUE B UNIBODY PACKAGE**  16

### PACKAGE DIMENSIONS

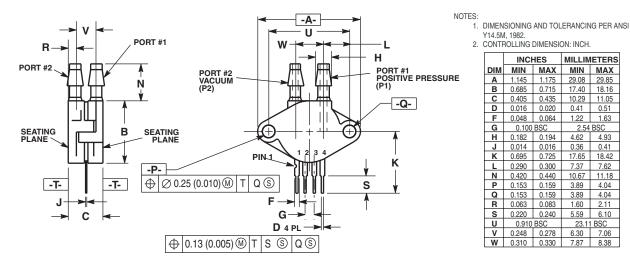

	INCI	IES	MILLIMETERS				
DIM	MIN	MAX	MIN	MAX			
Α	1.145	1.175	29.08	29.85			
В	0.685	0.715	17.40	18.16			
С	0.405	0.435	10.29	11.05			
D	0.016	0.020	0.41	0.51			
F	0.048	0.064	1.22	1.63			
G	0.100	BSC	2.54 BSC				
н	0.182	0.194	4.62	4.93			
J	0.014	0.016	0.36	0.41			
Κ	0.695	0.725	17.65	18.42			
L	0.290	0.300	7.37	7.62			
Ν	0.420	0.440	10.67	11.18			
Р	0.153	0.159	3.89	4.04			
Q	0.153	0.159	3.89	4.04			
R	0.063	0.083	1.60	2.11			
s	0.220	0.240	5.59	6.10			
U	0.910	BSC	23.11 BSC				
٧	0.248	0.278	6.30	7.06			
w	0.310	0.330	7.87	8.38			

......

INCHES MILLIMETERS 
 DIM
 MIN
 MAX
 MIN
 MAX

 A
 1.145
 1.175
 29.08
 29.85

7.75

1.22

4.62 4.93 0.36

18.16

8.26

0.51

2.54 BSC

1.63

0.41

4.04

0.715 17.40

 K
 0.695
 0.725
 17.65
 18.42

 L
 0.290
 0.300
 7.37
 7.62

 N
 0.420
 0.440
 10.67
 11.18

P 0.153 0.159 3.89 4.04 Q 0.153 0.158 3.89

 R
 0.230
 0.250
 5.84
 6.35

 S
 0.220
 0.240
 5.59
 6.10

 U
 0.910 BSC
 23.11 BSC

0.305 0.325

0.048 0.064

0.100 BSC

 H
 0.182
 0.194

 J
 0.014
 0.016

**D** 0.016 0.020 0.41

Y14.5M, 1994.


В 0.685

С

F


G

CASE 344C-01 **ISSUE B UNIBODY PACKAGE** 

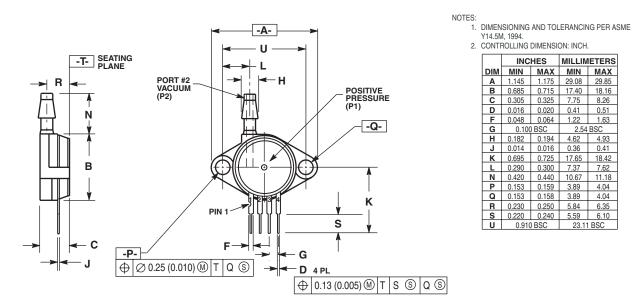

CASE 344D-01 **ISSUE B UNIBODY PACKAGE** 

## **PACKAGE DIMENSIONS**

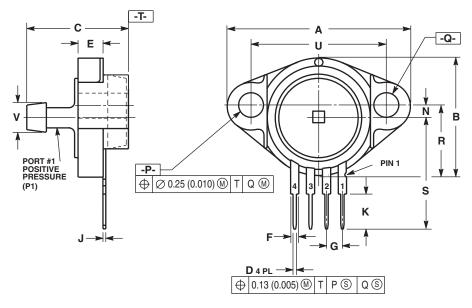


NOTES:
--------

DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 CONTROLLING DIMENSION: INCH.

	INC	HES	MILLIN	IETERS	
DIM	MIN	MAX	MIN	MAX	
Α	1.080	1.120	27.43	28.45	
В	0.740	0.760	18.80	19.30	
С	0.630	0.650	16.00	16.51	
D	E 0.160 0.180		0.41	0.51	
Е			4.06	4.57	
F			1.22	1.63	
G	0.100 BSC		2.54	BSC	
J	0.014	0.016	0.36	0.41	
Κ	0.220	0.240	5.59	6.10	
Ν	0.070	0.080	1.78	2.03	
Ρ	0.150 0.160		3.81	4.06	
Ø	0.150	0.160	3.81	4.06	
R	0.440	0.460	11.18	11.68	
s	0.695	0.725	17.65	18.42	
U	0.840	0.860	21.34	21.84	
٧	0.182	0.194	4.62	4.92	

CASE 344F-01 **ISSUE B UNIBODY PACKAGE** 

## PACKAGE DIMENSIONS

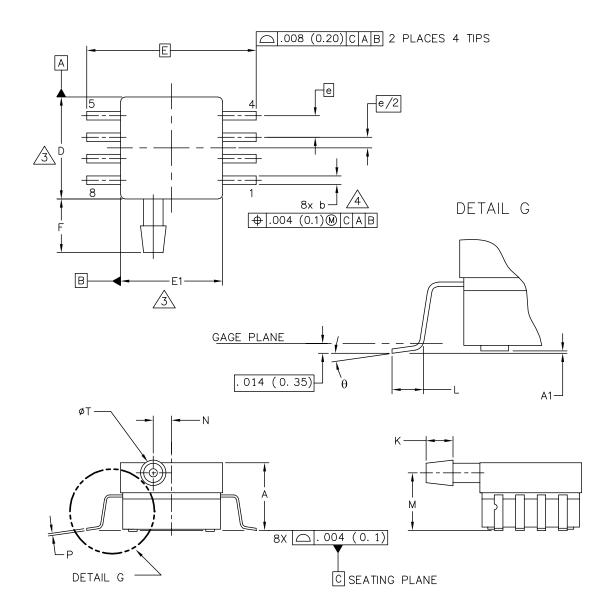

© FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED.	MECHANICAL OUTLINE	PRINT VERSION N	OT TO SCALE
TITLE:	DOCUMENT N	0: 98ASA99303D	REV: B
8 LD SOP, SIDE PC	DRT CASE NUMBE	R: 1369–01	24 MAY 2005
	STANDARD: N	ON-JEDEC	

### CASE 1369-01 ISSUE B SMALL OUTLINE PACKAGE

### CASE 1369-01 **ISSUE B** SMALL OUTLINE PACKAGE

PAGE 2 OF 2

	INC	HES	MIL	LIMETERS		Ι	NCHES	MI	LLIMETERS
DIM	MIN	MAX	MIN	MAX	DIM	MIN	MAX	MIN	MAX
A	. 300	. 330	7.11	7.62	θ	0°	7°	0°	7 <b>°</b>
A 1	. 002	. 010	0. 05	0. 25	-				
b	. 038	. 042	0.96	1.07	-				
D	. 465	. 485	11.81	12.32	-				
E	. 717	7 BSC	18	.21 BSC	-				
E1	. 465	. 485	11.81	12.32	-				
e	. 100	) BSC	2.	2.54 BSC					
F	. 245	. 255	6. 22	6.47	-				
к	. 120	. 130	3. 05	3. 30	-				
L	. 061	. 071	1. 55	1.80	-				
м	. 270	. 290	6. 86	7.36	-				
N	. 080	. 090	2. 03	2. 28	-				
Р	. 009	. 011	0. 23	0.28	-				
Т	. 115	. 125	2. 92	3. 17	-				
	FREESCALE SE	MICONDUCTOR.	INC.						
	ALL RIGH	HTS RESERVED.	MECHANICA		ILINE	PRINI VER:	SION NO	OT TO SCALE	
TITLE:					DOCI	JMENT NO	): 98ASA99303	3D	REV: B
	8 L[	D SOP, S	IDE PO	DRT	CASE NUMBER: 1369-01 24 MAY 200				24 MAY 2005
					STAI	NDARD: NO	N-JEDEC		

 $\underline{\mathbb{A}}$  dimension does not include dambar protrusion. Allowable dambar PROTRUSION SHALL BE .008 (0.203) MAXIMUM.

MOLD FLASH AND PROTRUSIONS SHALL NOT EXCEED .006 (0.152) PER SIDE.


NOTES: 1. CONTROLLING DIMENSION: INCH


**Pressure** 

2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.

A DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PPROTRUSIONS.

## PACKAGE DIMENSIONS

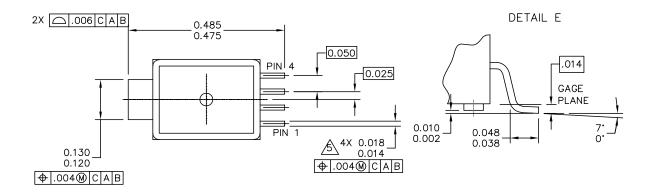

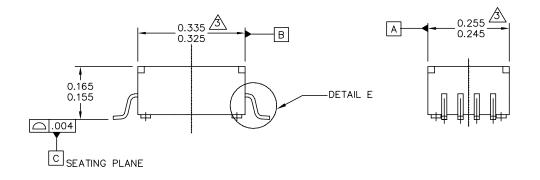

© FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED.	MECHANICA	L OUTLINE	PRINT VERSION NO	IT TO SCALE
TITLE:		DOCUMENT NE	1: 98ARH99088A	RE∨: B
5 LD M-PAC		CASE NUMBER	2: 1320-02	22 JUL 2005
		STANDARD: NE	IN-JEDEC	

### CASE 1320-02 ISSUE B MPAK

### MPX2102

#### NOTES:


- 1. DIMENSIONS ARE IN INCHES.
- 2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
- A DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSION. MOLD FLASH OR PROTRUSION SHALL NOT EXCEED .006" PER SIDE.
- 4. ALL VERTICAL SURFACES TO BE 5' MAXIMUM.

A DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION.

- PIN 1: GND PIN 2: +Vc PIN 3: Vs +Vout
- PIN 4: -Vout

© FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED.	MECHANICAL OUTLINE		PRINT VERSION NOT TO SCALE	
TITLE:		DOCUMENT NO	): 98ARH99088A	REV: B
5 LD M-PAC	CASE NUMBER	8: 1320–02	22 JUL 2005	
		STANDARD: NON-JEDEC		

### CASE 1320-02 **ISSUE B MPAK**

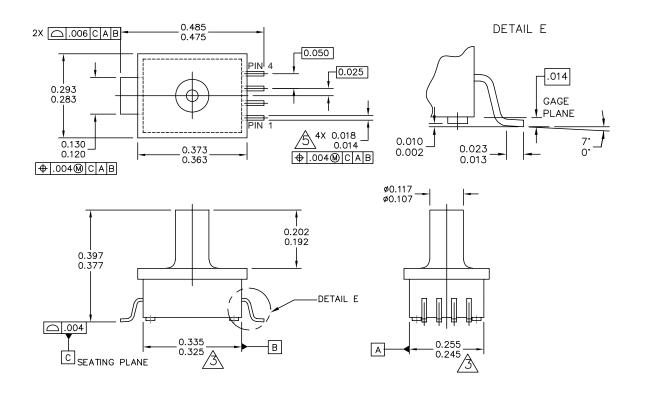

© FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED.		PRINT VERSION NOT TO SCALE		
TITLE: 5 LD M-PAC, PORTED		DOCUMENT NO	): 98ARH99087A	REV: A
		CASE NUMBER	R: 1320A-02	22 JUL 2005
		STANDARD: NON-JEDEC		

### CASE 1320A-02 ISSUE A MPAK

### MPX2102

NOTES:

- 1. DIMENSIONS ARE IN INCHES.
- 2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.

A DIMENSIONS DOES NOT INCLUDE MOLD FLASH OR PROTRUSION. MOLD FLASH OR PROTRUSION SHALL NOT EXCEED .006" PER SIDE.

4. ALL VERTICAL SURFACES TO BE 5" MAXIMUM.

5. DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .008 MAXIMUM.

© FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED.	MECHANICAL OUTLINE	PRINT VERSION N	OT TO SCALE	
TITLE:	DOCUMENT	NO: 98ARH99087A	REV: A	
5 LD M-PAC, PORT	TED CASE NUM	BER: 1320A-02	22 JUL 2005	
	STANDARD	STANDARD: NON-JEDEC		

### CASE 1320A-02 ISSUE A MPAK

#### How to Reach Us:

Home Page: www.freescale.com

Web Support: http://www.freescale.com/support

#### **USA/Europe or Locations Not Listed:**

Freescale Semiconductor, Inc. Technical Information Center, EL516 2100 East Elliot Road Tempe, Arizona 85284 1-800-521-6274 or +1-480-768-2130 www.freescale.com/support

#### Europe, Middle East, and Africa:

Freescale Halbleiter Deutschland GmbH Technical Information Center Schatzbogen 7 81829 Muenchen, Germany +44 1296 380 456 (English) +46 8 52200080 (English) +49 89 92103 559 (German) +33 1 69 35 48 48 (French) www.freescale.com/support

#### Japan:

Freescale Semiconductor Japan Ltd. Headquarters ARCO Tower 15F 1-8-1, Shimo-Meguro, Meguro-ku, Tokyo 153-0064 Japan 0120 191014 or +81 3 5437 9125 support.japan@freescale.com

#### Asia/Pacific:

Freescale Semiconductor China Ltd. Exchange Building 23F No. 118 Jianguo Road Chaoyang District Beijing 100022 China +86 010 5879 8000 support.asia@freescale.com

#### For Literature Requests Only:

Freescale Semiconductor Literature Distribution Center P.O. Box 5405 Denver, Colorado 80217 1-800-441-2447 or +1-303-675-2140 Fax: +1-303-675-2150 LDCForFreescaleSemiconductor@hibbertgroup.com Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale<sup>™</sup> and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners. © Freescale Semiconductor, Inc. 2008. All rights reserved.



MPX2102 Rev. 7 10/2008