




# JMK Inc.

# FF-1319-13C

This filter has been designed to operate with the Vicor "VI- HAMD / BAMD harmonic attenuator modules" to meet EN55022, class B.  
This model is identical to the (-13) except for the form factor of the enclosure.

Order P/N: FF-1319-13C

Operating Voltage = DC to 250 Vac  
Operating Current (Max)= 13A  
Frequency = 50/60 HZ  
Temp. Range (Storage) = -40 to 85 C  
Temp Range (Operating) @ 12.6 A = -20 to 45 C  
Diel. Withstanding Voltage (Ph - Case) = 1500 Vac  
Diel Withstanding Voltage (Ph - Ph) = 1500 Vdc  
Leakage current @ 250 Vac, 60 HZ = 2.5 MA max.  
Discharge Voltage after 60 sec = 34 V max.

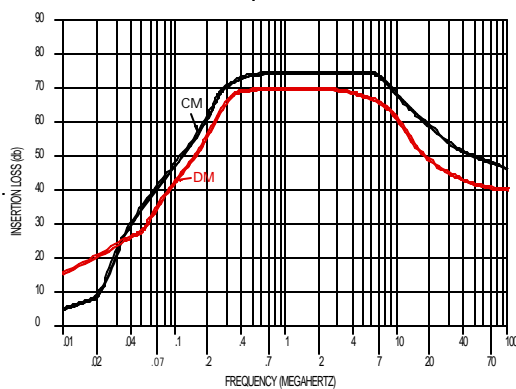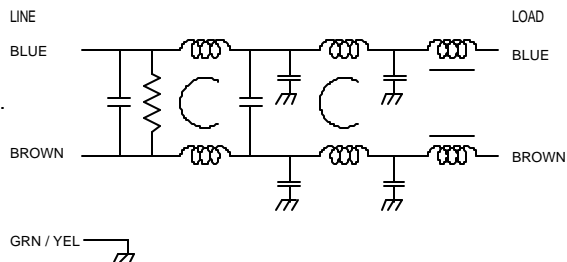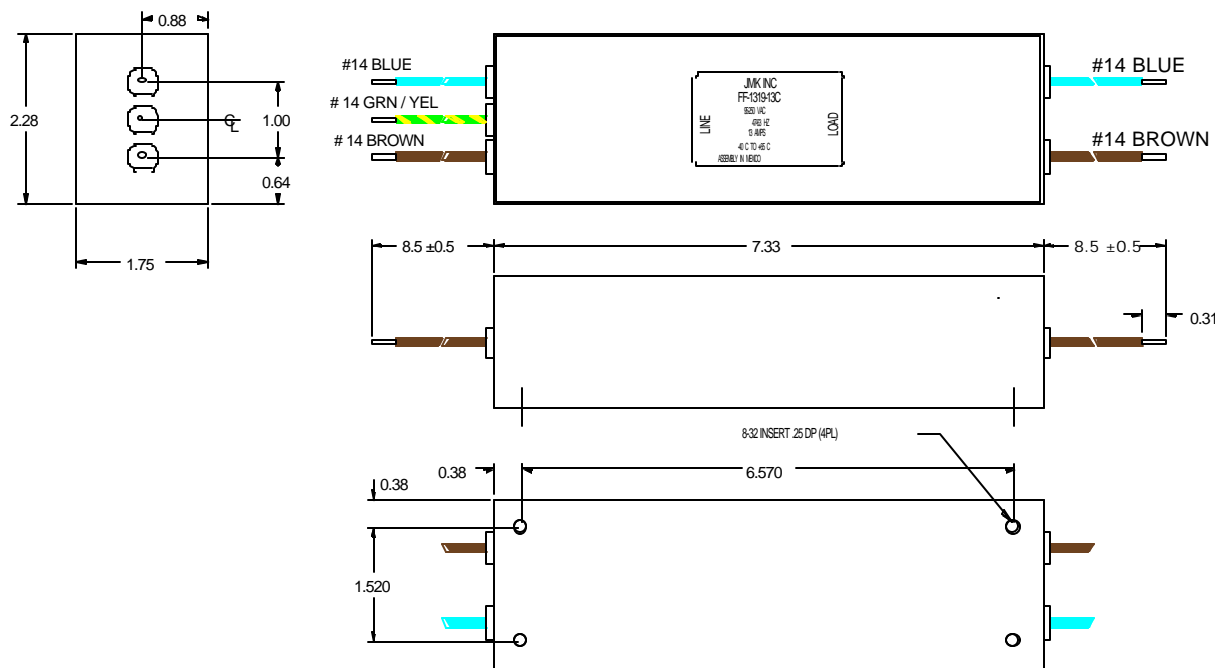

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115  
email: info@jmkfilters.com  
EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785130729 FX: 44-(0) 141 589 1884