100 Watt HY Series



FEATURES

- Low Profile 1.2" High
- Wide Range Input
- Meets International Safety and EMI Specifications
 - –UL 1950 Recognized
 - -CSA 22.2 No. 234 Certified
 - -EN 60950(TUV Certified)
 - -Independently Tested to FCC Part 15 Class B.
 VDE 0871 Class B and VCCI Class 2.
 - –CE
- MTBF > 300,000 Hours
- 5, 12 or 24 Volt Models
- Totally Enclosed
- LED Indicator
- Hyper-Resonant Converter
- Remote Sense, Remote On/Off

SPECIFICATIONS

INPUT

Voltage 85 - 132 / 170 - 264VAC (auto selection)

Frequency 47 - 63 Hz

Current

Full Load 100 VAC - 2.4A (RMS)

200 VAC - 1.4A (RMS)

Inrush 100 VAC - 15A

200 VAC - 30A

OUTPUT

Regulation

Total $\pm 3\%$ Line (static) $\pm 0.1\%$ Line (dynamic) $\pm 0.4\%$ Load (static) $\pm 0.5\%$

Load (dynamic) ±0.7% (for ±10% change of nominal

output current)

Drift ±0.5% (for 8 hours after 10 min. warm-up)

Temp. Coefficient ±0.02% Ripple & Noise (peak-to-peak)

1% +70 mV max.

(measured at 25°C with a bandwidth of 50 MHz)

Hold-up Time 16 mS min.

(measured at 100 VAC, full load, 25°C)

Rise Time 300 mS max.

(measured at 100 VAC, full load, 25°C)

Converter Topology Resonant Converter

Operating Frequency 450 KHz

PROTECTION

Overvoltage All models are protected against overvoltage.

Control circuit is preset so output voltage does

not exceed the following values:

Output V 5 12 24 Max. OVP 6.9 15.5 31.0

Overload All models are protected against overload. The

control circuit has a foldback characteristic with

the knee set at 110% of full-rated load. Recovery is automatic after removal of

the fault.

DataSheet4U.com

Input Noise Tolerance

Line-Neutral 1000V 800 nS Line-Line 1000V 800 ns

(connected equipment will continue to function and protection equipment will not activate falsely)

Lightning

Surge Tolerance 1200V peak, 1 msec rise time from 10% to 90%

load. 40 msec decay from 90% to 10% load. (power supply will not be damaged, nor will its protection circuits activate falsely)

ESD Tolerance

FG Terminal-Cover 10 KV (ESD probe fitted with 500 pf and

100 ohms in parallel with probe output) (power supply will not be damaged, nor will its protection circuits activate falsely)

Remote Sense Control Circuit automatically compensates for

up to 0.5V lead drop.

INSULATION

All models meet the requirements of UL1950, CSA 22.2 No. 234, and EN60950 for Input-to-Chassis, Input-to-Output, Output-to-Chassis and Leakage Current specifications. See Engineering Section.

ENVIRONMENT

Operating Temp. -10 to +40°C at full load.

Storage Temp. –25 to +85°C

Operating Humidity 10 - 90%, (non-condensing) Storage Humidity 10 - 95%, (non-condensing)

Shock 100

Vibration 2G, 10 - 55 Hz, 0.75 mm amplitude

(non-operating)

MODEL SPECIFICATIONS

Model Number	Output Voltage	Output Current	Efficiency
HY05020GN	5.0 ± 10%	0-20A	81%
HY128R4GN	12.0 ± 10%	0-8.4A	83%
HY244R2GN	24.0 ± 10%	0-4.2A	85%

www.DataSheet4U.com

DataShe

1 - 8 0 0 - 6 3 4 - 3 6 5 4


100 Watt HY Series



MECHANICAL SPECIFICATIONS

Size (W x D x H) 7.1 x 3.6 x 1.2 inches (180 x 93 x 31 mm)

Weight 1.5 lb (0.7 kg)

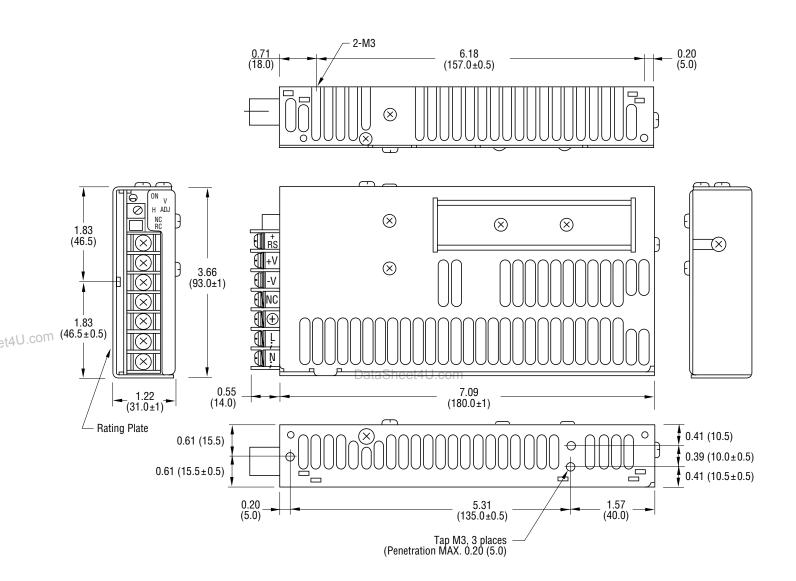

Dimensions in inches; () Dimensions in mm.

CONNECTOR DESIGNATIONS

	CN1-1	AC Neutral
,	CN1-2	AC Line
	CN1-3	Frame Ground
	CN1-4	-RS
	CN1-5	-V
D 1 01	CN2-6	+V
DataShee	CN2-7	+RS

www.DataSheet4U.com