

1135 SERIES


Operating Voltage= 100 Vdc


OperatingCurrentMax= 1,2,3,5 & 10amps


Operating Frequency= DC


Temperature Range= -20 to 50oC

DieWithstand(Line to Case)= 1500Vdc












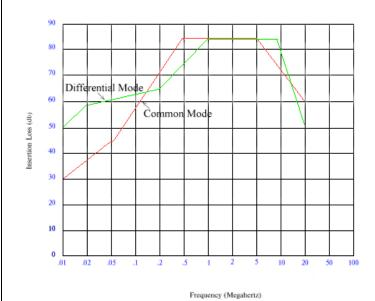

The 1135 Series is designed to provide filtering for DC systems operating in very noisy environments. This filter series will attenuate RF noise from switching power supplies as well as transient noise from relays and other switching devices.

JMK P/N Ordering Information		
Current Rating	Terminals	

Current Rating	Terminals	JMK Part Number
1	.250 Faston Tabs	AA-1135-1
	Flying Leads	FF-1135-1
2	.250 Faston Tabs	AA-1135-2
	Flying Leads	FF-1135-2
3	.250 Faston Tabs	AA-1135-3
	Flying Leads	FF-1135-3
5	.250 Faston Tabs	AA-1135-5
	Flying Leads	FF-1135-5
10	.250 Faston Tabs	AA-1135-10
	Flying Leads	FF-1135-10

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115 email: info@jmkfilters.com

EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884