U905 Catalog Section

A note from IDEC:

Due to continuous product improvements, specifications are subject to change without notice.

For up-to-date information, or to request a full copy of this catalog, please visit us at www.idec.com





LT1 Series — SignaLightTM Light Towers

Display Lights with a Tower of Advantages


Key features of the LT1 series SignaLight towers include:

- · Custom configurations meet your specifications simply
- Select your flash preference, lens colors, number of tiers, mounting style, and voltage
- Choice of LED or incandescent lamps

LED lamps provide over 100,000 hours of service life and are interchangeable with incandescent bulbs

Incandescent lamps (available up to 10 watts) are vibrationresistant and provide a 2,000 hour service life

- Replace the bulbs independently; no need to disassemble the entire unit
- · Heat- and shock-resistant polycarbonate lenses
- · Flashing models allow each lamp to be flashed or steady
- · Choice of metallic base or cost-saving plastic base
- · Color-coded wires make assembly and wiring easy
- · Mounting options include base and pole mount












Selection Guides

LT1 Series — LED or Incandescent Light Towers

	LT1A	LT1D	LT1H	LT1K	
Page	B-4				
Description	Incand	Incandescent		LED	
Description	Steady	Flashing	Steady	Flashing	
Features	Select your flash preference, lens colors, base, number of tiers, mounting style, and voltage Replace the bulbs independently; there is no need to disassemble the entire unit Heat- and shock-resistant polycarbonate lenses Choice of metallic base or cost-saving plastic base Color-coded wires make assembly and wiring easy				
Nominal Voltage	12V AC/DC, 24V AC/DC, 120V AC, 240V AC (incandescent only)				
Lamp Style	T20 glass bulb, BA15D lamp base BA15D lamp base		amp base		
Lens Colors	Red, Yellow, Green, Blue, White				
Degree of Protection	IP20 (for indoor use only)				
Mounting	Base mount (three stud) Pole mount (horizontal or vertical surface) NPT mount (via adaptor) to 1/2" or 3/4" NPT conduit; install in an upright position				
Optional Pole Height	10.75" (273mm)				
Lens Diameter	2.20" (56mm)				
Ratings/Approvals	UL Listed File No. E70646 C C-UL Listed File No. E70646 (equivalent to CSA)				

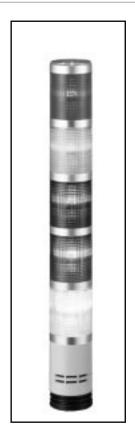


idec Display Lights

LT1A: Incandescent, Non-Flashing LT1D: Incandescent, Flashing/Non-Flashing LT1H: LED, Non-Flashing LT1K: LED, Flashing/Non-Flashing 24V AC/DC ±10% **Nominal Voltage** 12V AC/DC ±10% 120V AC ±10% 240V AC ±10% **Internal Fuse Rating** 3.15A 3.15A 1A 1A LED 12V AC/DC 24V AC/DC 120V AC N/A Lamp Rating Incandescent 12V. 5W 30V. 10W 120V. 7W 240V. 10W Yellow White Blue Red Green Current 78mA 12VDC 54mA 54mA 54mA 78mA LED N/A Required 24VDC 54mA 39mA 54mA 54mA 39mA per Lamp 120VAC 30mA 30mA 30mA 30mA 30mA Incandescent 0.4A ±10% 0.3A ±10% 0.06A ±10% 0.05A ±10% **External Contact Capacity** 5A 2A 1A In-Rush LED Not applicable Current Below 4.0A Below 3.0A Below 0.5A Incandescent Below 0.6A per Lamp LED BA15D lamp base Lamp Style Incandescent T20 glass bulb, BA15D lamp base LFD 100,000 hours (minimum) Lamp Life-Span Incandescent 2,000 hours (average) **Lens Colors** Red, Yellow, Green, Blue, White Lens Diameter 2.20" (56mm) **Maximum Tiers** 5 Degree of Protection IP20 (for indoor use only), NEMA1 LED: 45/minute ±10% (LT1K only) Incandescent: 80/minute ±10% (LT1D only) Flash Rate **Insulation Resistance** More than $3M\Omega$ by a DC 500V megger Voltage Resistance 1,500V AC for 1 minute **Operating Range** -30 to +40°C (LT1A), -10 to +40°C (LT1D), 15 to 90% relative humidity **Vibration Resistance** 2.2G maximum Base mount (three stud) Pole mount (horizontal or vertical surface)
NPT mount (via adaptor) to 1/2" or 3/4" NPT conduit Mounting Install in an upright position **Optional Pole Height** 10.75" (273mm) **Approvals UL Listed** c-UL Listed File No. E70646 File No. E70646 (equivalent to CSA) Non-flashing (steady): 20 AWG Wire Size Flashing: 18 AWG and 20 AWG



SignaLight™ Part Numbers (assembled)

Part Number Guide




To determine the appropriate SignaLight part number, use these numbered boxes in conjunction with the codes in the *Part Numbers:* Assembled Parts table below.

 \mathbf{B}

Part Numbers: Assembled Parts

Box No.	Γ	Code	
1)		Non-flashing (steady), incandescent lamp	Α
	Light source and function	Flashing/non-flashing, incandescent lamp	D
		Non-flashing (steady), LED lamp	Н
		Flashing/non-flashing, LED lamp	K
2	Number of tiers	Maximum of 5 tiers	1-5
3	Voltage	12V AC/DC	1
		24V AC/DC	2
		120V AC	5
		240V AC (incandescent only)	8
4	Mounting style and base designation	Base mount, plastic base	1
		Base mount, metallic base	2
		Pole mount, plastic base	3
		Pole mount, metallic base	4
\$ - 9	Color code	Red	R
		Yellow	Υ
		Green	G
		Blue	S
		White	W

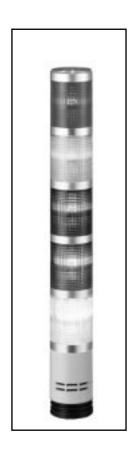



Specify lens color code from the lowest to the highest tier.

Examples: Assembled Parts

Examples: Assembled Parts			
Part No.	Description		
LT1A-354-RRR	Non-flashing incandescent, 3 tiers, 120V AC, pole-mount, metallic base, all Red lenses		
LT1D-182-S	Flashing/non-flashing incandescent, 1 tier, 240V AC, basemount, metallic base, Blue lens		
LT1D-221-RS	Flashing/non-flashing incandescent, 2 tier, 24V AC/DC, base-mount, plastic base, Red and Blue lenses		
LT1H-412-RGYW	Non-flashing LED, 4 tier, 12V AC/DC, base-mount, metallic base, Red, Green, Yellow, and White lenses		
LT1K-554-GSRGR	Flashing/non-flashing LED, 5 tier, 120V AC, pole-mount, metallic base, Green, Blue, Red, Green, and Red lenses		



SignaLight™ Part Numbers (sub-assembled)

Part Numbers: Sub-Assemblies

Description	Part No.	Notes	Examples
Flashing/non-flashing (steady) light body frame	LT1A-01#*\$	# = Number of tiers (1–5) * = Lamp voltage	LT1A-0142M = Steady light, four tiers, 24V AC/DC, metallic base
Flashing light body frame	LT1D-01#*\$	(2 = 24V AC/DC, 5 = 120V AC, 8 = 240V AC) \$ = Body cover (M = metallic, P = plastic)	LT1D-0125P = Flashing light, two tiers, 120V AC, plastic base
Lens	LT1X-08*	* = Color: R = Red, Y = Yellow, G = Green, S = Blue, W = White	LT1X-08G = Green lens
12V AC/DC LED lamp	LTXD-1*		LTXD-1R = Red LED, 12V AC/DC
24V AC/DC LED lamp	LTXD-2*	* = Color: R = Red, Y = Yellow, G = Green, S = Blue, W = White	LTXD-2S = Blue LED, 24V AC/DC
120V AC LED lamp	LTXD-120*		LTXD-120Y = Yellow LED, 120VAC
12V AC/DC	B5-2		
30V AC/DC incandescent lamp	B5-31		
120V AC incandescent lamp	B5-1		
240V AC incandescent lamp	B5-4		
Mounting pole (optional)	LT1Z-10		



 ${\it 1. Part numbers for LED and incandescent bases are identical.}$

Examples: Sub-Assemblies

Complete Part No.	Quantity	Sub-Assembly Part No.	Description
LT1A-354-RRR	1	LT1A-0135P	Steady, 3 tier, 120V AC, plastic base
	3	LT1X-08R	Lenses: all Red
	1	LT1X-06	Тор сар
	3	B5-1	120V AC incandescent lamps
	1	LT1Z-10	Pole unit
LT1D-182-S	1	LT1D-0118M	Flashing, 1 tier, 240V AC, metallic base
	1	LT1X-08S	Lens: Blue
	1	LT1X-06	Тор сар
	1	B5-31	240V AC incandescent lamp
LT1K-221-RS	1	LT1D-0122P	Flashing, 1 tier, 24V AC/DC, plastic base
	2	LT1X-08R,S	Lenses: Red and Blue
	1	LT1X-06	Тор сар
	1	LTXD-2R	24V AC/DC LED lamp, Red
	1	LTXD-2S	24V AC/DC LED lamp, Blue



2. The Assembled Parts Table is on page B-6 .

Sub-Components

Description	Quantity	
Body frame	Required: 1 per unit	
Lens(es)	Variable: from 1 – 5	
Тор сар	Required: 1 per unit	
Lamps	Variable: from 1 – 5	
Mounting pole	Optional: 1 per unit	

SignaLight[™] Accessories

Part Numbers: Accessories/Replacement Parts


Description	Part No.	Remarks
LED Lamp	LTXD-1*	12V AC/DC See below for available colors
E II	LTXD-2*	24V AC/DC See below for available colors
	LTXD-120*	120V AC See below for available colors
Incandescent Lamp	B5-2	12V AC/DC, 5W
	B5-31	30V, 10W (for use with 24V AC/DC)
4	B5-1	120V AC, 7W
1	B5-4	240V AC, 10W
Lens	LT1X-08*	See below for available colors
Top Cover		
	LT1X-06	Clear polycarbonate
Mounting Pole		
	LT1Z-10	Chrome-plated steel supplied with "L" bracket and two M22 x 1.5 hexagonal nuts
Pole Mounting Fixture		
	LT1Z-11	Aluminum fixture for mounting pole-mounted units to horizontal surface; not included with assembled SignaLight units
NPT Pole Adaptors	LT1Z-NPT50	1/2" NPT pole adaptor; not included with assembled SignaLight units
	LT1Z-NPT75	3/4" NPT pole adaptor; not included with assembled SignaLight units



^{*} LED and lens colors: R = Red, G = Green, Y = Yellow, W = White, and S = Blue.




SignaLight™ Wiring

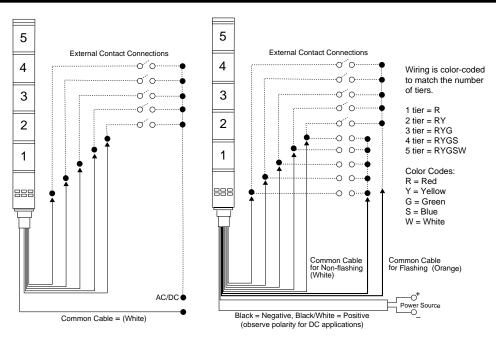


LT1A/LT1H: Non-Flash Series


LT1D/LT1K: Flash/Non-Flash Series

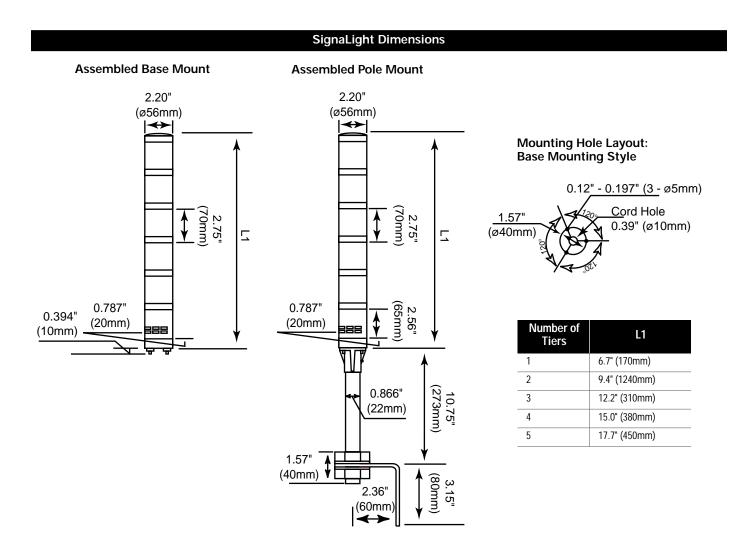


SignaLight Dimensions, continued

Adapter

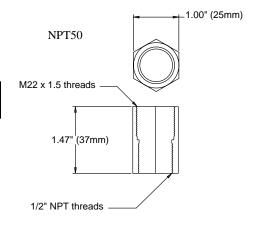





Optional Pole Mounting Base: Side View



Optional Pole Mounting Base: Bottom View

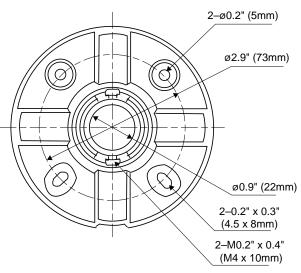

Mounting Bracket (provided with mounting pole)



Mounting Pole

