## **ULTRA LOW CAPACITANCE TVS ARRAY**



### **DESCRIPTION**

The PAM02SD23xxC Series are ultra low capacitance transient voltage suppressor arrayd, designed to protect automotive applications. The devices are available in a bidirectional configuration and is rated at 350 Watts for an  $8/20\mu s$  waveshape.

The PAM02SD23xxC Series meets IEC 61000-4-2 (ESD) and IEC 61000-4-4 (EFT) requirements. At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. The devices offer anultra low capacitance and low leakage current in a miniature SOD-323 package.

#### **FEATURES**

- Compatible with IEC 61000-4-2 (ESD): Air 15kV, Contact 8kV
   Exceeds Level 4: Handles 10kV Contact & 25kV Air Discharge
- Compatible with IEC 61000-4-4 (EFT): 40A 5/50ns
- Compatible with IEC 61000-4-5 (Surge)
- 350 Watts Peak Pulse Power per Line (tp = 8/20µs)
- · Replacement for MLV (0805)
- Bidirectional Configuration
- Protects One Power or I/O Port
- Available in 8V & 12V
- ESD Protection > 25kV
- Low Clamping Voltage
- Ultra Low Capacitance: 3pF (Typical)
- RoHS Compliant
- REACH Compliant


# **MECHANICAL CHARACTERISTICS**

- Molded JEDEC SOD-323 Package
- Approximate Weight: 5 milligrams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
  - Pure-Tin Sn, 100: 260-270°C
- 8mm Tape and Reel Per EIA Standard 481
  Flammability Rating UL 94V-0

### **APPLICATIONS**

• Automotive Applications

# PIN CONFIGURATION






# **TYPICAL DEVICE CHARACTERISTICS**


MAXIMUM RATINGS @ 25°C Unless Otherwise Specified								
PARAMETER SYMBOL VALUE UNITS								
Peak Pulse Power (tp = 8/20μs) - See Figure 1	P <sub>pp</sub>	350	Watts					
Operating Temperature	T <sub>A</sub>	-55 to 150	°C					
Storage Temperature	T <sub>stg</sub>	-55 to 150	°C					

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified								
PART NUMBER	DEVICE MARKING	RATED STAND-OFF VOLTAGE	MINIMUM BREAKDOWN VOLTAGE	MAXIMUM CLAMPING VOLTAGE (Fig. 2)	MAXIMUM LEAKAGE CURRENT	TYPICAL CAPACITANCE		
		V <sub>WM</sub> VOLTS	@ 1mA V <sub>(BR)</sub> VOLTS	@ IP = 1A V <sub>c</sub> VOLTS	@V <sub>wм</sub> Ι <sub>D</sub> μΑ	@0V, 1MHz C pF		
PAM02SD2308C	8C	8.0	8.5	13.4	2	3		
PAM02SD2312C	2C	12.0	13.3	19.0	1	3		

05346.R1 9/12 Page 2 <u>www.protekdevices.com</u>

# **TYPICAL DEVICE CHARACTERISTICS**

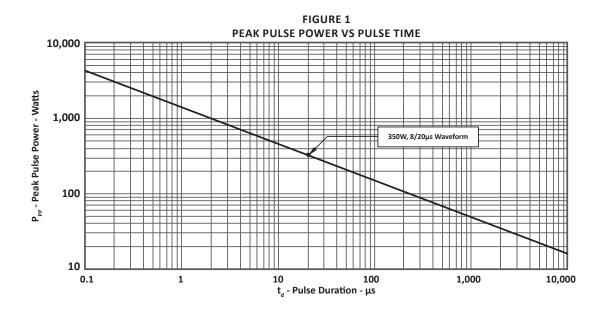

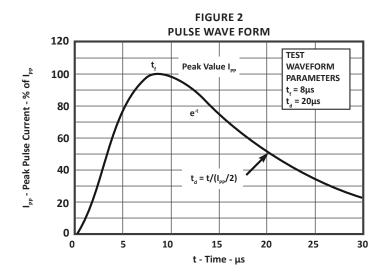

05346.R1 9/12 Page 3 <u>www.protekdevices.com</u>





# **SOD-323 PACKAGE INFORMATION**


OUTLINE DIMENSIONS								
DIM	MILLIN	IETERS	INCHES					
	MIN	MAX	MIN	MAX				
А	1.60	1.90	0.063	0.075				
В	1.15	1.45	0.045	0.057				
С	2.39	2.70	0.094	0.106				
D	0.80	1.10	0.031	0.043				
E	0.25	0.40	0.010	0.016				
F	0.10	0.20	0.004	0.008				
Н	-	0.10	-	0.004				
L	0.20	-	0.008	-				

## NOTES

- 1. Controlling dimension: millimeters.
- 2. Dimensioning and tolerances per ANSI Y14.5M, 1985.
- 3. Dimensions are exclusive of mold flash and metal burrs.









PAD LAYOUT DIMENSIONS							
DINA	MILLIM	IETERS	INCHES				
DIM	MIN MAX		MIN MAX				
Α	2.87	3.12	0.113	0.123			
В	0.66	0.91	0.026	0.036			
С	0.66	0.91	0.026	0.036			

### NOTES

1. Controlling dimension: millimeters.

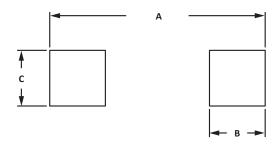

# **TAPE AND REEL**

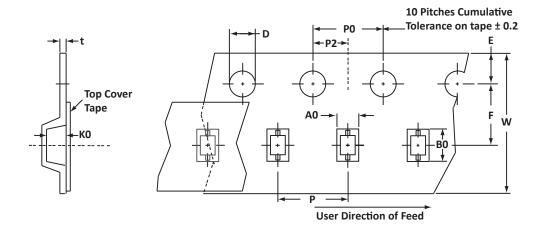

SPECIFICATIONS												
REEL DIA.	TAPE WIDTH	A0	В0	КО	D	E	F	W	P0	P2	Р	tmax
178mm (7")	8mm	1.55 ± 0.10	2.90 ± 0.10	1.35 ± 0.10	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25

### NOTES

- 1. Dimensions are in millimeters.
- 2. Surface mount product is taped and reeled in accordance with EIA-481.
- 3. Suffix T7 = 7" Reel 3,000 pieces per 8mm tape.
- 4. Marking on Part marking code (see page 2).

Package outline, pad layout and tape specifications per document number 06010.R4 9/10.

ORDERING INFORMATION								
BASE PART NUMBER (xx = Voltage)	I LEADEREE SUEEIX I TAPE SUEEIX I OTY/REEL I REEL SIZE I TURE OTY							
PAM02SD23xxC n/a -T7 3,000 7" n/a								
This device is only available in a Lead-Free configuration.								

## **COMPANY INFORMATION**

#### **COMPANY PROFILE**

In business more than 20 years, ProTek Devices™ is a privately-held company located in Tempe, Arizona, that offers a product line of transient voltage suppressors (TVS); avalanche breakdown diodes; steering diode TVS arrays and other surge suppressor component products. These TVS devices protect electronic systems from the effects of lightning, electrostatic discharge (ESD), nuclear electromagnetic pulses (NEMP), inductive switching and EMI / RFI. ProTek Devices also offers high performance interface and linear products that include analog switches; multiplexers; LED drivers; audio control ICs; RF and related high frequency products. The analog devices work in a host of consumer; industrial; automotive and other applications.

### **CONTACT US**

### **Corporate Headquarters**

2929 South Fair Lane Tempe, Arizona 85282 USA

### By Telephone

General: 602-431-8101

Sales: & Marketing: 602-414-5109 Customer Service: 602-414-5114

Product Technical Support: 602-414-5107

#### By Fax

General: 602-431-2288

### By E-mail:

Sales: sales@protekdevices.com

Customer Service: <a href="mailto:service@protekdevices.com">service@protekdevices.com</a>
Technical Support: <a href="mailto:support@protekdevices.com">support@protekdevices.com</a>

### ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19

Zervex

Singapore - 408538 Tel: +65-67488312 Fax: +65-67488313

#### Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2011 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.