

## **ELECTRICAL SPECIFICATIONS:**

NDT 1.0 CDI

1.0 TURNS RATIO: (P4-P5-P6) : (J3-J6) (P3-P2-P1) : (J1-J2)

: 1CT : 1CT± 3% : 1CT : 1CT ± 3%

(P6-P4) (P3-P1) 2.0 INDUCTANCE:

: 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias : 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias

: 0.3 MAX. @ 1MHz 3.0 LEAKAGE INDUCTANCE: P6-P5-P4 (WITH J6 AND J3 SHORT) P3-P2-P1 (WITH J2 AND J1 SHORT) : 0.3 MAX. @ 1MHz

4.0 INTERWINDING CAPACITANCE: (P6,P5,P4) TO (J6,J3) (P3,P2,P1) TO (J2,J1) : 30pf MAX @ 1MHz : 30pf MAX. @ 1MHZ

5.0 DC RESISTANCE: (J6-J3)=(J2-J1)

: 1.2 ohms Max.

Bel Stewart ( 11118 Susquehanna Glen Rock, Pa 1732 717.234.7512

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

SHEET 1 OF 4

**RECEIVE** 

6.0 RETURN LOSS: (P6-P4)=100 OHMS AND (P1-P3)=100 OHM REF.

: 16dB MIN. : 12dB MIN. 1MHz TO 30MHz 30MHz TO 80MHz

NOTE: 100 OHMS CONNECTED TO (J2-J1) OR (J6-J3).

7.0 DIELECTRIC WITHSTAND: (J1, J2) TO (P1, P3) (J3, J6) TO (P4,P6) : 1500 VAC

: 1500 VAC

8.0 INSERTION LOSS: RS=RL=100 ohms

100KHz TO 100MHz : 1.1 dB TYP

9.0 RISE TIME: RS=100 OHMS AND RL = 100 OHMS

OUTPUT VOLTAGE = 1 V peak : 3.0 nS MAX PULSE WIDTH= 112nS : 3.0 nS MAX


10.0 CROSS TALK: 1-100 MHz : 30 dB TYP


11.0 COMMON TO COMMON MODE ATTENUATION: 1MHz TO 100MHz : 35dB TYP

Bel Stewart ( 11118 Susquehanna Glen Rock, Pa 1732 717.234.7512

| STANDARD LED | WAVELEN |
|--------------|---------|
| YELLOW       | 590 r   |
| GREEN        | 565 r   |

\* WITH A FORWARD CUR



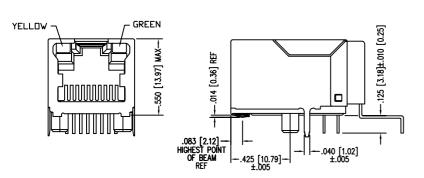

## NOTES:

- TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS
- DIMENSIONS SHOWN WITH "\*" TO BE CENTRAL ABOUT CENTER LINE
- DIMENSIONS SHOWN ARE SUBJECT TO CHANGE WITHOUT NOTICE.
- PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED. SEE ELECTRICAL DRAWING FOR OMITTED PINS.
- STANDARD 50 MICRO-INCH SELECTIVE GOLD PLATING
- HIGH TEMPERATURE REFLOW COMPATABLE 230°C/90 SEC MAX.
- ALL POLYMERS FLAMMABILITY UL94V0 CT750006

\*.456 [11.58]

\*.456 [11.58]

\*.040 [1.02] (4)(LED)

\*.062 [1.57] (2)

(Shield)

\*.450 [11.43]


\*.450 [11.43]

P.C.B. RECOMMENDED HOLE SEEN FROM COMPONEN TOLERANCE ±.003 [0.08] UNLESS O


> Bel Stewart ( 11118 Susquehanna Glen Rock, Pa 1732 717.234.7512


SHEET 3 OF 4

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

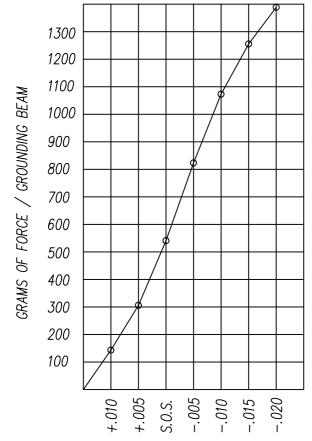

PANEL GROUNDING BEAM DEFLECTION S.O.S. = SUGGESTED OPENING SIZE

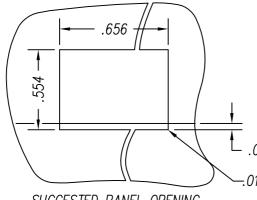



THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE THE USER THE ABILITY TO HAVE REASONABLE JACK / PANEL CLEARANCES YET MAINTAIN RELIABLE GROUNDING THESE VARIABLES CAN BE CAPABILITY. ADJUSTED IN EITHER DIRECTION BUT MAY CARRY SOME CONSEQUENCES IN THE FORM OF LOWER MATING FORCES OR TIGHTER ASSEMBLY TOLERANCES. FORCE VALUES ON THE GRAPH ARE GENERAL AVERAGES TAKEN AT THE POINT OF CONTACT SHOWN ABOVE. THE SUGGESTED PANEL OPENING INCLUDES APPROXIMATELY .020 CLEARANCE ON THE SIDES AND TOP AND .013 ON THE BOTTOM, AT PANEL OPENING.

.000 (TOP OF PCB TO BOTTOM OF OPENING)

-.010 MAX. RADIUS(4)

CT720034X1/24-001302

SUGGESTED PANEL OPENING

Bel Stewart ( 11118 Susquehanna Glen Rock, Pa 1732 717.234.7512

4 OF 4

SHEET

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.