# **1SS119**

# Silicon Epitaxial Planar Diode for High Speed Switching

# **HITACHI**

ADE-208-180B (Z)

Rev.2 Sep. 2000


#### **Features**

- Low capacitance. (C = 3.0 pF max)
- Short reverse recovery time.  $(t_{rr} = 3.5 \text{ ns max})$
- Small glass package (MHD) enables easy mounting and high reliability.

### **Ordering Information**

Type No.	Cathode band	Package Code
1SS119	Light Blue	MHD

#### **Outline**

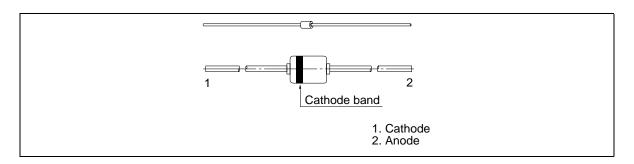



### **1SS119**

### **Absolute Maximum Ratings**

 $(Ta = 25^{\circ}C)$ 

Item	Symbol	Value	Unit	
Peak reverse voltage	$V_{_{RM}}$	35	V	
Reverse voltage	V <sub>R</sub>	30	V	_
Average rectified current	I <sub>o</sub>	150	mA	_
Peak forward current	I <sub>FM</sub>	450	mA	_
Non-Repetitive peak forward surge current	I <sub>FSM</sub> *	1	А	
Power dissipation	Pd	250	mW	
Junction temperature	Tj	175	°C	_
Storage temperature	Tstg	-65 to +175	°C	_


Note: Within 1s forward surge current.

#### **Electrical Characteristics**


 $(Ta = 25^{\circ}C)$ 

Item	Symbol	Min	Тур	Max	Unit	Test Condition
Forward voltage	$V_{_{\rm F}}$	_	_	0.8	V	I <sub>F</sub> = 10 mA
Reverse current	I <sub>R</sub>	_	_	0.1	μΑ	V <sub>R</sub> = 30 V
Capacitance	С	_	_	3.0	pF	V <sub>R</sub> = 1 V, f = 1 MHz
Reverse recovery time	t <sub>rr</sub> *	_	_	3.5	ns	$I_{F} = 10 \text{ mA}, V_{R} = 6 \text{ V}, R_{L} = 50 \Omega$

Note: Reverse recovery time test circuit




#### **Main Characteristic**

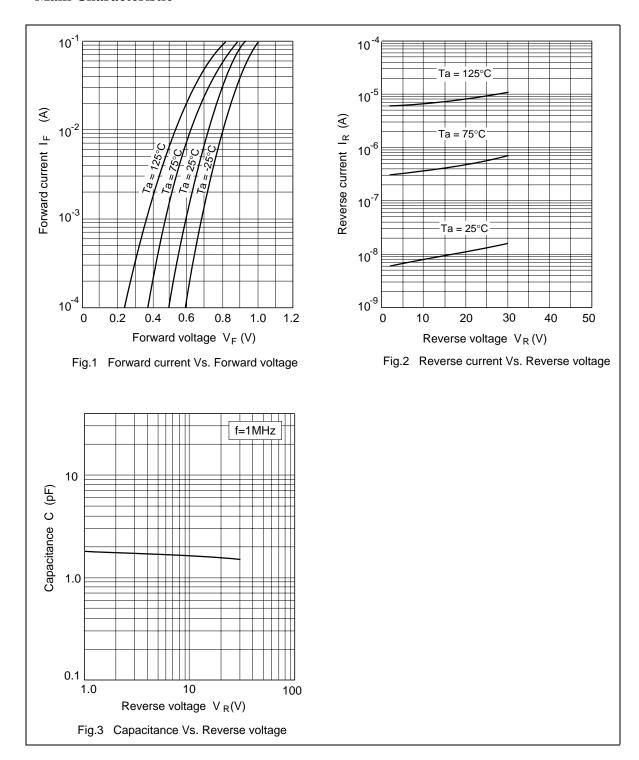

## <u>1SS1</u>19

## **Package Dimensions**

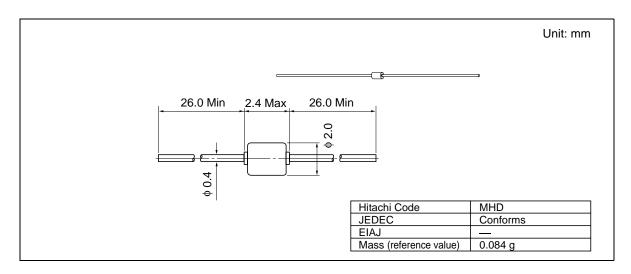

#### **Disclaimer**

- 1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
- 2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
- 3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
- 4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
- 5. This product is not designed to be radiation resistant.
- 6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
- 7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

#### Sales Offices

# HITACHI

#### Hitachi, Ltd.

Semiconductor & Integrated Circuits Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan Tel: (03) 3270-2111 Fax: (03) 3270-5109

URL

NorthAmerica : http://semiconductor.hitachi.com/
Europe : http://www.hitachi-eu.com/hel/ecg
Asia : http://sicapac.hitachi-asia.com
Japan : http://www.hitachi.co.jp/Sicd/indx.htm

#### For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive San Jose,CA 95134 Tel: <1> (408) 433-1990 Fax: <1>(408) 433-0223

Hitachi Europe Ltd.
Electronic Components Group
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire SL6 8YA, United Kingdom
Tel: <44> (1628) 585000
Fax: <44> (1628) 585200

Hitachi Europe GmbH Electronic Components Group Dornacher Straße 3 D-85622 Feldkirchen, Munich Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00 Hitachi Asia Ltd.
Hitachi Tower
16 Collyer Quay #20-00
Singapore 049318
Tel: <65>-538-6533/538-8577
Fax: <65>-538-6933/538-3877
URL: http://www.hitachi.com.sg

Hitachi Asia Ltd. (Taipei Branch Office) 4/F, No. 167, Tun Hwa North Road Hung-Kuo Building Taipei (105), Taiwan Tal: ~886-(2),2718,3666

Talper (105), Talwan Tel: <886>-(2)-2718-3666 Fax: <886>-(2)-2718-8180 Telex: 23222 HAS-TP URL: http://www.hitachi.com.tw Group III (Electronic Components)
7/F., North Tower
World Finance Centre,
Harbour City, Canton Road
Tsim Sha Tsui, Kowloon
Hong Kong
Tel: <852>-(2)-735-9218

Hitachi Asia (Hong Kong) Ltd.

Fax: <852>-(2)-730-0281 URL: http://semiconductor.hitachi.com.hk

JRL: http://semiconductor.nitacni.com.nk

Copyright © Hitachi, Ltd., 2001. All rights reserved. Printed in Japan.