Plug-In **RF Transformer**

50Ω

10 to 250 MHz

Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	2W
DC Current	30mA
Permanent demage may ecour if any	of those limits are exceeded

Pin Connections

1 2 3 3

MCL

6 5 4 4

в

.27

J

.04

1.02

С

 \cap

PRI

6.86

Α

.30

н

.05

1.27

7.62

NDEX

PRIMARY DOT	4
PRIMARY	6
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	_
NOT USED	2,5

Outline Drawing

Outline Dimensions (inch)

D

L

.300

7.62

Config. C

•

.010

0.25

С

.23

Κ

.11

2.79

5.84

- 0

G

.100

2.54

wt

grams

0.50

F

.020

0

SEC

 \cap

NOTE: PIN NUMBERS DO NOT APPEAR ON UNIT, FOR REFERENCE ONLY. INDEX MARK INDICATES PIN 6.

Е

Μ

.35

8.89

.042

Features

- wideband, 10 to 250 MHz
- good return loss
- also available with flat-pack (W38) & surface mount gull-wing (KK81) leads

Applications

- HF/VHF
- receivers/transmitters
- impedance matching

T4-1-2W-X65+ T4-1-2W-X65



CASE STYLE: X65 PRICE: \$5.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Transformer Electrical Specifications					
Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION LOSS*			
		3 dB MHz	2 dB MHz	1 dB MHz	
4	10-250	_	_	10-250	

*Insertion Loss is referenced to mid-band loss. 0.3 dB tvp.

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	
10.00	0.27	25.21	
46.00	0.26	29.62	
82.00	0.27	27.41	
110.00	0.28	24.75	
131.00	0.30	22.67	
148.00	0.31	21.04	
168.00	0.32	19.23	
194.00	0.33	17.07	
229.00	0.37	14.47	
250.00	0.42	13.08	

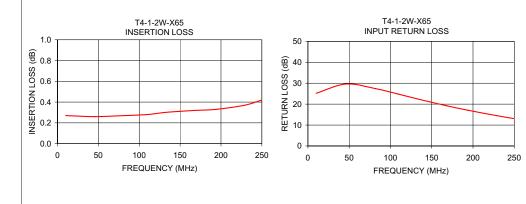



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engine Travel Provides ACTUAL Data Instantly at minicipality of the Design Engineers Search Engineers

REV. A M98898 T4-1-2W-X65 IG/TD/CF 070802

IF/RF MICROWAVE COMPONENTS Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established tests performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's and terms and conditions (collective), "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and performance data www.minicircuits.com/MCLStore/terms.jsp.