

April 2000

FQD4N50 / FQU4N50

500V N-Channel MOSFET

General Description

These N-Channel enhancement mode power field effect transistors are produced using Fairchild's proprietary, planar stripe, DMOS technology.

This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency switch mode power supply, power factor correction, electronic lamp ballast based on half bridge.

Features

- 2.6A, 500V, $R_{DS(on)}$ = 2.7 Ω @V_{GS} = 10 V Low gate charge (typical 10 nC)
- Low Crss (typical 6.0 pF)
- Fast switching
- 100% avalanche tested
- · Improved dv/dt capability



Absolute Maximum Ratings T_C = 25°C unless otherwise noted

Symbol	Parameter		FQD4N50 / FQU4N50	Units
V _{DSS}	Drain-Source Voltage		500	V
I _D	Drain Current - Continuous (T _C = 25°C)		2.6	Α
	- Continuous (T _C = 100°C)		1.64	Α
I _{DM}	Drain Current - Pulsed	(Note 1)	10.4	Α
V _{GSS}	Gate-Source Voltage		± 30	V
E _{AS}	Single Pulsed Avalanche Energy	(Note 2)	260	mJ
I _{AR}	Avalanche Current	(Note 1)	2.6	Α
E _{AR}	Repetitive Avalanche Energy	(Note 1)	4.5	mJ
dv/dt	Peak Diode Recovery dv/dt	(Note 3)	4.5	V/ns
P_{D}	Power Dissipation (T _A = 25°C) *		2.5	W
	Power Dissipation (T _C = 25°C)		45	W
	- Derate above 25°C		0.36	W/°C
T _J , T _{STG}	Operating and Storage Temperature Range		-55 to +150	°C
T _L	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds		300	°C

Thermal Characteristics

Symbol	Parameter	Тур	Max	Units
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case		2.78	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient *		50	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient		110	°C/W

^{*} When mounted on the minimum pad size recommended (PCB Mount)

Symbol	Parameter	Test Conditions	3	Min	Тур	Max	Units
Off Cha	aracteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$		500			V
ΔBV _{DSS} / ΔT _J	Breakdown Voltage Temperature Coefficient	I _D = 250 μA, Referenced	to 25°C		0.38		V/°C
I _{DSS}	Zana Cata Valtana Dusia Comment	V _{DS} = 500 V, V _{GS} = 0 V				1	μΑ
	Zero Gate Voltage Drain Current	V _{DS} = 400 V, T _C = 125°C	;			10	μΑ
I _{GSSF}	Gate-Body Leakage Current, Forward	V _{GS} = 30 V, V _{DS} = 0 V				100	nA
I _{GSSR}	Gate-Body Leakage Current, Reverse	$V_{GS} = -30 \text{ V}, V_{DS} = 0 \text{ V}$				-100	nA
On Cha	racteristics						
V _{GS(th)}	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_{D} = 250 \mu A$		3.0		5.0	V
R _{DS(on)}	Static Drain-Source On-Resistance	V _{GS} = 10 V, I _D = 1.3 A			2.0	2.7	Ω
9 _{FS}	Forward Transconductance	$V_{DS} = 50 \text{ V}, I_{D} = 1.3 \text{ A}$	(Note 4)		2.6		S
C _{oss}	Output Capacitance Reverse Transfer Capacitance	f = 1.0 MHz			55 6	70 8	pF pF
C _{rss}		f = 1.0 MHz					
Switchi	ing Characteristics						
$t_{d(on)}$	Turn-On Delay Time	V _{DD} = 250 V, I _D = 3.4 A,			12	30	ns
t _r	Turn-On Rise Time	$R_G = 25 \Omega$			45	100	ns
$t_{d(off)}$	Turn-Off Delay Time	G			20	50	ns
t_f	Turn-Off Fall Time		(Note 4, 5)		30	70	ns
Q_g	Total Gate Charge	$V_{DS} = 400 \text{ V}, I_{D} = 3.4 \text{ A},$			10	13	nC
Q_{gs}	Gate-Source Charge	V _{GS} = 10 V			2.5		nC
Q_{gd}	Gate-Drain Charge		(Note 4, 5)		4.7		nC
		ad Massinasson Datinas	s				
Drain-S	Source Diode Characteristics ar	na waximum Kating	_				
Drain-S	Source Diode Characteristics as Maximum Continuous Drain-Source Dio					2.6	Α
	i e e e e e e e e e e e e e e e e e e e	ode Forward Current				2.6 10.4	A A
Is	Maximum Continuous Drain-Source Dic	ode Forward Current					
I _S	Maximum Continuous Drain-Source Did Maximum Pulsed Drain-Source Diode F	ode Forward Current Forward Current				10.4	Α

- $\label{eq:Notes:1} \begin{tabular}{ll} \textbf{Notes:} \\ 1. & \textbf{Repetitive Rating: Pulse width limited by maximum junction temperature} \\ 2. & \textbf{L} = 68mH, \textbf{I}_{AS} = 2.6A, \textbf{V}_{DD} = 50V, \textbf{R}_{G} = 25~\Omega, \textbf{Starting T}_{J} = 25^{\circ}\text{C} \\ 3. & \textbf{I}_{SD} \leq 3.4A, & \text{di/dt} \leq 200\text{A/us, V}_{DD} \leq \text{BV}_{DSS}, \text{Starting T}_{J} = 25^{\circ}\text{C} \\ 4. & \textbf{Pulse Test: Pulse width} \leq 300\mu\text{s, Duty cycle} \leq 2\% \\ 5. & \textbf{Essentially independent of operating temperature} \\ \end{tabular}$

Typical Characteristics




Figure 1. On-Region Characteristics




Figure 2. Transfer Characteristics




Figure 3. On-Resistance Variation vs. Drain Current and Gate Voltage




Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature




Figure 5. Capacitance Characteristics






Figure 6. Gate Charge Characteristics









Figure 7. Breakdown Voltage Variation vs. Temperature

Figure 8. On-Resistance Variation vs. Temperature






Figure 9. Maximum Safe Operating Area

Figure 10. Maximum Drain Current vs. Case Temperature


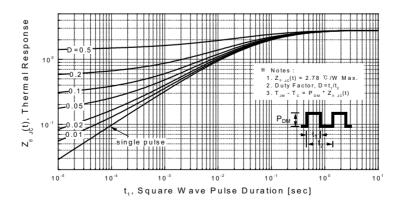



Figure 11. Transient Thermal Response Curve

©2000 Fairchild Semiconductor International Rev. A, April 2000


Gate Charge Test Circuit & Waveform

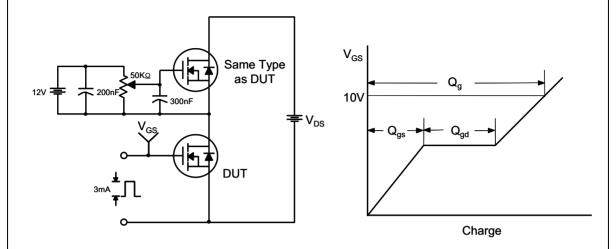


Resistive Switching Test Circuit & Waveforms

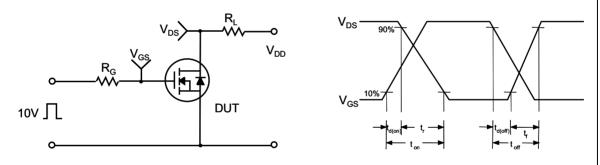



Unclamped Inductive Switching Test Circuit & Waveforms

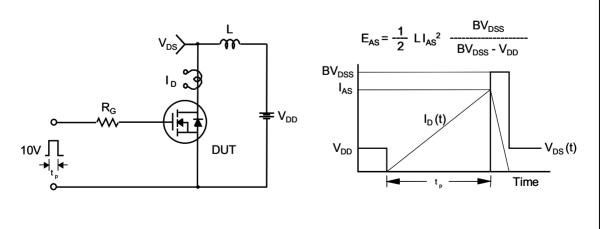


Peak Diode Recovery dv/dt Test Circuit & Waveforms

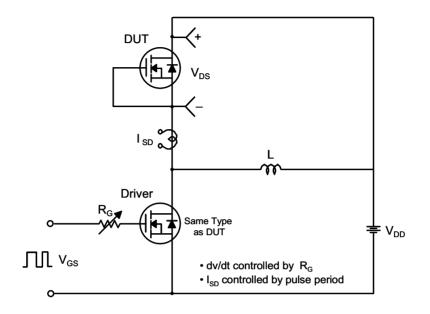






Body Diode Reverse Current

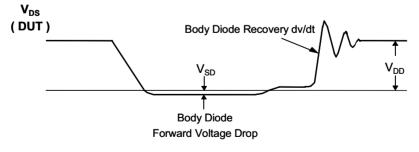



©2000 Fairchild Semiconductor International Rev. A, April 2000

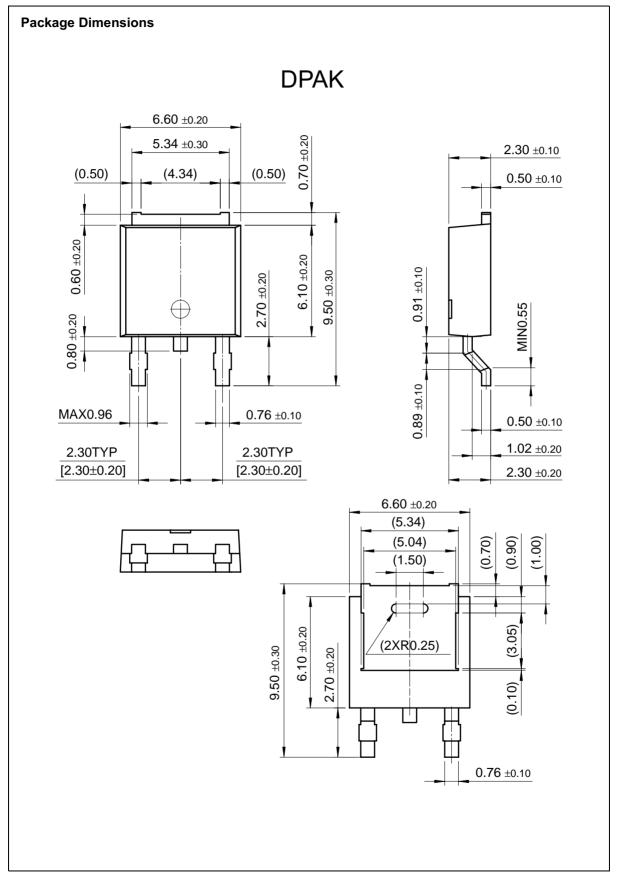




IPAK

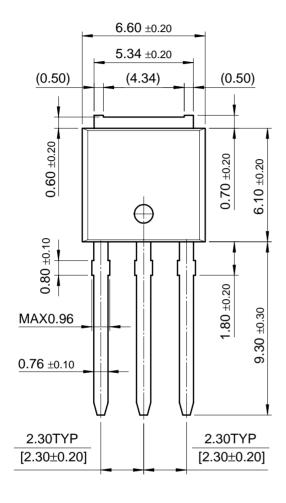

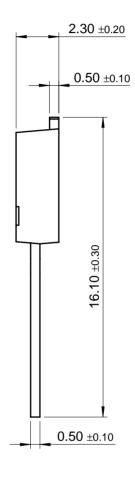



TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

 $\begin{array}{ll} \mathsf{FACT}^\mathsf{TM} & \mathsf{QFET}^\mathsf{TM} \\ \mathsf{FACT} \ \mathsf{Quiet} \ \mathsf{Series}^\mathsf{TM} & \mathsf{QS}^\mathsf{TM} \end{array}$

FAST[®] Quiet Series[™] SuperSOT[™]-3 GTO[™] SuperSOT[™]-6

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR INTERNATIONAL.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to

result in significant injury to the user.


2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

©2000 Fairchild Semiconductor International Rev. A, January 2000

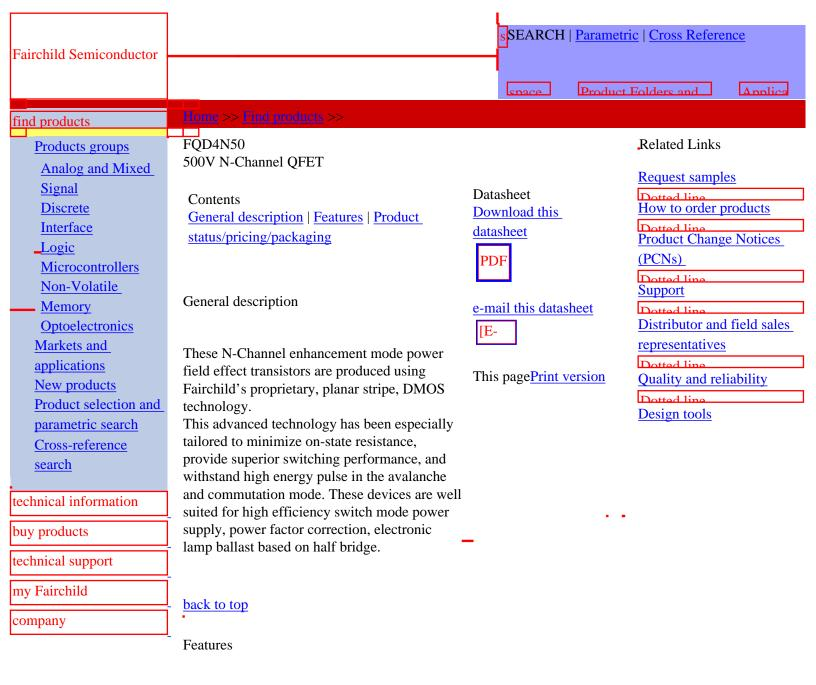

- 2.6A, 500V, $R_{DS(on)} = 2.7\Omega$ @ $V_{GS} = 10$
- Low gate charge (typical 10 nC)
- Low Crss (typical 6.0 pF)
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability

back to top

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Packing method
FQD4N50TF	Full Production	\$0.58	TO-252(DPAK)	2	TAPE REEL

FQD4N50TM	Full Production	\$0.58	TO-252(DPAK)	2	TAPE REEL
,					

^{* 1,000} piece Budgetary Pricing

back to top

<u>Home</u> | <u>Find products</u> | <u>Technical information</u> | <u>Buy products</u> | <u>Support</u> | <u>Company</u> | <u>Contact us</u> | <u>Site index</u> | <u>Privacy policy</u>

© Copyright 2002 Fairchild Semiconductor