




[PAGE BACK](#) [CLOSE](#)

**Product Name** Common Mode Filter for Power Line  
**Series** ACM Series  
**Type** 7060 Type  
**Part Number** ACM7060-301-2PL-TL01

Product Lifecycle Stage PROD

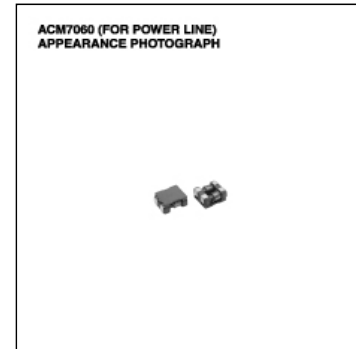

#### Specification

Mounting Method Flag	Yes	
Shape	Chip	
AC/DC Classification	DC	
Number of Elements	Nom	2
Number of Circuits	Nom	2
Size Code	7060	
Body Length(L)	Nom	7 m m
Body Breadth(W)	Nom	6 m m
Body Height(T)	Nom	3.5 m m
Common Mode Impedance	Min	500 Ohm
	Typ	700 Ohm
Frequency of Common Mode Impedance	Nom	100 M Hz
Rated Voltage	Max	50 V
Rated Current	Max	4 A
Insulation Resistance	Min	10 M Ohm
DC Resistance	Max	0.015 Ohm
Soldering Method	Reflow,Iron Soldering	
Category Temperature Range	Min	-25 Cel
	Max	85 Cel
Storage Temperature Range	Min	-25 Cel
	Max	85 Cel
Weight	Nom	0.35 g

#### Summary/Applications/Feature

Summary	A chip-type common mode filter for large current applications.
Applications	Used for power line noise suppression for any electronic devices.Used to counter adapter/battery line noise for relatively large electronic devices such as notebook PCs, stand-alone word processors,etc.
Feature	Height and size have been considered, resulting in a compact and light-weight choke coil. Applicable for the miniaturization required to reduce the size and weight of portable equipment. The products contain no lead and also support lead-free soldering. This product does not contain regulated substances that are slated to be included in RoHS.

#### Packaging

Packing	Blister (Plastic)Taping [330mm Reel]	
Minimum Package Qty	Nom	1500 Pcs
Minimum Order Qty	Nom	1500 Pcs

[Details](#)

#### ● [ Caution ]

Specifications which provide more details for the proper and safe use of the described product are available upon request.

#### ● [ Notice of Revision and Improve ]

All specifications are subject to change without notice.

[PAGE TOP](#)

Copyright(c) 1996-2008 All rights reserved.