


SEMICONDUCTOR®

## KSP92/93

## High Voltage Transistor



# **PNP Epitaxial Silicon Transistor**

## Absolute Maximum Ratings T<sub>a</sub>=25°C unless otherwise noted


Symbol	Parameter	Value	Units	
V <sub>CBO</sub>	Collector-Base Voltage			
	: KSP92	-300	V	
	: KSP93	-200	V	
V <sub>CEO</sub>	Collector-Emitter Voltage			
	: KSP92	-300	V	
	: KSP93	-200	V	
V <sub>EBO</sub>	Emitter-Base Voltage	-5	V	
lc	Collector Current	-500	mA	
P <sub>C</sub>	Collector Power Dissipation (T <sub>a</sub> =25°C)	625	mW	
	Derate above 25°C	5	mW/°C	
P <sub>C</sub>	Collector Power Dissipation (T <sub>C</sub> =25°C)	1.5	W	
	Derate above 25°C	12	mW/°C	
ТJ	Junction Temperature	150	°C	
T <sub>STG</sub>	Storage Temperature	-55 ~ 150	°C	

## **Electrical Characteristics** $T_a=25^{\circ}C$ unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Max.	Units
BV <sub>CBO</sub>	Collector-Base Breakdown Voltage : KSP92 : KSP93	I <sub>C</sub> = -100μΑ, I <sub>E</sub> =0	-300 -200		V
<u> </u>			-200		v
BV <sub>CEO</sub>	* Collector-Emitter Breakdown Voltage : KSP92	$I_{C}$ = -1mA, $I_{B}$ =0	-300		v
	: KSP93		-200		v
BV <sub>EBO</sub>	Emitter-Base Breakdown Voltage	I <sub>E</sub> = -100μA, I <sub>C</sub> =0	-5		V
I <sub>CBO</sub>	Collector Cur-off Current				
020	: KSP92	V <sub>CB</sub> = -200V, I <sub>E</sub> =0		-0.25	μΑ
	: KSP93	V <sub>CB</sub> = -160V, I <sub>E</sub> =0		-0.25	μΑ
I <sub>EBO</sub>	Emitter Cut-off Current	V <sub>EB</sub> = -3V, I <sub>C</sub> =0		-0.10	μA
h <sub>FE</sub>	* DC Current Gain	V <sub>CE</sub> = -10V, I <sub>C</sub> = -1mA	25		
		$V_{CE}$ = -10V, $I_{C}$ = -10mA	40		
		V <sub>CE</sub> = -10V, I <sub>C</sub> = -30mA	25		
V <sub>CE</sub> (sat)	*Collector-Emitter Saturation Voltage	I <sub>C</sub> = -20mA, I <sub>B</sub> = -2mA		-0.50	V
V <sub>BE</sub> (sat)	* Base-Emitter Saturation Voltage	I <sub>C</sub> = -20mA, I <sub>B</sub> = -2mA		-0.90	V
f <sub>T</sub>	Current Gain Bandwidth Product	V <sub>CE</sub> = -20V, I <sub>C</sub> = -10mA, f=100MHz	50		MHz
Cob	Output Capacitance				
	: KSP92	V <sub>CB</sub> = -20V, I <sub>E</sub> =0		6	pF
	: KSP93	f=1MHz		8	pF


### ©2001 Fairchild Semiconductor Corporation

KSP92/93

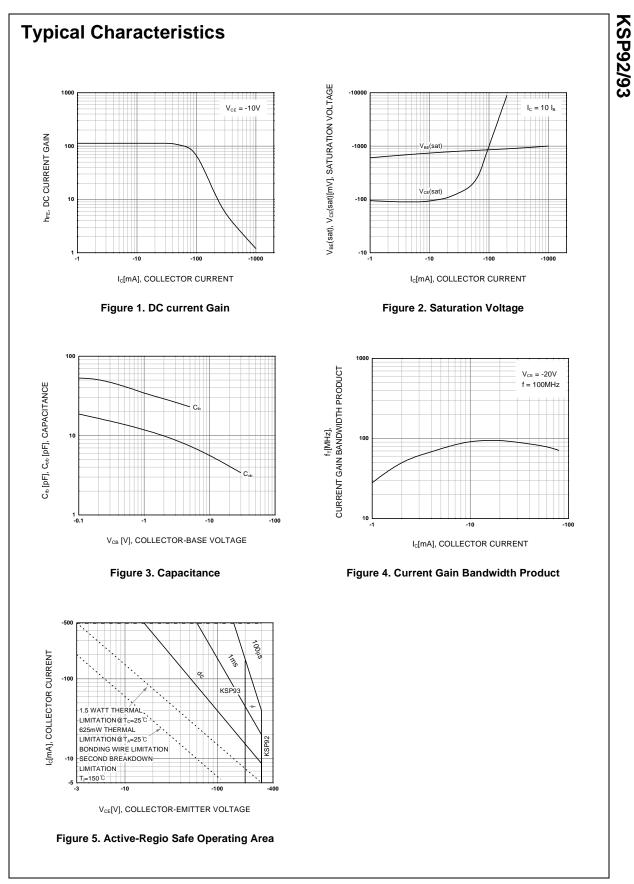

©2001 Fairchild Semiconductor Corporation

Rev. A1, July 2001

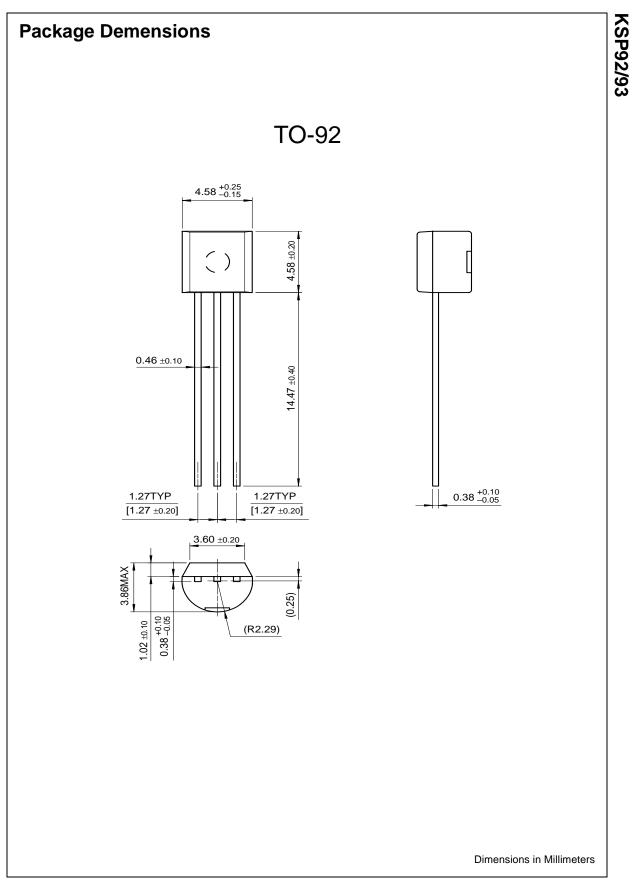

#### TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx<sup>TM</sup> Bottomless<sup>TM</sup> CoolFET<sup>TM</sup>  $CROSSVOLT^{TM}$ DenseTrench<sup>TM</sup> DOME<sup>TM</sup> EcoSPARK<sup>TM</sup>  $E^2CMOS^{TM}$ EnSigna<sup>TM</sup> FACT<sup>TM</sup> FACT Quiet Series<sup>TM</sup> FAST<sup>®</sup> FASTr<sup>™</sup> FRFET<sup>™</sup> GlobalOptoisolator<sup>™</sup> GTO<sup>™</sup> HiSeC<sup>™</sup> ISOPLANAR<sup>™</sup> LittleFET<sup>™</sup> MicroFET<sup>™</sup> MICROWIRE<sup>™</sup> OPTOLOGIC<sup>™</sup>

OPTOPLANAR™ PACMAN™ POP™ Power247™ PowerTrench<sup>®</sup> QFET™ QS™ QT Optoelectronics™ Quiet Series™ SLIENT SWITCHER<sup>®</sup> SMART START™ STAR\*POWER<sup>™</sup> Stealth<sup>™</sup> SuperSOT<sup>™</sup>-3 SuperSOT<sup>™</sup>-6 SuperSOT<sup>™</sup>-8 SyncFET<sup>™</sup> TruTranslation<sup>™</sup> TinyLogic<sup>™</sup> UHC<sup>™</sup> UltraFET<sup>®</sup> VCX<sup>™</sup>

STAR\*POWER is used under license

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### **PRODUCT STATUS DEFINITIONS**

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

				ι				
Deinskild Comission de star				sSEARCH   ]	Parametric   C	ross Reference		
Fairchild Semiconductor	:			-				
				snace	Product Folde	ers and Applica		
find products	Home >> Find p	products >>						
Products groups	KSP93				Rel	ated Links		
Analog and Mixed	PNP Epitaxial S	ilicon Transistor			Reg	uest samples		
<u>Signal</u>	Contents		Da	atasheet	Dot	ttad line		
Discrete Interface	<u>Applications   Product</u> status/pricing/packaging		Download this datasheet			How to order products Dotted line Product Change Notices		
Microcontrollers			P	PDF		<u>Ns)</u>		
Non-Volatile	Annlingtions				• • <u>Sup</u>	port		
<u>Memory</u>	Applications		e-mail this datasheet			Dotted line Distributor and field sales		
Optoelectronics Markets and			[]	E-		resentatives		
applications	High Voltage T	ransistor				Dotted line		
New products				nis page int version		ality and reliability		
Product selection and	back to top		<u><b>F1</b></u>			ign tools		
parametric search	•				<u></u>	<u></u>		
<u>Cross-reference</u> search	Product status/p	ricing/packaging						
<u>scaren</u>	Product	Product status	Pricing*	Package typ	e Leads	Packing method		
technical information	KSP93TA	Full Production	\$0.058	<u>TO-92</u>	3	TAPE REEL		
buy products	KSP93BU	Full Production	\$0.058	TO-92	3	BULK		
technical support	* 1,000 piece Bi							
my Fairchild								
company	back to top							

Home | Find products | Technical information | Buy products | Support | Company | Contact us | Site index | Privacy policy

© Copyright 2002 Fairchild Semiconductor

			l	s <mark>SEARCH   <u>Paran</u></mark>	petric   Cro	oss Reference	
Fairchild Semiconductor						<u>533 Reference</u>	
				space Prod	uct Folder	s and Applica	
	Home >> Find pro	ducts >>					
find products Products groups	KSP92				Rela	ted Links	
Analog and Mixed	PNP Epitaxial Sili	con Transistor			Requ	lest samples	
<u>Signal</u> <u>Discrete</u>	Contents <u>Applications   Product</u> <u>status/pricing/packaging</u>		Datasheet Download this		Dotted line How to order products		
Interface _Logic				<u>sheet</u>	Prod	Dotted line Product Change Notices	
Microcontrollers			PD	F	<ul> <li>(PCNs)</li> <li>Dotted line</li> <li>Support</li> <li>Dotted line</li> <li>Dotted line</li> <li>Distributor and field sales</li> </ul>		
Non-Volatile	Applications High Voltage Transistor			- · · ·			
<u>Memory</u> Optoelectronics				ail this datasheet			
Markets and			[E- This page		representatives Dotted line Quality and reliability		
applications							
New products				t version		ed line	
Product selection and parametric search	back to top				Design tools		
Cross-reference	Product status/pric	ing/nackaging					
<u>search</u>	i ioduci status/prie	ing/packaging					
technical information	Product	Product status	Pricing*	Package type	Leads	Packing method	
	KSP92ATA	Full Production	\$0.058	<u>TO-92</u>	3	TAPE REEL	
buy products	KSP92TA	Full Production	\$0.058	<u>TO-92</u>	3	TAPE REEL	
technical support	KSP92ABU	Full Production	\$0.058	<u>TO-92</u>	3	BULK	

**TO-92** 

<u>TO-92</u>

3

3

TAPE REEL

BULK

\$0.058

\$0.058

company

my Fairchild

I V

\* 1,000 piece Budgetary Pricing

back to top

KSP92H1TA

KSP92BU

<u>Home</u> | <u>Find products</u> | <u>Technical information</u> | <u>Buy products</u> | <u>Support</u> | <u>Company</u> | <u>Contact us</u> | <u>Site index</u> | <u>Privacy policy</u>

**Full Production** 

**Full Production** 

© Copyright 2002 Fairchild Semiconductor