

Low Voltage, High-Bandwidth, 3-Channel 2:1 Mux/DeMux, *NanoSwitch*™

Features


- · Near-Zero propagation delay
- 5-ohm switches connect inputs to outputs
- High signal passing bandwidth (500 MHz)
- · Beyond Rail-to-Rail switching
- 5V I/O tolerant with 3.3V supply in OFF and ON state
- 2.5V and 3.3V supply voltage operation
- · Hot Insertion Capable
- Industrial Operating Temperature: -40°C to +85°C
- 2kV ESD Protection (human body model)
- Latch-up Performance: >250mA per JESD17
- Packaging (Pb-free & Green available):
 - 16-pin 150-mil wide plastic QSOP (Q)
 16-pin 173-mil wide plastic TSSOP (L)

Description


The PI3CH360 is a 3-channel, 2:1 Multiplexer/Demultiplexer with 3-state outputs. The switch introduces no additional ground bounce noise or propagation delay.

The PI3CH360 device is very useful in switching signals that have high bandwidth (500 MHz).

Block Diagram

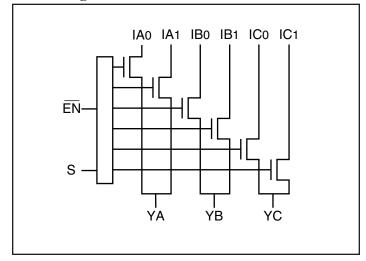

Pin Configuration

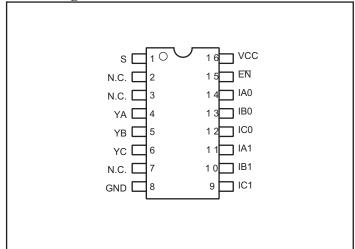

Note: N.C. = No internal connecion

Pin Description

Pin Name	Description
IAN to ICN	Data Inputs
S	Select Inputs
EN	Enable
YA to YC	Data Outputs
GND	Ground
V _{CC}	Power

Truth Table⁽¹⁾

ĒΝ	S	YA	YB	YC	Function
Н	X	Hi-Z	Hi-Z	Hi-Z	Disable
L	L	IA0	IB0	IC0	S=0
L	Н	IA1	IB1	IC1	S=1

Notes:

H=High Voltage Level
 L=Low Voltage Level



Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature	65°C to +150°C
Ambient Temperature with Power Applied	40°C to +85°C
Supply Voltage to Ground Potential	0.5V to +4.6V
DC Input Voltage	0.5V to +6.0V
DC Output Current	120mA
Power Dissipation	0.5W

Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

$\textbf{DC Electrical Characteristics, 3.3V Supply} \ (\text{Over Operating Range, T}_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}, \ V_{CC} = 3.3\text{V} \pm 10\%)$

Parameters	Description	Test Conditions ⁽¹⁾	Min.	Typ.(2)	Max.	Units
V_{IH}	Input HIGH Voltage	Guaranteed Logic HIGH Level	2.0			
V_{IL}	Input LOW Voltage	Guaranteed Logic LOW Level	-0.5		0.8	V
V _{IK}	Clamp Diode Voltage	$V_{CC} = Min., I_{IN} = -18mA$		-1.3	-1.8	
I _{IH}	Input HIGH Current	$V_{CC} = Max., V_{IN} = V_{CC}$			±1	
$I_{ m IL}$	Input LOW Current	$V_{CC} = Max., V_{IN} = GND$			±1	μΑ
I _{OZH}	High-Impedence Current ⁽³⁾	$0 \le Y$, $In \le V_{CC}$			±1	
R _{ON}	Switch On-Resistance ⁽⁴⁾	$V_{CC} = Min., V_{IN} = 0.0V$ $I_{ON} = -48mA \text{ or } -64mA$		4	6	Ω
		$V_{CC} = Min., V_{IN} = 3.6V, I_{ON} = -15mA$		5	8	

Notes:

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- 2. Typical values are at $V_{CC} = 3.3V$, $T_A = 25$ °C ambient and maximum loading.
- 3. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
- 4. Measured by the voltage drop between Y and In pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (Y, In) pins

06-0247 2 PS8727C 05/10/06



DC Electrical Characteristics, 2.5V Supply (Over Operating Range, $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, $V_{CC} = 2.5\text{V} \pm 10\%$)

Parameters	Description	Test Conditions ⁽¹⁾	Min.	Typ.(2)	Max.	Units
$V_{ m IH}$	Input HIGH Voltage	Guaranteed Logic HIGH Level	1.8		$V_{CC} + 0.3$	
$V_{ m IL}$	Inout LOW Voltage	Guaranteed Logic LOW Level	-0.3		0.8	V
V_{IK}	Clamp Diode Voltage	$V_{CC} = Max., I_{IN} = -6mA$		-0.7	-1.8	
I_{IH}	Input HIGH Current	$V_{CC} = Max., V_{IN} = V_{CC}$			±1	
I_{IL}	Input LOW Current	$V_{CC} = Max., V_{IN} = GND$			±1	μΑ
I _{OZH}	High Impedance Current ⁽³⁾	$0 \le Y$, $In \le V_{CC}$			±1	
Day	Switch On-Resistance ⁽⁴⁾	$V_{CC} = Min., V_{IN} = 0.0V,$ $I_{ON} = -48mA$		6	8	Ω
R _{ON}	Switch On-Resistance	$V_{CC} = Min., V_{IN} = 2.25V,$ $I_{ON} = -15mA$		7	14	52

Notes:

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- 2. Typical values are at $V_{CC} = 3.3V$, $T_A = 25^{\circ}C$ ambient and maximum loading.
- 3. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
- 4. Measured by the voltage drop between Y and In pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (Y, In) pins

Capacitance ($T_A = 25$ °C f = 1 MHz)

Parameters ⁽¹⁾	Description	Test Conditions	Тур.	Units
C_{IN}	Input Capacitance		3.0	
C _{OFF(IN)}	In Capacitance, Switch Off	V0V	3.5	nE
$C_{OFF(Y)}$	Y Capacitance, Switch Off	$V_{IN} = 0V$	7.0	pF
C _{ON}	Y/In Capacitance, Switch On		10.0	

Notes:

Power Supply Characteristics

Parameters	Description	Test Conditions ⁽¹⁾	Min.	Тур.	Max.	Units
I_{CC}	Quiescent Power Supply Current	$V_{CC} = 3.6V$, $V_{IN} = GND$ or V_{CC}			0.8	mA

Notes:

1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.

06-0247 3 PS8727C 05/10/06

^{1.} These parameters are determined by device characterization but are not production tested.



Dynamic Electrical Characteristics Over the Operating Range ($T_A = -40^{\circ}$ to $+85^{\circ}$, $V_{CC} = 3.3 \text{V} \pm 10\%$)

Parameter	Description	Test Condition	Min.	Тур.	Max.	Units
X _{TALK}	Crosstalk	See Test Diagram		-60		σι
O _{IRR}	Off-Isolation	See Test Diagram		-60		dB
BW	-3dB Bandwidth	See Test Diagram	200	500		MHz

Switching Characteristics over 3.3V Operating Range

Dayamataya	Parameters Description		Com.			Units
Farameters	Description	Conditions ⁽¹⁾	Min.	Тур.	Max.	Units
t _{PLH} t _{PHL}	Propogation Delay ^(2,3) Y to In, In to Y	See Test Diagram			0.3	
t _{PZH} t _{PZL}	Enable Time S or \overline{EN} to Y or In	Can Tost Dingram	1.5		9.0	ns
$t_{ m PHZ} \ t_{ m PLZ}$	Disable Time S or EN to Y or In	See Test Diagram	1.5		9.0	

Notes:

- 1. See test circuit and waveforms.
- 2. This parameter is guaranteed but not tested on Propagation Delays.
- 3. The switch contributes no propagational delay other than the RC delay of the On-Resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.30ns for 10pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.

Switching Characteristics over 2.5V Operating Range

Danamatana	Description	Conditions ⁽¹⁾	Co	Units	
Parameters	Description	Conditions	Min.	Max.	Units
t _{PLH} t _{PHL}	Propogation Delay ^(2,3) Y to In, In to Y	See Test Diagram		0.3	
t _{PZH} t _{PZL}	Enable Time S or EN to Y or In	Soo Tost Diagram	1.5	15.0	ns
t _{PHZ} t _{PLZ}	Disable Time S or EN to Y or In	See Test Diagram	1.5	12.0	


Notes:

- 1. See test circuit and waveforms.
- This parameter is guaranteed but not tested on Propagation Delays.
- 3. The switch contributes no propagational delay other than the RC delay of the On-Resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.30ns for 10pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.

06-0247 4 PS8727C 05/10/06



Test Circuit for Electrical Characteristics

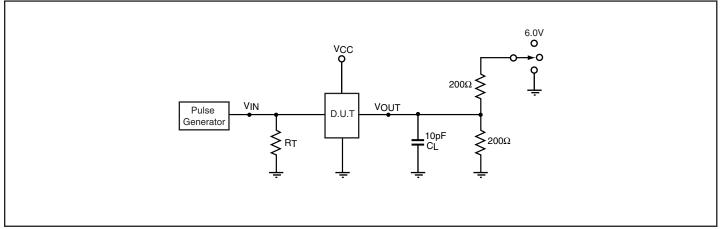


Notes:

- C_L = Load capacitance: includes jig and probe capacitance.
- R_T = Termination resistance: should be equal to Z_{OUT} of the Pulse Generator
- Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control.
- · Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- All input impulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50-ohm, t_R ≤ 2.5ns, t_F ≤ 2.5ns.
- The outputs are measured one at a time with one transition per measurement.

Switch Positions

Test	Switch
t _{PLZ} , t _{PZL}	6.0V
t _{PHZ} , t _{PZH}	GND
Prop Delay	Open


Test Circuit for Dynamic Electrical Characteristics

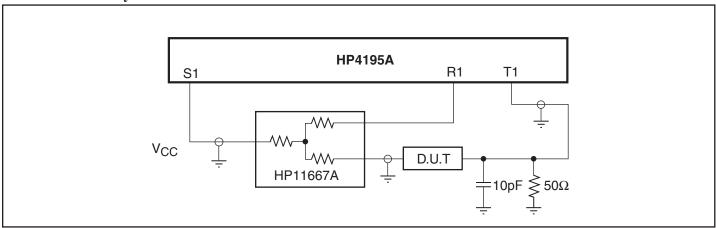

06-0247 5 PS8727C 05/10/06



Switching Waveforms

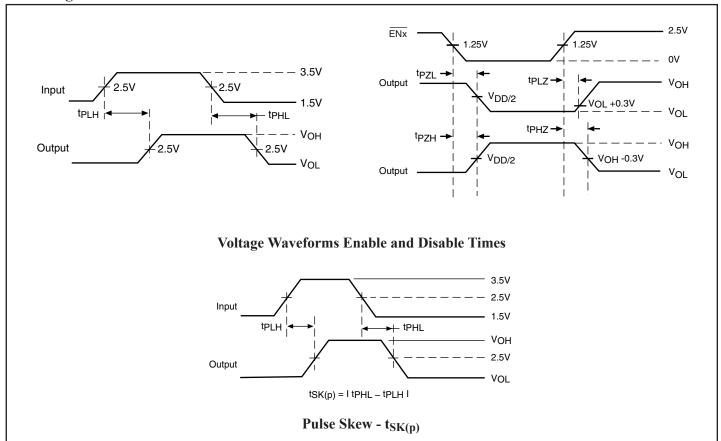

06-0247 6 PS8727C 05/10/06



Applications Information

Logic Inputs

The logic control inputs can be driven upto 3.6V regardless of the supply voltage. For example, given a +3.3V supply, \overline{EN} may be driven LOW to 0V and HIGH to 3.6V. Driving \overline{EN} Rail-to-Rail[®] minimizes power consumption.

Power Supply-Sequencing


Proper power supply sequencing is recommended for all CMOS devices. Always apply V_{CC} before applying signals to the input/output or control pins.

Hot Insertion

For Datacom and Telecom applications that have ten or more volts passing through the backplane, a high voltage from the power supply may be seen at the device input pins during hot insertion. The PI3CHxx devices have maximum limits of 6V and 120mA for 20ns. If the power is higher or applied for a longer time or repeatedly reaches the maximum limits, the devices can be damaged.


Rail-to-Rail is a registered trademark of Nippon Motorola, Ltd.

Packaging Mechanical: 16-pin QSOP (Q)

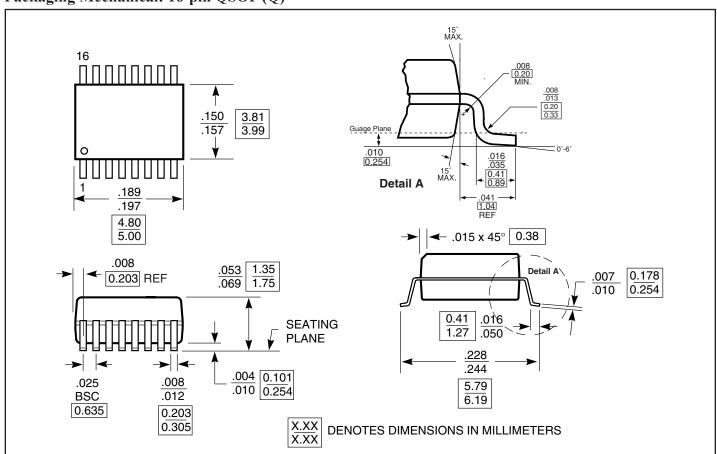



Packaging Mechanical: 16-pin TSSOP (L)

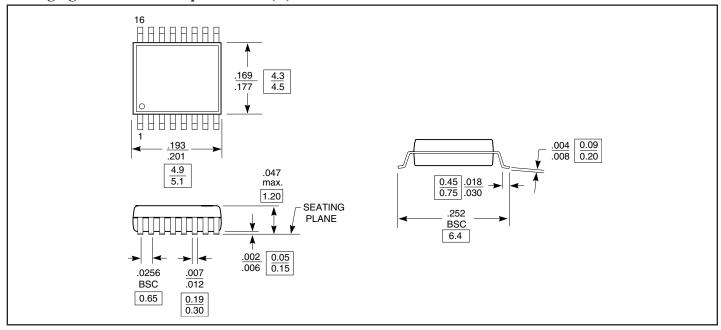

Ordering Information

Ordering Code	Packaging Code	Package Description
PI3CH360Q	Q	150-mil, 16-pin QSOP
PI3CH360QE	Q	Pb-free & Green, 150-mil, 16-pin QSOP
PI3CH360L	L	173-mil, 16-pin TSSOP
PI3CH360LE	L	Pb-free & Green, 173-mil, 16-pin TSSOP

Notes:

- Thermal characteristics can be found on the company web site at www.pericom.com/packaging/
- E = Pb-free & Green
- Adding an X suffix = Tape/Reel