


## H11B1 H11B2 H11B3 TIL113

# 6-PIN PHOTODARLINGTON OPTOCOUPLER

#### Feature:

- High Isolation voltage (Viso = 5000V rms)
- Creepage distance > 7.62mm
- Operating Temperature up to 100 °C
- Meets all JEDEC specifications
- Available in Tube or Tape and reel
- Available with standard DIP, Wide lead bend, and SMD lead bend options.
- Conventional black housing package

#### Schematic



#### Pin Configuration

- 1. Anode
- 2. Cathode
- 3. No Connection
- 4. Emitter
- 5. Collector
- 6. Base


#### **Certification & Compliance:**


- Pb free and RoHS Compliant
- UL recognized (File # E338132)
- VDE recognized (File #40030457)




**Dimension: (Dot location indicates pin 1)** 

#### 6-Pin Dip (standard):










Product: H11B1 H11B2 H11B3 TIL113series	Date: February 1, 2011	Page 1 of 12
	Version# 1.1	




## Wide lead bend (Option W):









### SMD lead bend (Option S):

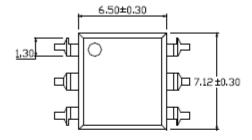





All Dimensions are in mm

Tolerance =  $\pm - 0.1$ mm

Product: H11B1 H11B2 H11B3 TIL113series	Date: February 1, 2011	Page 2 of 12
	Version# 1.1	





# **Absolute Maximum Rating:**

Symbol	Parameter	Rating	Units
T <sub>STG</sub>	Storage Temperature	-55 ~ <b>+</b> 150	°C
$T_{OPR}$	Operating Temperature	-55 ~ <b>+</b> 100	٥C
T <sub>SOL</sub>	Lead Solder Temperature	260 for 10 sec	°C
P <sub>TOT</sub>	Total Power Dissipation	200	mW
EMITTER			·
I <sub>F</sub>	Continuous Forward Current	60	mA
IFM	Peak Forward Current	1	А
V <sub>R</sub>	Reverse Voltage	6	V
Ъ	Power Dissipation	120	mW
P <sub>D</sub>	Power Dissipation Derated above 25°C	2	mW/ºC
DETECTO	OR .		
V <sub>CEO</sub>	Collector–Emitter Voltage	55	V
V <sub>CBO</sub>	Collector-Base Voltage	55	V
V <sub>ECO</sub>	Emitter-Collector Voltage	7	V
Vево	Emitter-Base Voltage	7	V
Б	Collector Power Dissipation	150	mW
Pc	Collector Power Dissipation Derated above 25 °C	2	.mW/ºC

Product: H11B1 H11B2 H11B3 TIL113series	Date: February 1, 2011	Page 3 of 12
	Version# 1.1	



## **Electrical Characteristic** (T=25 °C)


### **Emitter**

Symbol	Characteristics	Device	Device Test Condition Range			Unit	
Symbol	Characteristics	Device	Device Test Condition		Тур	Max	Offic
V <sub>F</sub>	Forward Voltage	H11B1	IF = 10mA	-	1.2	1.5	V
I <sub>R</sub>	Reverse Current	H11B2 H11B3	VR = 6V	-	-	10	uA
Ct	Input Capacitance	TIL113	V = 0, f = 1MHz	-	50	-	pF

#### **Detector**

Symbol	Characteristic	Device Test		Range			Unit	
Symbol	Characteristic	Device	Condition	Min	Тур	Max	Offic	
I <sub>CEO</sub>	Collector-Emitter dark current	H11B1 H11B2 H11B3 TIL113	Vce = 10V	ı	-	100	nA	
BV <sub>CEO</sub>	Collector-Emitter breakdown voltage			Ic = 1mA	55	-	1	V
BV <sub>CBO</sub>	Collector-Base breakdown voltage		Ic = 0.1mA	55	-	-	V	
BVECO	Emitter-Collector breakdown voltage		I <sub>E</sub> = 0.1mA	7	-	-	V	

Product: H11B1 H11B2 H11B3 TIL113series	Date: February 1, 2011	Page 4 of 12
	Version# 1.1	



#### 6-PIN PHOTODARLINGTON **OPTOCOUPLER**

### **DC Transfer Characteristic**

Symbol	Characteristic	Device Test Condition			Range		Unit
Symbol	Characteristic	Device	Test Condition	Min	Тур	Max	Offic
		H11B1		500	-	-	
	Command Transfer	H11B2	$I_F = 1mA$ ,	200			
CTR	Current Transfer Ratio	H11B3	Vce = 5V	100	-	-	%
	Ratio	TIL113	I <sub>F</sub> = 10mA, V <sub>CE</sub> = 1V	300	-	-	
V <sub>CE(Sat)</sub>	Collector-Emitter	H11B1 H11B2 H11B3	IF = 8mA, Ic =1mA	-	-	1.0	V
5 <u>=</u> (6at)	saturation voltage	TIL113	$I_F = 8mA$ , $I_c = 2mA$	-	-	1.2	

## **Isolation Characteristic**

V <sub>ISO</sub>	Isolation Voltage	-	-	5000	-	-	Vrms
R <sub>ISO</sub>	Isolation Resistance	-	$V_{10} = 500 Vdc$	-	10 <sup>11</sup>	-	Ω
C <sub>ISO</sub>	Isolation Capacitance	-	Vio = 0, f =1MHz	-	0.8	-	pF


### **AC Characteristic**

		H11B1	Vcc = 10V,				
		H11B2	$I_F = 10mA$ ,	-	25	-	
Ton	Turn on time	H11B3	$R_L = 100\Omega$				110
I on	i um on ume		Vcc = 10V,				us
		TIL113	Ic = 50mA,	-	-	5	
			$I_F = 200 \text{mA}$				
		H11B1	Vcc = 10V,				
		H11B2	Ic = 10mA,	_	18	-	
Toff	Turn off time	H11B3	$R_L = 100\Omega$				110
I Off	Turri on time		Vcc = 10V,				us
		TIL113	Ic = 10mA,	-	-	100	
			IF = 200mA				

Product: H11B1 H11B2 H11B3 TIL113series	Date: February 1, 2011	Page 5 of 12
	Version# 1.1	




## **Characteristic Curves:**

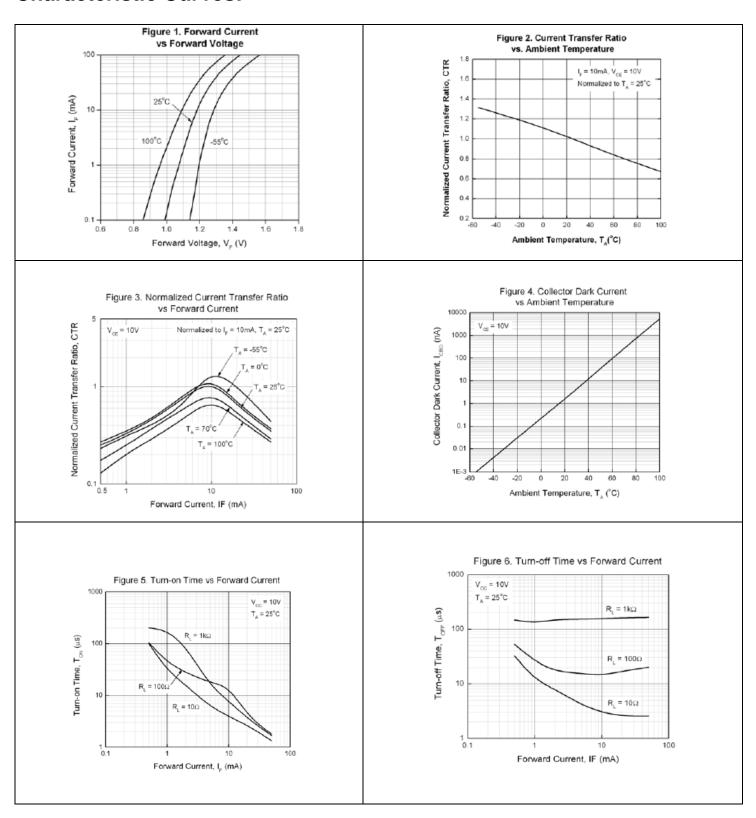


Product: H11B1 H11B2 H11B3 TIL113series	Date: February 1, 2011	Page 6 of 12
	Version# 1.1	



## **Test Circuit for Response Time**

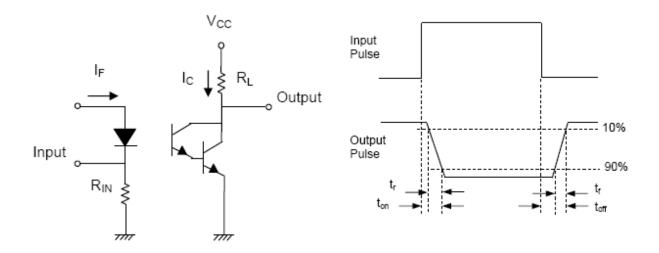


## **Solder Profile & Footprint:**

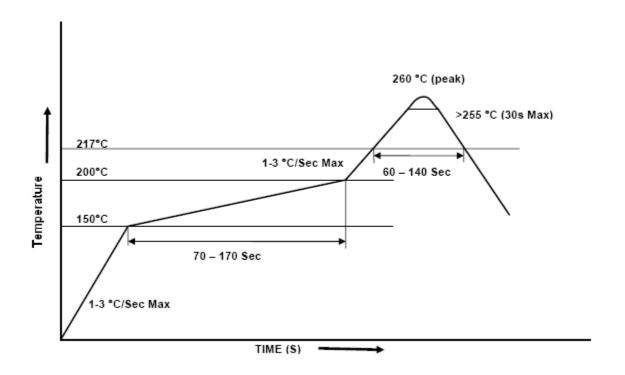


Product: H11B1 H11B2 H11B3 TIL113series	Date: February 1, 2011	Page 7 of 12
	Version# 1.1	



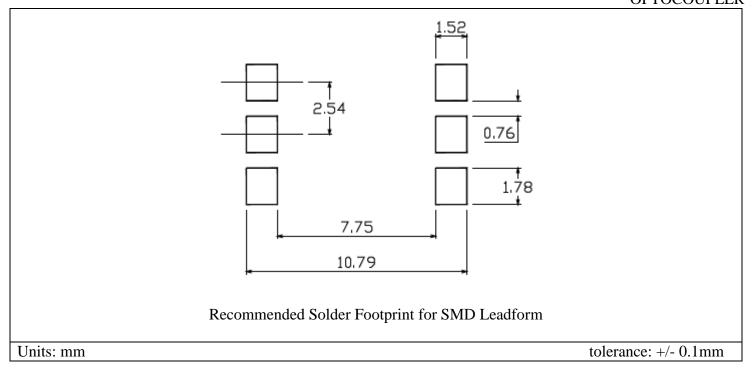

## **Device Marking:**



Q = QT-Brightek Corporation

XXXX = H11B1, H11B2, H11B3, or TIL113

F = Country of Origin

R = Binning Option

Y = Year


WW = Week

V = VDE Option

Product: H11B1 H11B2 H11B3 TIL113series	Date: February 1, 2011	Page 8 of 12
	Version# 1.1	




# **Pack and Reel Specification:**



Direction of feed from reel

## **Tape Dimension**

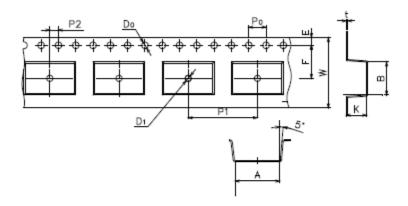

Dimension No.	А	В	Do	D1	E	F
Dimension (mm)	10.4±0.1	7.52±0.1	1.5±0.1	1.5+0.1/-0	1.75±0.1	7.5±0.1

Dimension No.	Po	P1	P2	t	w	к
Dimension (mm)	4.0±0.15	16.0±0.1	2.0±0.1	0.35±0.03	16.0±0.2	4.5±0.1

Product: H11B1 H11B2 H11B3 TIL113series	Date: February 1, 2011	Page 9 of 12
	Version# 1.1	



# **Ordering Information:**

Part Number	Orderable Part Number	Options	Description	Quantity per
				packing
	H11B1	None	Standard 6pin DIP	60pcs / Tube
	H11B1V	None	With VDE marking	60pcs / Tube
	H11B1W	W	Wide lead bend (0.4 inch spacing)	60pcs / Tube
H11B1	H11B1WV	W	Wide lead bend (0.4 inch spacing) + VDE marking	60pcs / Tube
	H11B1STA	S	SMD lead form with tape and reel option	1000pcs / reel
	H11B1STAV	S	SMD lead form with tape and reel option + VDE marking	1000pcs / reel
	H11B2	None	Standard 6pin DIP	60pcs / Tube
	H11B2V	None	With VDE marking	60pcs / Tube
	H11B2W	W	Wide lead bend (0.4 inch spacing)	60pcs / Tube
H11B2	H11B2WV	W	Wide lead bend (0.4 inch spacing) + VDE marking	60pcs / Tube
	H11B2STA	S	SMD lead form with tape and reel option	1000pcs / reel
	H11B2STAV	S	SMD lead form with tape and reel option + VDE marking	1000pcs / reel
	H11B3	None	Standard 6pin DIP	60pcs / Tube
	H11B3V	None	With VDE marking	60pcs / Tube
	H11B3W	W	Wide lead bend (0.4 inch spacing)	60pcs / Tube
H11B3	H11B3WV	W	Wide lead bend (0.4 inch spacing) + VDE marking	60pcs / Tube
111100	H11B3STA	S	SMD lead form with tape and reel option	1000pcs / reel
	H11B3STAV	S	SMD lead form with tape and reel option + VDE marking	1000pcs / reel

Product: H11B1 H11B2 H11B3 TIL113series	Date: February 1, 2011	Page 10 of 12
	Version# 1.1	



#### 6-PIN PHOTODARLINGTON **OPTOCOUPLER**

	TIL113	None	Standard 6pin DIP	60pcs / Tube
	TIL113V	None	With VDE marking	60pcs / Tube
	TIL113W	W	Wide lead bend (0.4 inch spacing)	60pcs / Tube
TIL113	TIL113WV	W	Wide lead bend (0.4 inch spacing) + VDE marking	60pcs / Tube
	TIL113STA	S	SMD lead form with tape and reel option	1000pcs / reel
	TIL113STAV	S	SMD lead form with tape and reel option + VDE marking	1000pcs / reel

Product: H11B1 H11B2 H11B3 TIL113series	Date: February 1, 2011	Page 11 of 12
	Version# 1.1	



## **Revision History:**

Description:	Revision #	Revision Date
Initial release of H11B1/H11B2/H11B3/TIL113 series	1.0	4/22/2010
Feature, certification & compliance and ordering information updates	1.1	02/01/2011

#### **Disclaimer**

QT-BRIGHTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

## **Life Support Policy**

QT-BRIGHTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTEK. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Product: H11B1 H11B2 H11B3 TIL113series	Date: February 1, 2011	Page 12 of 12
	Version# 1.1	