SCLS104B - MARCH 1984 - REVISED MAY 1997

- High-Current 3-State Outputs Interface Directly With System Bus or Can Drive up to 15 LSTTL Loads
- Package Options Include Plastic Small-Outline (D), Shrink Small-Outline (DB), and Ceramic Flat (W) Packages, Ceramic Chip Carriers (FK), and Standard Plastic (N) and Ceramic (J) 300-mil DIPs

description


These quadruple bus buffer gates feature independent line drivers with 3-state outputs. Each output is disabled when the associated output-enable (\overline{OE}) input is high.

The SN54HC125 is characterized for operation over the full military temperature range of –55°C to 125°C. The SN74HC125 is characterized for operation from –40°C to 85°C.


FUNCTION TABLE (each buffer)

INP	JTS	OUTPUT
OE	Α	Y
L	Н	Н
L	L	L
Н	Χ	Z

SN54HC125 . . . J OR W PACKAGE SN74HC125 . . . D, DB, OR N PACKAGE (TOP VIEW)




SN54HC125 . . . FK PACKAGE (TOP VIEW)



NC - No internal connection

logic symbol†



† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12. Pin numbers shown are for the D, DB, J, N, and W packages.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



SN54HC125, SN74HC125 **QUADRUPLE BUS BUFFER GATES** WITH 3-STATE OUTPUTS

SCLS104B - MARCH 1984 - REVISED MAY 1997

logic diagram (positive logic)

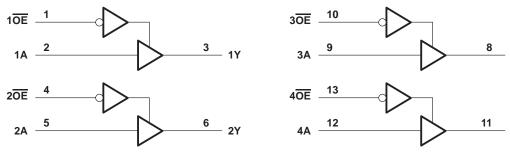

Pin numbers shown are for the D, DB, J, N, and W packages.

absolute maximum ratings over operating free-air temperature range

Supply voltage range, V _{CC}		
Input clamp current, I_{IK} ($V_I < 0$ or $V_I > V_{CC}$) (se	ee Note 1)	±20 mA
Output clamp current, IOK (VO < 0 or VO > VCO	c) (see Note 1)	±20 mA
Continuous output current, I_O ($V_O = 0$ to V_{CC})		±35 mA
Continuous current through V _{CC} or GND		±70 mA
Package thermal impedance, θ _{JA} (see Note 2):		
	DB package	158°C/W
	N package	78°C/W
Storage temperature range, T _{stq}		–65°C to 150°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

recommended operating conditions

			SI	154HC12	25	SN74HC125		25	UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	UNII
Vcc	Supply voltage		2	5	6	2	5	6	V
		V _{CC} = 2 V	1.5			1.5			
V_{IH}	High-level input voltage	V _{CC} = 4.5 V	3.15			3.15			V
		V _{CC} = 6 V	4.2			4.2			
	Low-level input voltage	V _{CC} = 2 V	0		0.5	0		0.5	
V_{IL}		$V_{CC} = 4.5 \text{ V}$	0		1.35	0		1.35	V
		V _{CC} = 6 V	0		1.8	0		1.8	
٧ _I	Input voltage		0		VCC	0		VCC	V
٧o	Output voltage		0		VCC	0		VCC	V
		V _{CC} = 2 V	0		1000	0		1000	
t _t	Input transition (rise and fall) time	$V_{CC} = 4.5 \text{ V}$	0		500	0		500	ns
		V _{CC} = 6 V	0		400	0		400	
T _A	Operating free-air temperature		-55	•	125	-40	•	85	°C



^{2.} The package thermal impedance is calculated in accordance with JESD 51, except for through-hole packages, which use a trace length of zero.

SCLS104B - MARCH 1984 - REVISED MAY 1997

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS		Vaa	Т	A = 25°C	;	SN54HC125		SN74HC125		UNIT
PARAMETER			Vcc	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
			2 V	1.9	1.998		1.9		1.9		
		I _{OH} = -20 μA	4.5 V	4.4	4.499		4.4		4.4		
Voн	$V_I = V_{IH} \text{ or } V_{IL}$		6 V	5.9	5.999		5.9		5.9		V
		I _{OH} = -6 mA	4.5 V	3.98	4.3		3.7		3.84		
		$I_{OH} = -7.8 \text{ mA}$	6 V	5.48	5.8		5.2		5.34		
	VI = VIH or VIL	I _{OL} = 20 μA	2 V		0.002	0.1		0.1		0.1	
			4.5 V		0.001	0.1		0.1		0.1	
VOL			6 V		0.001	0.1		0.1		0.1	V
		$I_{OL} = 6 \text{ mA}$	4.5 V		0.17	0.26		0.4		0.33	
		$I_{OL} = 7.8 \text{ mA}$	6 V		0.15	0.26		0.4		0.33	
lį	$V_I = V_{CC}$ or 0		6 V		±0.1	±100		±1000		±1000	nA
loz	$V_O = V_{CC}$ or 0		6 V		±0.01	±0.5		±10		±5	μΑ
Icc	$V_I = V_{CC}$ or 0,	I _O = 0	6 V			8		160		80	μΑ
Ci			2 V to 6 V		3	10		10		10	pF

switching characteristics over recommended operating free-air temperature range, C_L = 50 pF (unless otherwise noted) (see Figure 1)

PARAMETER	FROM TO		Vaa	T,	λ = 25°C	;	SN54H	IC125	5 SN74HC125		UNIT	
PARAMETER	(INPUT)	(OUTPUT)	VCC	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNII	
			2 V		48	120		150		150		
t _{pd}	Α	Υ	4.5 V		14	24		36		30	ns	
			6 V		11	20		25		26		
			2 V		53	120		180		150		
t _{en}	ŌĒ	Y	4.5 V		14	24		36		30	ns	
				6 V		11	20		31		26	
	ŌĒ	OE Y	2 V		30	120		180		150		
^t dis			Υ	4.5 V		15	24		36		30	ns
			6 V		14	20		31		26		
	Any	Any	2 V		28	60		90		75		
t _t			Any	4.5 V		8	12		18		15	ns
			6 V		6	10		15		13		

SN54HC125, SN74HC125 QUADRUPLE BUS BUFFER GATES WITH 3-STATE OUTPUTS

SCLS104B - MARCH 1984 - REVISED MAY 1997

switching characteristics over recommended operating free-air temperature range, C_L = 150 pF (unless otherwise noted) (see Figure 1)


PARAMETER	FROM TO		Vaa	T,	ղ = 25°C	;	SN54F	IC125	SN74H	C125	UNIT														
FARAWIETER	(INPUT)	(OUTPUT)	VCC	MIN	TYP	MAX	MIN	MAX	MIN	MAX	ONIT														
			2 V		67	150		225		190															
t _{pd}	А	Y	Υ	Y	Y	4.5 V		19	30		45		38	ns											
																					6 V		15	25	
	ŌĒ	OE Y	ŌĒ Y	2 V		100	135		200		170														
t _{en}				4.5 V		20	27		40		34	ns													
			6 V		17	23		34		29															
			2 V		45	210		315		265															
t _t		Any	4.5 V		17	42		63		53	ns														
			6 V		13	36		53		45															

operating characteristics, $T_A = 25^{\circ}C$


	PARAMETER	TEST CONDITIONS	TYP	UNIT
Cpd	Power dissipation capacitance per gate	No load	45	pF




PARAMETER MEASUREMENT INFORMATION




PARAI	METER	RL	CL	S1	S2
	t _{PZH} 50 pF 1 kΩ or		Open	Closed	
ten	tPZL	1 K22	or 150 pF	Closed	Open
4	tPHZ	1 kΩ	50 pF	Open	Closed
^t dis	tPLZ	1 K22 30 PF		Closed	Open
t _{pd} or t _t		_	50 pF or 150 pF	Open	Open

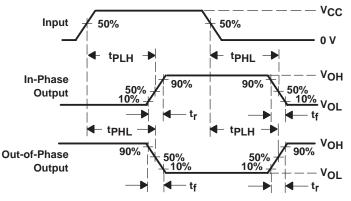

VOLTAGE WAVEFORMS
PROPAGATION DELAY AND OUTPUT TRANSITION TIMES





VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES FOR 3-STATE OUTPUTS

- NOTES: A. C_L includes probe and test-fixture capacitance.
 - B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
 - C. Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: PRR \leq 1 MHz, $Z_O = 50 \Omega$, $t_r = 6 \text{ ns}$.
 - D. The outputs are measured one at a time with one input transition per measurement.
 - E. tpLZ and tpHZ are the same as tdis.
 - F. tpzL and tpzH are the same as ten.
 - G. tplH and tpHL are the same as tpd.

Figure 1. Load Circuit and Voltage Waveforms



IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 1998, Texas Instruments Incorporated