

SAW Components

SAW filter GPS

Series/type: B9417

Ordering code: B39162B9417K610

Date: March 22, 2006

Version: 2.0

[©] EPCOS AG 2006. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.



SAW Components B9417

SAW filter 1575.42 MHz

Data sheet




Application

- Low-loss RF filter for mobile telephone GPS systems
- Impedance transformation from 50 Ω to 100 Ω
- Unbalanced to balanced operation
- Very low insertion attenuation
- Low amplitude ripple
- Usable passband 2.0 MHz




Features

- Package size 1.4 x1.1 x 0.4 mm³
- Package code QCS5F
- RoHS compatible
- Approximate weight 0.003 g
- Package for Surface Mount Technology (SMT)
- Ni, gold-plated terminals
- Electrostatic Sensitive Device (ESD)



Pin configuration

- 1 Input unbalanced
- 3,4 Output balanced
- 2,5 To be grounded





SAW Components B9417

SAW filter 1575.42 MHz

Data sheet

Characteristics

 $T = -30 \,^{\circ}\text{C} \text{ to } +85 \,^{\circ}\text{C}$ Operating temperature range:

 $\begin{array}{lll} Z_{S} & = & 50 \ \Omega \\ Z_{L} & = & 100 \ \Omega \end{array}$ Terminating source impedance: Terminating load impedance:

	min.	typ. @ 25 °C	max.	
Center frequency f _C	_	1575.42	_	MHz
1574.42 1576.42 MHz	_	1.1	1.4 ¹⁾	dB
Amplitude ripple (p-p) $\Delta\alpha$ 1574.42 1576.42 MHz	_	0.1	0.3	dB
Input VSWR				
1574.42 1576.42 MHz	_	1.3	1.8	
Output VSWR				
1574.42 1576.42 MHz	_	1.3	1.8	
Output amplitude balance ($ S_{31}/S_{21} $) 1574.42 1576.42 MHz	-1.0	0.6	1.0	dB
Output phase balance $(\phi(S_{31}) - \phi(S_{21}) + 180^{\circ})$ 1574.42 1576.42 MHz	40	4	40	0
1374.42 1370.42 WILL	–10	7	10	
Attenuation α				
Attenuation α 100.0 960.0 MHz	40	48		dB
960.0 1425.0 MHz	35	42		dB
1425.0 1475.0 MHz	30	42		dB
1475.0 1515.0 MHz	20	32	_	dB
1515.0 1525.0 MHz	17	27		dB
1625.0 1635.0 MHz	12	30	_	dB
1635.0 1675.0 MHz	20	30	_	dB
1675.0 1710.0 MHz	27	32	_	dB
1710.0 1850.0 MHz	30	32	_	dB
1850.0 1900.0 MHz	33	38	<u> </u>	dB
1900.0 1980.0 MHz	36	43	_	dB
1980.0 2400.0 MHz	32	36	_	dB
2400.0 3155.0 MHz	40	46	_	dB
3155.0 4000.0 MHz	35	39		dB
4000.0 6000.0 MHz	33	37		dB

^{1) 1.3} dB max. at 25 °C



SAW Components	B9417	
SAW filter	1575.42 MHz	:

Data sheet

Maximum ratings


Operable temperature range	Т	-40/+85	°C	
Storage temperature range	T_{stg}	-40/+85	°C	
DC voltage	V_{DC}	3	V	
ESD voltage	V_{ESD}	50 ¹⁾	V	machine model, 10 pulses
Input power at				source 50Ω , load 100Ω
8241525, 17102500 MHz	P _{IN}	10	dBm	cw
elsewhere	P_{IN}	5	dBm	cw

 $^{^{1)}}$ acc. to JESD22-A115A (machine model), 10 negative & 10 positive pulses.




SAW Components		B9417
SAW filter		1575.42 MHz
Data shoot	=MD	

Transfer function (narrow band)

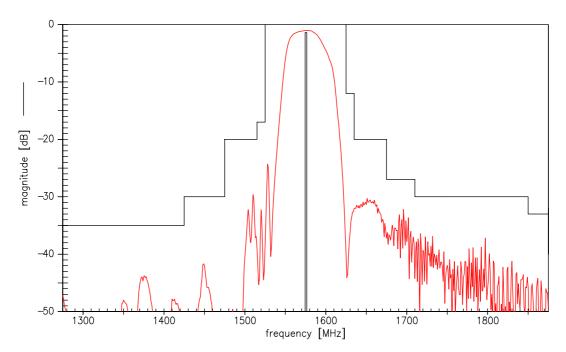

Transfer function (wide band)

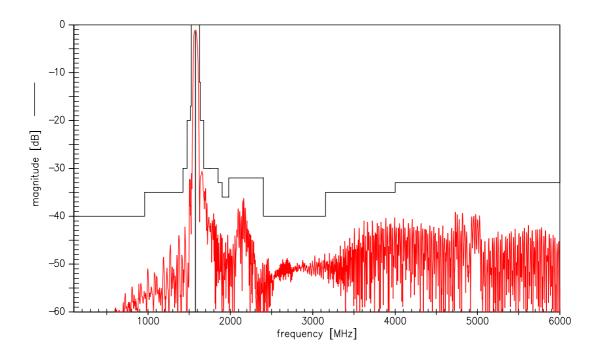



SAW Components B9417


SAW filter 1575.42 MHz


Data sheet

=MD


Smith charts


S₁₁ function





S₂₂ function







SAW Components		B9417
SAW filter		1575.42 MHz
Data sheet	SMD	

References

Туре	B9417
Ordering code	B39162B9417K610
Marking and package	C61157-A8-A1
Packaging	F61074-V8212-Z000
Date codes	L_1126
S-parameters	B9417_NB.s3p B9417_WB.s3p
Soldering profile	S_6001
RoHS compatible	defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com .

Published by EPCOS AG Surface Acoustic Wave Components Division P.O. Box 80 17 09, 81617 Munich, GERMANY

 $\ensuremath{\texttt{©}}$ EPCOS AG 2006. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.



Important notes

The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as "hazardous"). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available.
- Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).
- The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SIFI, SIKOREL, Silver-Cap, SIMID, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.