

## **Technical Data Sheet**

# 0603 Package Chip LED (0.6 mm Height)

### 19-213/W1D-ANPHY/3T

#### **Features**

- Package in 8mm tape on 13" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint version.

### **Descriptions**


- The 19-213 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

### **Applications**


- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.


### **Device Selection Guide**


Part No.	C	Lang Color	
rart No.	Material	<b>Emitted Color</b>	Lens Color
19-213/W1D-ANPHY/3T	InGaN	Pure White	Yellow Diffused




# **Package Outline Dimensions**








For reflow soldering (Propose)





**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm.

Everlight Electronics Co., Ltd. Device No.: SZDSE-193-W22 http://www.everlight.com Prepared date: 22-Aug-2005

Rev. 1

Page:2 of 12

Prepared by: Zhang huali



## **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 <b>~</b> +85	$^{\circ}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}$
Power Dissipation	Pd	110	mW
Electrostatic Discharge(HBM)	ESD	150	V
Peak Forward Current (Duty 1/10 @1KHz)	IF	100	mA
Soldering Temperature	Tsol	Reflow Soldering: 260°C for 10sec. Hand Soldering: 350°C for 3 sec.	



### **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	28.5		72.0	mcd	
Viewing Angle	2 0 1/2		130		deg	$I_F=5mA$
Forward Voltage	VF	2.70		3.15	V	
Reverse Current	Ir			50	$\mu$ A	V <sub>R</sub> =5V

## **Bin Range Of Luminous Intensity**

Symbol	Bin Code	Min.	Max.	Unit	Condition
Iv	N	28. 0	45.0	1	$I_F = 5mA$
	P	45.0	72.0	mcd	

## **Bin Range Of Luminous Voltage**

Group	Bin	Min	Max	Unit	Condition
	15	2.70	2.85		
Н	16	2.85	3.00	V	$I_F = 5mA$
	17	3.00	3.15		

### Notes:

1. Tolerance of Luminous Intensity  $\pm 10\%$ 

2.Tolerance of Forward Voltage ±0.05V



## **Chromaticity Coordinates Specifications for Bin Grading**


 $I_F = 5mA$ 

Groups	Bin Code	CIE_x	CIE_y
	1	0.274	0.226
		0.274	0.258
		0.294	0.286
		0.294	0.254
		0.274	0.258
	2	0.274	0.291
	2	0.294	0.319
		0.294	0.286
	3	0.294	0.254
		0.294	0.286
		0.314	0.315
A		0.314	0.282
A	4	0.294	0.286
		0.294	0.319
		0.314	0.347
		0.314	0.315
	5	0.314	0.282
		0.314	0.315
	3	0.334	0.343
		0.334	0.311
	6	0.314	0.315
		0.314	0.347
		0.334	0.376
		0.334	0.343


### **Notes:**


- 1.The C.I.E. 1931 chromaticity diagram (Tolerance ±0.01).
- 2. The products are sensitive to static electricity and care must be fully taken when handling products.


# **CIE Chromaticity Diagram**

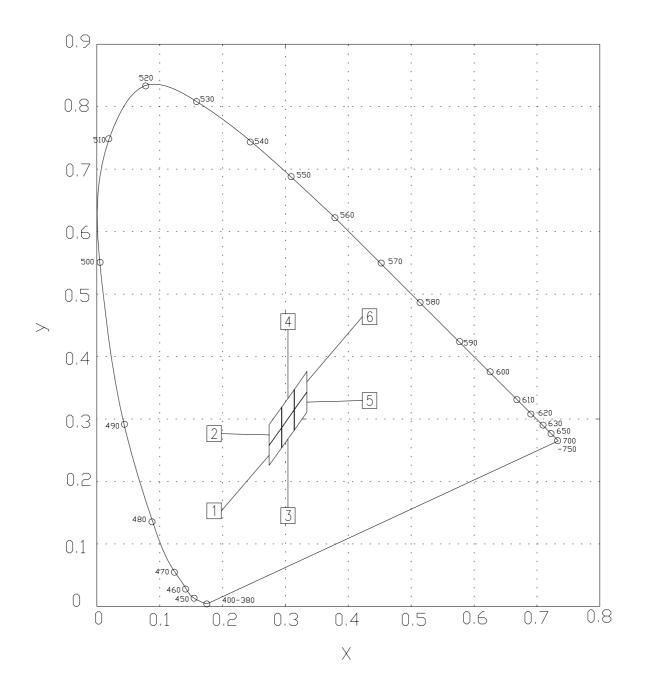



### **Typical Electro-Optical Characteristics Curves**














## Label explanation


**CAT: Luminous Intensity** 

**HUE: Dom. Wavelength** 

**REF: Forward Voltage** 




### **Reel Dimensions**

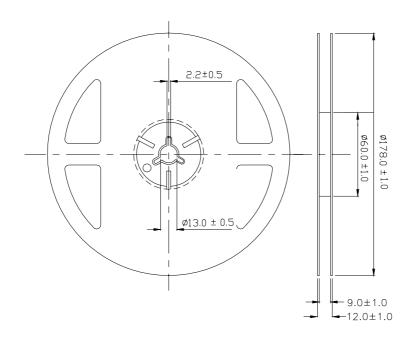


**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

## Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

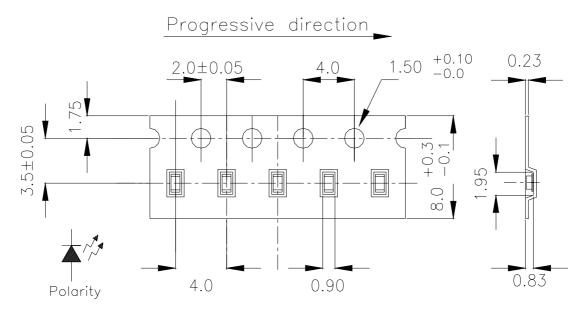

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

### **Moisture Resistant Packaging**

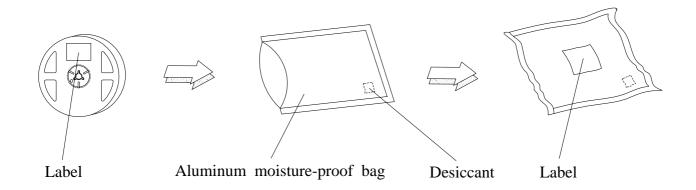



## **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 5 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85%RH	1000 Hrs.	22 PCS.	0/1

### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 60%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
  Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

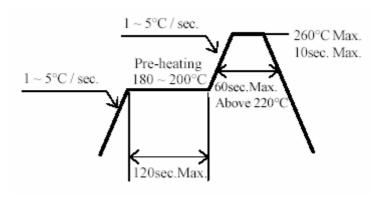

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.




### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

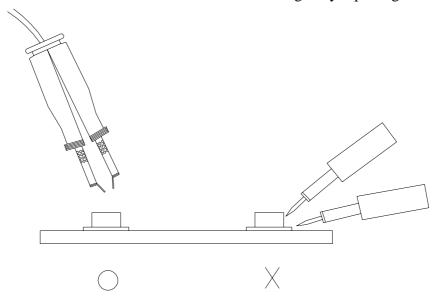

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com