## 4GBJ4005 thru 4GBJ410


## GLASS PASSIVATED BRIDGE RECTIFIERS

REVERSE VOLTAGE FORWARD CURRENT

- 50 to 1000 Volts
- 4.0 Amperes

## **FEATURES**

- ●Surge overload rating -150 amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- The plastic material has UL flammability classification 94V-0
- Mounting postition: Any

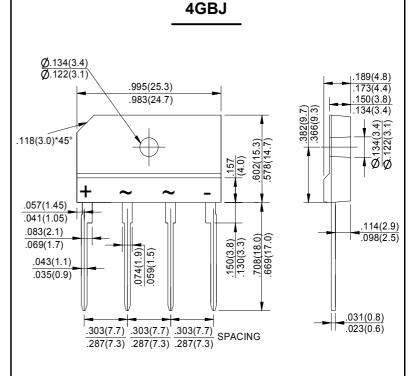

Dimensions in inches and (milimeters)

## **MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

′MBOL √RRM	4GBJ 4005 50	4GBJ 401	4GBJ 402	4GBJ 404	4GBJ	4GBJ	4GBJ	UNIT
+	50				406	408	410	01111
	• •	100	200	400	600	800	1000	V
/RMS	35	70	140	280	420	560	700	V
VDC	50	100	200	400	600	800	1000	V
I(AV)	4.0 2.4							Α
lғsм	120							Α
VF	1.1							V
lR	10.0 500							μA
I <sup>2</sup> t	93							A <sup>2</sup> s
Сл	45							pF
Rөjc	2.2							°C/W
TJ	-55 to +150							$^{\circ}$ C
Тѕтс	-55 to +150							$^{\circ}$
\ III	/DC  (AV)  FSM  VF  IR  I <sup>2</sup> t  CJ  Rejic  TJ	/DC 50  /AV)  FSM  VF  IR  I²t  CJ  Leuc  TJ	/DC 50 100 /AV)	/DC 50 100 200 /AV)  FSM  VF  IR  I <sup>2</sup> t  CJ  29JC  TJ	ADC 50 100 200 400 AU 2.4  FSM 120  VF 1.1 IR 10.0 500 I't 93 CJ 45 EBJC 2.2 TJ -55 to +150	Toc   50   100   200   400   600	ADC 50 100 200 400 600 800  AAV) 2.4  ESM 120  VF 1.1  IR 10.0  500  I²t 93  CJ 45  EBJC 2.2  TJ -55 to +150	Toc   50   100   200   400   600   800   1000

NOTES: 1.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2.Device mounted on 50mm\*50mm\*1.6mm Cu plate heatsink.



