# ULTRA LOW CAPACITANCE MULTI-LINE STEERING DIODE ARRAY



### DESCRIPTION

The PMMAD1108 is a low distortion steering diode. This device is intended for use in high frequency analog or digital data I/O ports for protection against Electrostatic Discharge (ESD) and Electrical Fast Transients (EFT). The PMMAD1108 is connected between rail-to-rail voltage bus or rail-to-ground for clamping and diverting overvoltage transients for the protection of sensitive network interface circuits.

This device provides low capacitance, which insures signal integrity up to 900MHz, while complete isolation between adjacent diodes keeps cross-talk to a minimum. The PMMAD1108 is available in a SO-16 package and meets the IEC 61000-4-2, IEC 61000-4-4 and IEC 61000-4-5 requirements.

### **FEATURES**

- Compatible with IEC 61000-4-2 (ESD): Air 15kV, Contact 8kV
- Compatible with IEC 61000-4-4 (EFT): 40A 5/50ns
- Compatible with IEC 61000-4-5 (Surge): 24A, 8/20µs Level 2(Line-Gnd) & Level 3(Line-Line)
- 500 Milliwatt Continuous Power Dissipation
- Monolithic Design
- ESD Protection > 25 kilovolts
- Protects up to 8 I/O Lines
- Working Voltage > 50 Volts
- Low Leakage Current < 0.1µA
- Low Insertion Loss & Cross-Talk
- Ultra Low Capacitance: 5pF per Diode
- RoHS Compliant
- REACH Compliant


### **MECHANICAL CHARACTERISTICS**


- Molded JEDEC SO-16 Package
- Approximate Weight: 0.15 grams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature: Pure-Tin - Sn, 100: 260-270°C
- 16mm Tape and Reel Per EIA Standard 481
- Flammability Rating UL 94V-0

# APPLICATIONS

- High Frequency Data Lines
- RS-232 & RS-422 Interface Networks
- Ethernet 10/100 Base T
- Computer I/O Ports

# **CIRCUIT DIAGRAM & PIN CONFIGURATION**

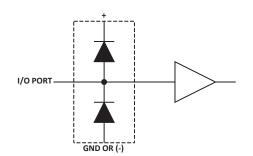





## **TYPICAL DEVICE CHARACTERISTICS**

05090

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified						
PARAMETER	SYMBOL	VALUE	UNITS			
Continuous Power Dissipation	P <sub>PK</sub>	500	Milliwatts			
Continuous Forward Current (Single Diode)	I <sub>P</sub>	400	mA			
Repetitive Peak Forward Current @ tp = 5 $\mu$ s, F = 50kHz	I <sub>FRM</sub>	700	mA			
Operating Temperature	T <sub>A</sub>	-55 to 150	°C			
Storage Temperature	Τ <sub>stg</sub>	-55 to 150	°C			


ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified							
PART NUMBER	REPETITIVE PEAK REVERSE VOLTAGE	MAXIMUM FORWARD PEAK PULSE CURRENT	MAXIMUM FORWARD VOLTAGE	MAXIMUM REVERSE LEAKAGE CURRENT	MAXIMUM CAPACITANCE (Per Diode)		
	@ 10μΑ V <sub>RRM</sub> VOLTS	@ 8/20μs Ι <sub>FM</sub> AMPS	@ 100mA V <sub>F</sub> VOLTS	V <sub>RRM</sub> @ 40V Ι <sub>R</sub> μΑ	@4V, 1MHz C <sub>ي</sub> pF		
PMMAD1108	50	40	1.2	0.1	5		

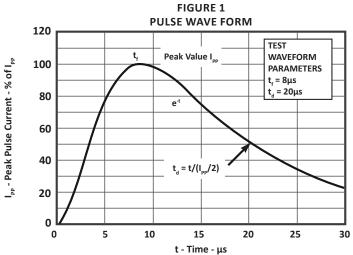

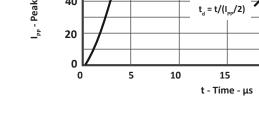

### **SO-16 PACKAGE INFORMATION**

OUTLINE DIMENSIONS						
DIM	MILLIN	<b>IETERS</b>	INCHES			
DIN	MIN	MAX	MIN	MAX		
А	9.80	10.00	0.386	0.393		
В	3.80	4.00	0.150	0.157		
С	1.35	1.75	0.054	0.068		
D	0.35	0.49	0.014	0.019		
F	0.40	1.25	0.016	0.049		
G	1.27 BSC		0.05	BSC		
J	0.18	0.25	0.007	0.009		
К	0.10	0.25	0.004	0.008		
Р	5.80	6.20	0.229	0.244		
R	0.25	0.50	0.010	0.019		

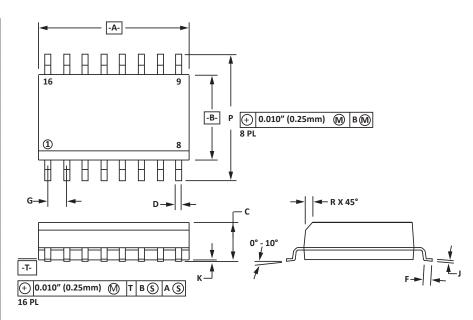

#### NOTES


**J509(** 

1. -T- = Seating plane and datum surface.

- 2. Dimensions "A" and "B" are datum.
- 3. Dimensions "A" and "B" do not include mold protrusion.
- Maximum mold protrusion is 0.015" (0.380mm) per side.
   Dimensioning and tolerances per ANSI Y14.5M, 1982.


6. Dimensions are exclusive of mold flash and metal burrs.


PAD LAYOUT DIMENSIONS						
DIM	MILLIMETERS		INCHES			
			MIN	MAX		
А	1.14	1.40	0.045	0.055		
В	0.64	0.89	0.025	0.035		
С	6.22	-	0.245	-		
D	D 3.94 4.17		0.155	0.165		
E 1.02 1.27 0.040 0.050						
NOTES 1. Controlling dimension: inches.						



### TAPE AND REEL

05090



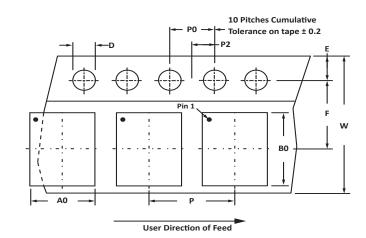

SPECIFICATIONS												
REEL DIA.	TAPE WIDTH	A0	В0	КО	D	E	F	w	PO	P2	Р	tmax
178mm (7")	16mm	6.50 ± 0.10	10.30 ± 0.10	$2.10 \pm 0.10$	$1.50 \pm 0.10$	1.75 ± 0.10	3.50 ± 0.05	16.00 ± 0.30	4.00 ± 0.12	2.00 ± 0.10	$4.00 \pm 0.10$	0.25
<ol> <li>Surface moun</li> <li>Suffix - T7 = 7'</li> </ol>												

Marking on Part - part number, date code, logo and pin one defined by dot on top of package.

Package outline per document number 06007.R3 1/11.

ORDERING INFORMATION							
BASE PART NUMBER	IBER LEADFREE SUFFIX TAPE SUFFIX QTY/REEL REEL SIZE TUBE QTY						
PMMAD1108	-LF	-T7	1,000	7"	48		
PMMAD1108	-LF	-T13	2,500	13"	48		

### COMPANY INFORMATION

### **COMPANY PROFILE**

ProTek Devices, based in Tempe, Arizona USA, is a manufacturer of Transient Voltage Suppression (TVS) products designed specifically for the protection of electronic systems from the effects of lightning, Electrostatic Discharge (ESD), Nuclear Electromagnetic Pulse (NEMP), inductive switching and EMI/RFI. With over 25 years of engineering and manufacturing experience, ProTek designs TVS devices that provide application specific protection solutions for all electronic equipment/systems.

ProTek Devices Analog Products Division, also manufactures analog interface, control, RF and power management products.

#### CONTACT US

### **Corporate Headquarters**

2929 South Fair Lane Tempe, Arizona 85282 USA

#### By Telephone

General: 602-431-8101 Sales: 602-414-5109 Customer Service: 602-414-5114

#### By Fax

General: 602-431-2288

#### By E-mail:

Sales: <u>sales@protekdevices.com</u> Customer Service: <u>service@protekdevices.com</u> Technical Support: <u>support@protekdevices.com</u>

#### Web

www.protekdevices.com www.protekanalog.com

COPYRIGHT © ProTek Devices 2000 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.