


SAW Bandpass Filter 201071C



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

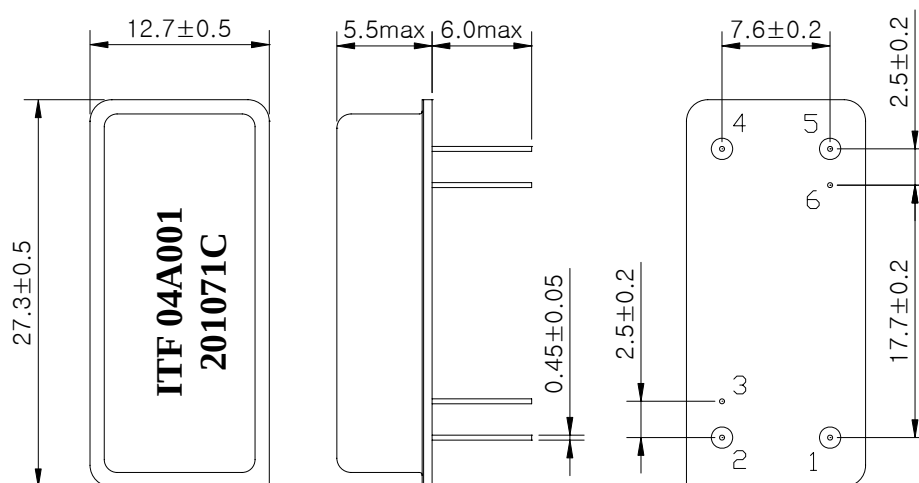

Package : D2712

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201071C
		Rev. Date	2004-06-08
		Rev.	NI2031-CS03 1/5

SAW Bandpass Filter 201071C



3. Specifications

Fo = 70.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	69.96	70.0	70.04
Insertion Loss	dB	-	8.8	12.0
1dB Bandwidth	MHz	-	0.19	-
3dB Bandwidth	MHz	0.25	0.33	-
40dB Bandwidth	MHz	-	1.06	1.20
Amplitude Ripple (Fo +/- 0.05 MHz)	dB	-	0.3	0.6
Group Delay Variation (Fo +/- 0.05 MHz)	nsec	-	100	300
Absolute Delay	usec	-	3.05	-
Temperature Coefficient of Frequency	ppm/°C ²	-	-0.03	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201071C	
		Rev. Date	2004-06-08	
		Rev.	NI2031-CS03	2/5

SAW Bandpass Filter 201071C



4. Matching Schematic

Actual matching values may vary due to PCB layout and parasitics)

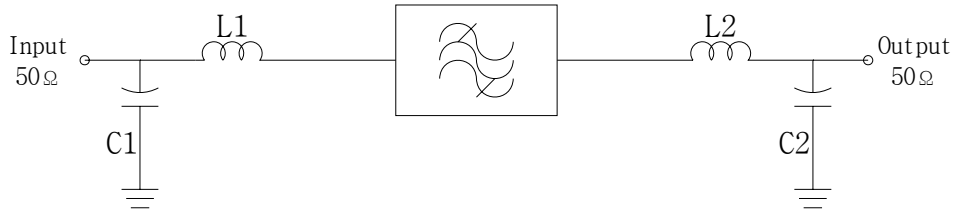

$$L1 = L2 = 220 \text{ nH}$$

$$C1 = 82 \text{ pF},$$

$$C2 = 68 \text{ pF}$$

5. Marking Configuration

ITF¹⁾ 04A001²⁾

201071C³⁾

1) Manufacturer name

2) Lot Number



3) Part Number

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201071C	
		Rev. Date	2004-06-08	
		Rev.	NI2031-CS03	3/5

SAW Bandpass Filter 201071C







6. Typical Performance (at +25℃)

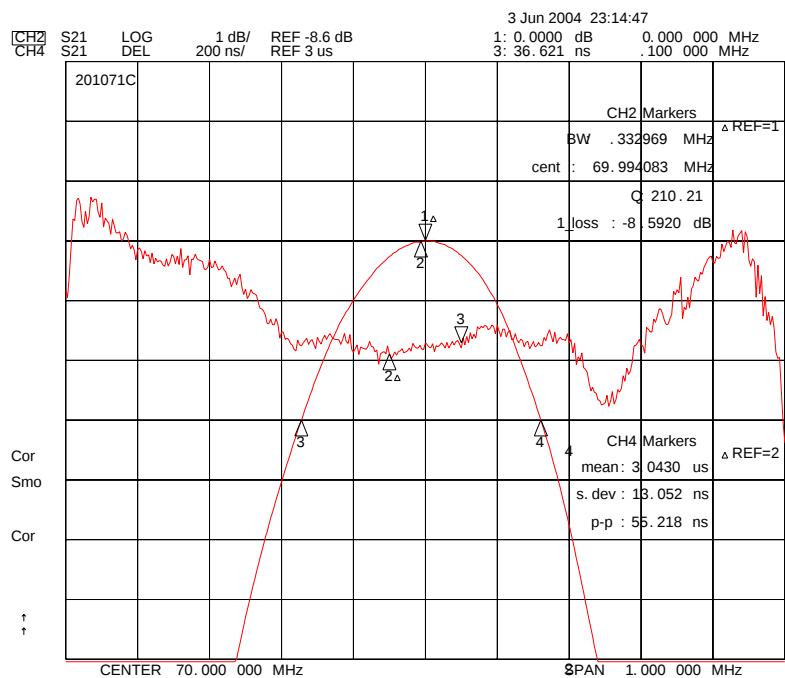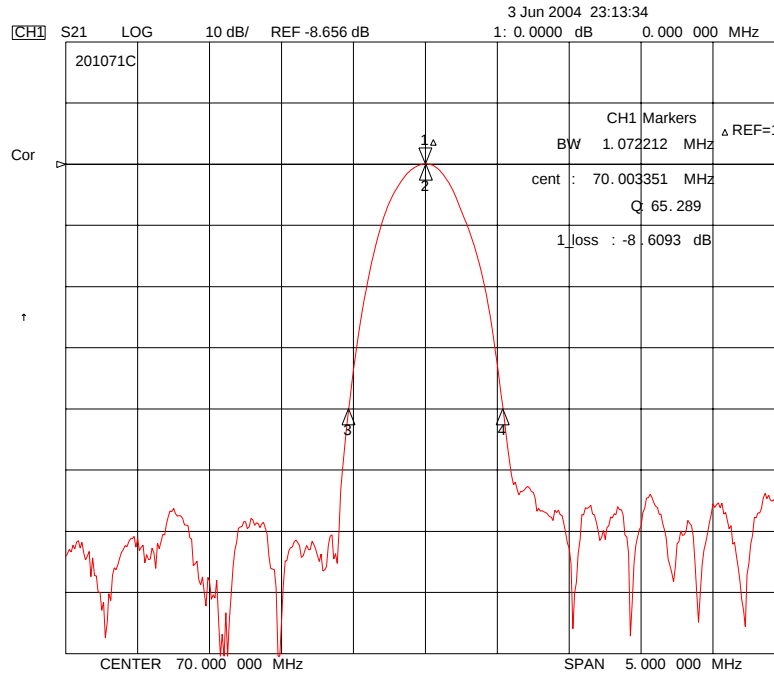

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No.		201071C	
			Rev. Date		2004-06-08	
			Rev.		NI2031-CS03	4/5

SAW Bandpass Filter 201071C

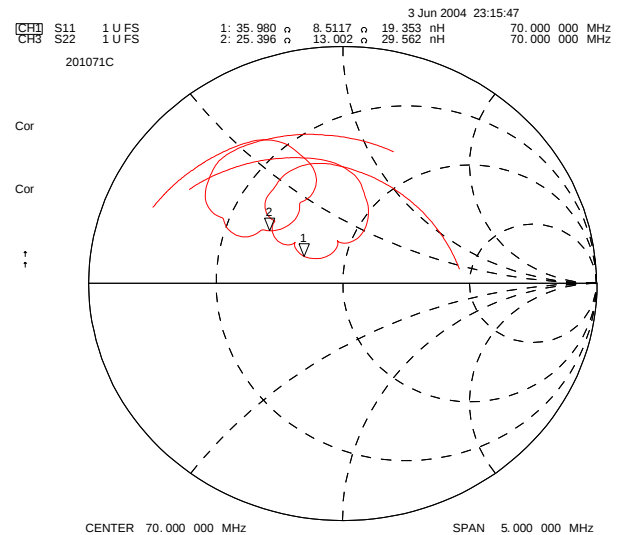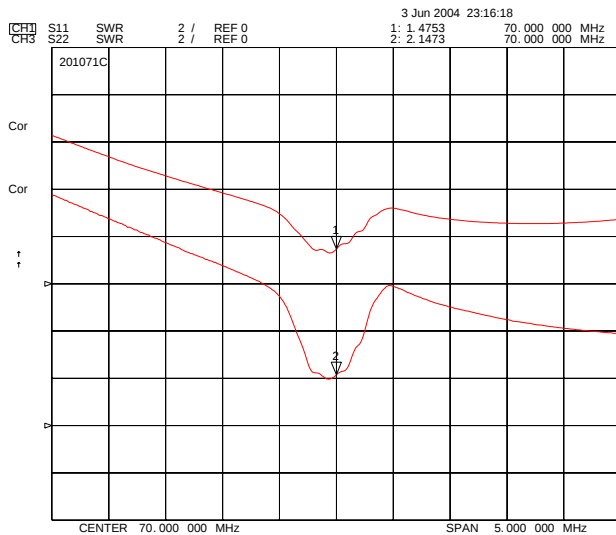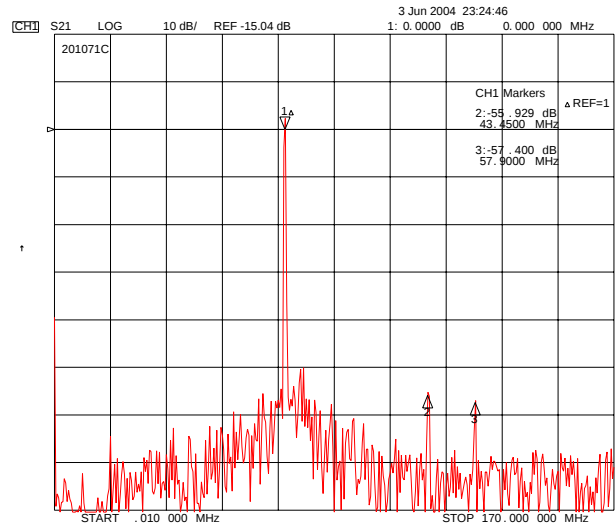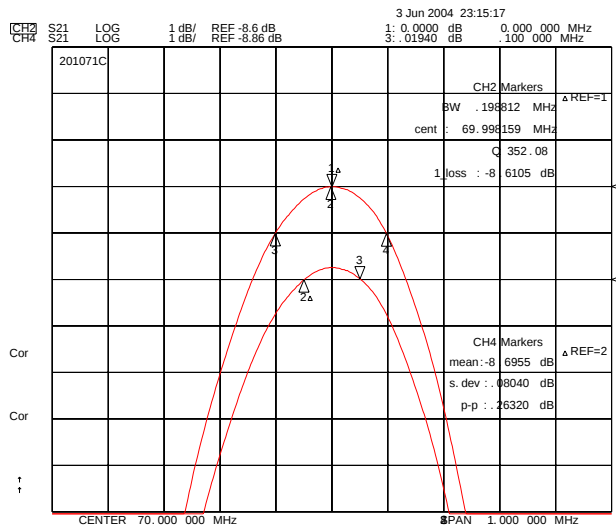

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

201071C

Rev. Date

2004-06-08

Rev.

NI2031-CS03

5/5