
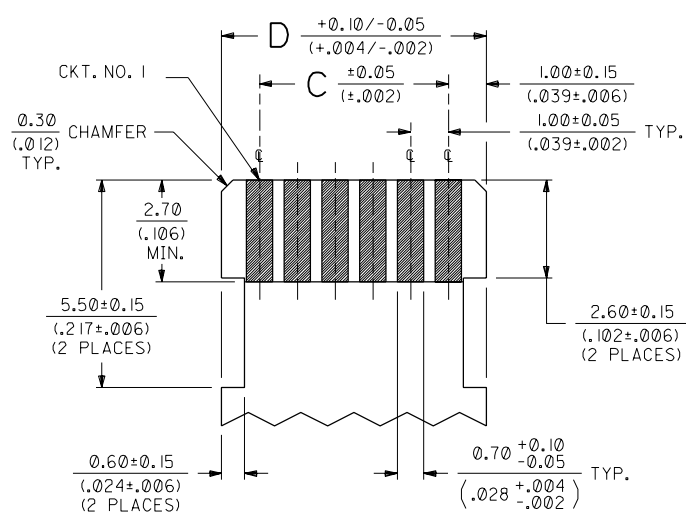




NOTES:

- CONNECTOR MATERIALS:
HOUSING IS MADE OF 4/6 NYLON (COLOR IS NATURAL) AND ACTUATOR IS MADE OF LCP (COLOR IS GREEN), BOTH ARE 30% GLASS-FILLED AND RATED U.L. 94V-0; TERMINALS ARE 0.32/(.013) THICK PHOSPHOR BRONZE.
- TERMINAL PLATING:
5.0 MICRONS/(.000200) MINIMUM 90/10 TIN-LEAD OVER 1.3 MICRONS/(.000050) MINIMUM NICKEL.
- THIS CONNECTOR CONFORMS TO PRODUCT SPECIFICATION PS-71226.
- SEE SHEET 2 FOR CONNECTOR PART NUMBERS, PACKAGING OPTIONS, AND DIMENSIONS NOT SHOWN BELOW.
- DRAWING IS DIMENSIONED METRIC/(INCHES); ALL UNTOLERANCED DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.
- PART IS DESIGNED IN METRIC; DIMENSIONS IN INCHES ARE SHOWN FOR REFERENCE ONLY.

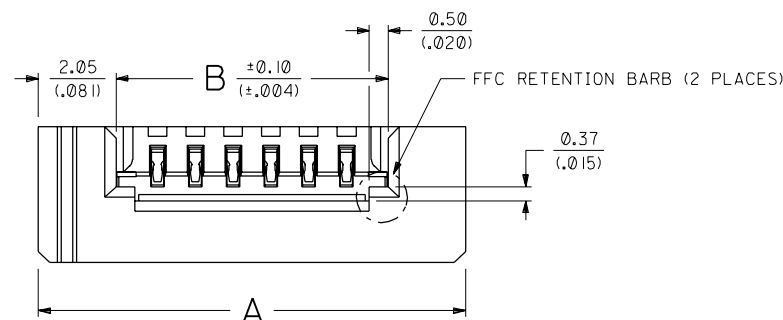

RECOMMENDED FFC DIMENSIONS

FINISHED THICKNESS = 0.30±0.05/(.012±.002)

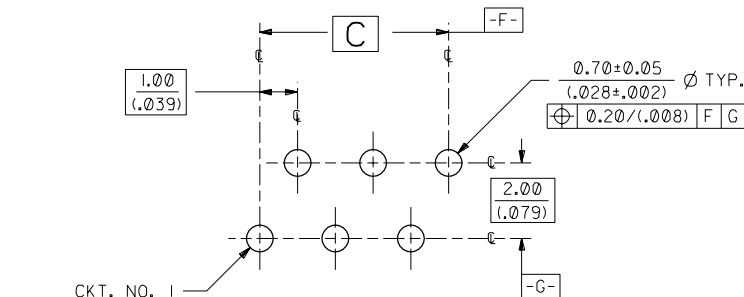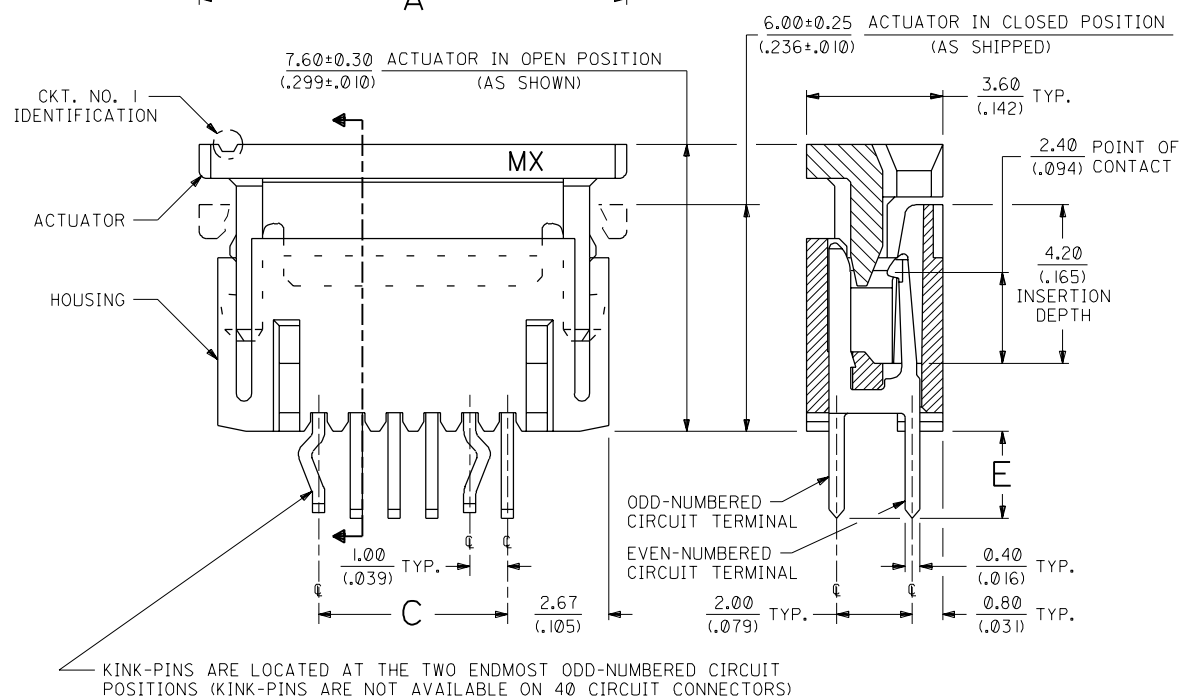

RECOMMENDED PC BOARD LAYOUT

COMPONENT SIDE IS SHOWN

C2		ADD CKT NO.1 NOTE ECN *UDT1999-0014 07/08/98 LAM		B		ADDED PARTS/TUBES PER ECN. *U7-0373 TOMCZAK 96/10/11		DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		▽ = 0 ▽ = 0 REVISE ONLY ON CAD SYSTEM		TITLE 1.00mm/(.039) PITCH, ZIF, FFC CONNECTOR WITH FFC RETENTION BARBS		MOLEX INCORPORATED LISE,ILL. 69532		SHEET NO. 1 OF 2		DATE 12/15/92					
C1		ADD PKG SPEC ECN *UDT1998-0299 05/26/98 LAM		A1		ADDED 40 CIRCUIT PER ECN. *U5-0231 10/10/94 GLT		INCH METRIC 3 PLACE ± .005 2 PLACE ± .01 1 PLACE ± .1		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		PART NO. SEE SHEET 2		DRWG. NO. SD-71226-***1		FILE NAME: SD71226.DGN		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		DIV. CPP		SIZE C	
C		ADDED TOL. & BASIC BOXES PER ECN *U81224 J. LONG 97/11/20		A		REDRAWN & REVISED PER ECN. *U3-0192 02/10/93 GLT		DRAWING BY: GLT CHK'D BY: CAB APP'D: CAB		SCALE: 10 : 1													
LTR.		REVISIONS		LTR.		REVISIONS		LTR.		REVISIONS													

</