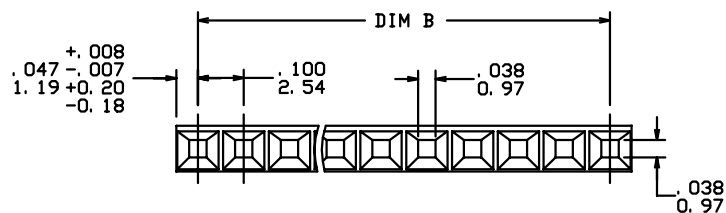
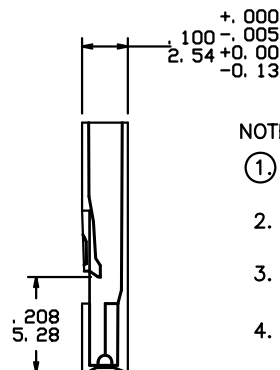
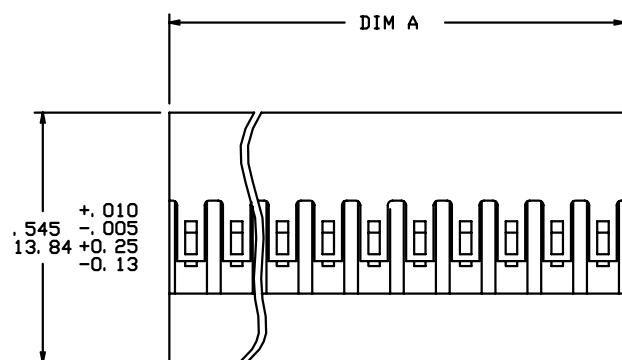


PRODUCT NUMBER
SEE TABLE



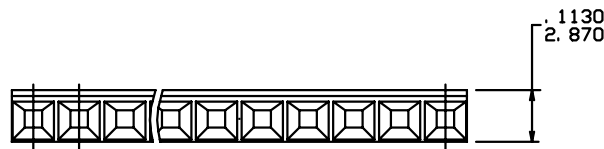
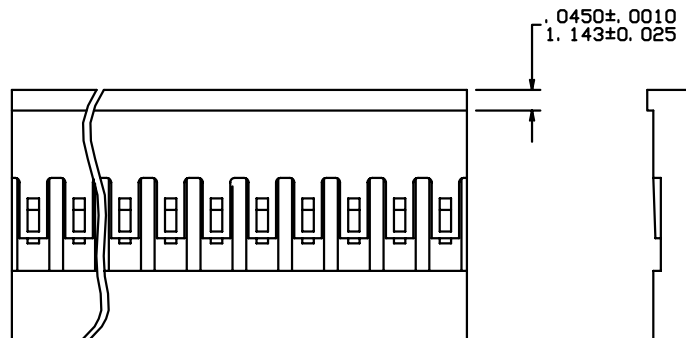
CONFIGURATION 1
(WITHOUT RIB)

NOTES:

- ①. MOLDING MATERIAL: MODIFIED POLYPHENYLENE ETHER, COLOR: BLACK, UL 94V-0.
2. PIN LENGTH TO BE .210/5.33 MIN RECOMMENDED PIN LENGTH IS .225/5.72 ± .015/0.38.
3. FOR TERMINAL APPLICATION SEE TA-531. PRODUCT SPECIFICATION: BUS-12-067.
4. TERMINALS MUST BE CRIMPED PROPERLY FOR SATISFACTORY LATCHING. SEE TA-75 FOR CRIMPING INSTRUCTIONS.
5. THIS HOUSING IS INTENDED FOR USE WITH MINI PTM TERMINAL WITH 22-36 GAUGE WIRE.
- ⑥. ALL MARKING EXCEPT LOGO DONE IN "6 POINT TYPE SET" IF SPACE PERMITS APPROX AREA PER NUMBER/LETTER .056/1.42 WIDE X .06/1.5 HIGH USING WHITE PERMANENT INK.
- ⑦. ALL MARKINGS FOR MILITARY PART NUMBERS ARE TO BE PER MIL-STD-1285. SEE TABULATION.
- ⑧. PLACE DESC P/N AND CAGE NO. ON PACKAGING LABEL. PRODUCT LENGTH IS TOO SMALL TO MARK PART.
- ⑨. THESE PARTS ARE AS MOLDED WITH NO MARKINGS AND NO RESTRICTIONS, (BUT ARE MARKETABLE).
- ⑩. ADD AN LF SUFFIX TO PART NUMBERS FOR PRODUCT THAT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
11. THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO MANUFACTURING SOLDER PROCESS.
- ⑫. STANDARD TOLERANCES:
.XX±.01/.X±.3
.XXX±.005/.XX±.13
.XXXX±.0020/.XXX±.051










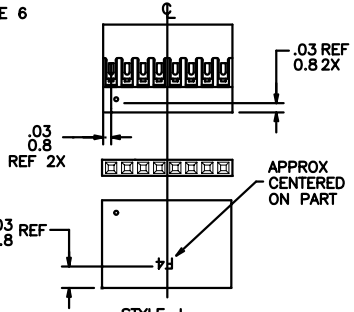
mat'l. code SEE NOTE 1				surface	tolerance	projection	product family PV HOUSINGS			
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM	title			
AW	v50128	GAH	3/14/95	angles	linear		MINI LATCH HOUSING			
AX	v90973	CGC	5/10/99	SEE NOTE 12		scale 3:1	SINGLE ROW .100 [2.54] CC			
AY	v03-1356	PJ	01/31/04	0°±2°			dwg no			
BA	v05-0712	DAI	7/27/05	dr	M. CORNMANN	1/31/90	sheet 1 of 12 size			
BB	v06-0407	HTB	4/26/06	engr	H. SUNDY	1/31/90	65039			
				chr	H. SUNDY	1/31/90	A3			
				appd	H. SUNDY	1/31/90	type Product Customer Drawing			
sheet	revision	BB	BB	BB	BB	BB	BB	BB	BB	BB
index	sheet	1	2	3	4	5	6	7	8	9

PRODUCT NUMBER
SEE TABLE


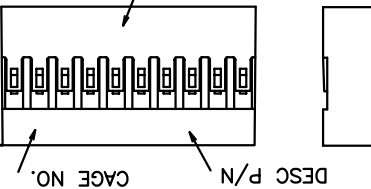
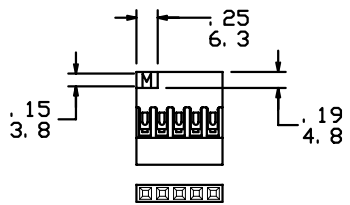


CONFIGURATION 2
(WITH RIB)

mat'l. code SEE NOTE 1				surface	✓	tolerance	projection	product family PV HOUSINGS		
ltr	ec'n no	dr	date	tolerances unless otherwise specified			INCH/MM	title		
BB				angles	linear	SEE NOTE 12		MINI LATCH HOUSING		
				0°±2°			scale 3:1	SINGLE ROW .100 [2.54] CC		
				dr	M. CORNMAN	1/31/90	FCJ	dwg no		
				engr	H. SUNDY	1/31/90		sheet 2 of 12		
				chr	H. SUNDY	1/31/90		65039		
				appd	H. SUNDY	1/31/90		A3		
sheet	revision							type		
index	sheet							Product Customer Drawing		

PRODUCT NO SEE TABLE MARK CO. LOGO TRADEMARK & PART NO. & CAVITY NO. APPROX. AS SHOWN.  STYLE A	MARK CUST NAME AND CAVITY NO. APPROX AS SHOWN.  STYLE D	CO. LOGO, CUSTOMER PART NO. FIRST AND LAST CAVITIES AND EVERY FIFTH CAVITY MARKED PERMANENTLY AND LEGIBLE IN WHITE INK APPROX AS SHOWN.  STYLE G	 STYLE K	
MARK CO. LOGO TRADEMARK & PART NO. & CAVITY NO. APPROX. AS SHOWN.  STYLE B	MARK NUMBERS AS SHOWN CHARACTERS TO BE PERMANENT AND LEGIBLE AFTER REACHING #9 CAVITY CONTINUE ONLY MARKING EVERY OTHER ONE; IE. #11, #13, #15 ETC.  STYLE E	MARK CHARACTERS AS SHOWN (ONE SIDE ONLY) 1,5,10,15, 20,ETC.  STYLE H	MARK CHARACTERS AS SHOWN IN WHITE (ONE SIDE ONLY)  STYLE L	
MARK LETTERS AS SHOWN CHARACTERS TO BE PERMANENT & LEGIBLE. OMIT (I) POS AS SHOWN  STYLE C	MARK ARROW IN WHITE APPROX AS SHOWN.  STYLE F	NOTE 6  STYLE J		

mat'l. code SEE NOTE 1				surface ☒ tolerance		projection 		product family PV HOUSINGS	
lfr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM		title	
BB				angles	linear	SEE NOTE 12		MINI LATCH HOUSING	
				0°±2°				SINGLE ROW .100 [2.54] CC	
				dr	M. CORNMAN	1/31/90	scale 1:1		dwg no
				enr	H. SUNDY	1/31/90	FCI		sheet 3 of 12 size
				chr	H. SUNDY	1/31/90			65039 A3
				appd	H. SUNDY	1/31/90			type
sheet	revision								Product Customer Drawing
index	sheet								

PRODUCT NO SEE TABLE		MARK CHARACTERS ON SIDE OPPOSITE THE LATCHES ON THE PLUGGABLE SQUARE PIN END		MARK AN M (BLACK) IN THE CORNER AS SHOWN, WITH A WHITE BACKGROUND.	
 STYLE M		 SQUARE PIN END STYLE P		 STYLE S	
CAVITY MARKED WITH ARROW		MARK AN M (BLACK) IN THE CORNER AS SHOWN, WITH A WHITE BACKGROUND, ON BOTH SIDES OF THE PART.		 DATE CODE CAGE NO. DESC P/N STYLE T NOTE-7 & 8	
 STYLE N		 STYLE R			

mat'l. code SEE NOTE 1				surface ☒ tolerance		projection 		product family PV HOUSINGS	
ltr	ecr no	dr	date	tolerances unless otherwise specified		INCH/MM		title	
BB				angles	linear	SEE NOTE 12		MINI LATCH HOUSING	
				0°±2°		scale 1:1		SINGLE ROW .100 [2.54] CC	
				dr	M. CORNMAN	1/31/90	FCI		dwg no
				enrg	H. SUNDY	1/31/90			sheet 4 of 12
				chr	H. SUNDY	1/31/90			size
				appd	H. SUNDY	1/31/90			A3
sheet		revision						type	
index		sheet						Product Customer Drawing	



FCIconnect.com

Copyright FCI

PRODUCT NO. NOTE 10	NO.OF POS.	DIM A MAX	DIM B	SPECIAL MARKINGS	CUSTOMER RESTRICTED	CONFIGURATION
65039-001	36	3.600/91.44	3.500/88.90			1
65039-002	35	3.500/88.90	3.400/86.36			
65039-003	34	3.400/86.36	3.300/83.82			
65039-004	33	3.300/83.82	3.200/81.28			
65039-005	32	3.200/81.28	3.100/78.74			
65039-006	31	3.100/78.74	3.000/76.20			
65039-007	30	3.000/76.20	2.900/73.66			
65039-008	29	2.900/73.66	2.800/71.12			
65039-009	28	2.800/71.12	2.700/68.58			
65039-010	27	2.700/68.58	2.600/66.04			
65039-011	26	2.600/66.04	2.500/63.50			
65039-012	25	2.500/63.50	2.400/60.96			
65039-013	24	2.400/60.96	2.300/58.24			
65039-014	23	2.300/58.24	2.200/55.88			
65039-015	22	2.200/55.88	2.100/53.34			
65039-016	21	2.100/53.34	2.000/50.80			
65039-017	20	2.000/50.80	1.900/48.26			
65039-018	19	1.900/48.26	1.800/45.72			
65039-019	18	1.800/45.72	1.700/43.18			
65039-020	17	1.700/43.18	1.600/40.64			
65039-021	16	1.600/40.64	1.500/38.10			
65039-022	15	1.500/38.10	1.400/35.56			
65039-023	14	1.400/35.56	1.300/33.02			
65039-024	13	1.300/33.02	1.200/30.48			
65039-025	12	1.200/30.48	1.100/27.94			
65039-026	11	1.100/27.94	1.000/25.40			
65039-027	10	1.000/25.40	.900/22.86			
65039-028	9	.900/22.86	.800/20.32			
65039-029	8	.800/20.32	.700/17.78			
65039-030	7	.700/17.78	.600/15.24			
65039-031	6	.600/15.24	.500/12.70			
65039-032	5	.500/12.70	.400/10.16			
65039-033	4	.400/10.16	.300/7.62			
65039-034	3	.300/7.62	.200/5.08			
65039-035	2	.200/5.08	.100/2.54			
65039-036	1	.100/2.54				1

mat'l. code SEE NOTE 1				surface ☒ tolerance		projection		product family PV HOUSINGS	
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM		title	
BB				angles	linear			MINI LATCH HOUSING	
				0°±2°		scale 1:1		SINGLE ROW .100 [2.54] CC	
				dr	M. CORNMAN	1/31/90	FCI		dwg no
				engr	H. SUNDY	1/31/90			sheet 5 of 12 size
				chr	H. SUNDY	1/31/90			65039 A3
				appd	H. SUNDY	1/31/90			type Product Customer Drawing
sheet	revision								
index	sheet								



FCIconnect.com

Copyright FCI

MILITARY PRODUCT NO. NOTE 10	MADE FROM	MARKING STYLE	DESC P/N	CAGE NO.	REMARKS
65039-001 -MIL	65039-001	T	86060-36	22526	
↑ -002 ↑	↑ -002 ↑	↑	↑ -35 ↑	↑	
↑ -003 ↑	↑ -003 ↑	↑	↑ -34 ↑	↑	
↑ -004 ↑	↑ -004 ↑	↑	↑ -33 ↑	↑	
↑ -005 ↑	↑ -005 ↑	↑	↑ -32 ↑	↑	
↑ -006 ↑	↑ -006 ↑	↑	↑ -31 ↑	↑	
↑ -007 ↑	↑ -007 ↑	↑	↑ -30 ↑	↑	
↑ -008 ↑	↑ -008 ↑	↑	↑ -29 ↑	↑	
↑ -009 ↑	↑ -009 ↑	↑	↑ -28 ↑	↑	
↑ -010 ↑	↑ -010 ↑	↑	↑ -27 ↑	↑	
↑ -011 ↑	↑ -011 ↑	↑	↑ -26 ↑	↑	
↑ -012 ↑	↑ -012 ↑	↑	↑ -25 ↑	↑	
↑ -013 ↑	↑ -013 ↑	↑	↑ -24 ↑	↑	
↑ -014 ↑	↑ -014 ↑	↑	↑ -23 ↑	↑	
↑ -015 ↑	↑ -015 ↑	↑	↑ -22 ↑	↑	
↑ -016 ↑	↑ -016 ↑	↑	↑ -21 ↑	↑	
↑ -017 ↑	↑ -017 ↑	↑	↑ -20 ↑	↑	
↑ -018 ↑	↑ -018 ↑	↑	↑ -19 ↑	↑	
↑ -019 ↑	↑ -019 ↑	↑	↑ -18 ↑	↑	
↑ -020 ↑	↑ -020 ↑	↑	↑ -17 ↑	↑	
↑ -021 ↑	↑ -021 ↑	↑	↑ -16 ↑	↑	
↑ -022 ↑	↑ -022 ↑	↑	↑ -15 ↑	↑	
↑ -023 ↑	↑ -023 ↑	↑	↑ -14 ↑	↑	
↑ -024 ↑	↑ -024 ↑	↑	↑ -13 ↑	↑	
↑ -025 ↑	↑ -025 ↑	↑	↑ -12 ↑	↑	
↑ -026 ↑	↑ -026 ↑	↑	↑ -11 ↑	↑	
↑ -027 ↑	↑ -027 ↑	↑	↑ -10 ↑	↑	
↑ -028 ↑	↑ -028 ↑	↑	↑ -09 ↑	↑	SEE NOTE 8
↑ -029 ↑	↑ -029 ↑	↑	↑ -08 ↑	↑	
↑ -030 ↑	↑ -030 ↑	↑	↑ -07 ↑	↑	
↑ -031 ↑	↑ -031 ↑	↑	↑ -06 ↑	↑	
↑ -032 ↑	↑ -032 ↑	↑	↑ -05 ↑	↑	
↑ -033 ↑	↑ -033 ↑	↑	↑ -04 ↑	↑	
↑ -034 ↑	↑ -034 ↑	↑	↑ -03 ↑	↑	
↑ -035 ↑	↑ -035 ↑	↑	↑ -02 ↑	↑	
65039-036 -MIL	65039-036	T	86060-01	22526	SEE NOTE 8

mat'l. code SEE NOTE 1				surface ☒ tolerance		projection 		product family PV HOUSINGS	
ltr	ecr no	dr	date	tolerances unless otherwise specified		INCH/MM		title	
BB				angles	linear			MINI LATCH HOUSING	
				0°±2°		scale 1:1		SINGLE ROW .100 [2.54] CC	
				dr	M. CORNMAN	1/31/90			sheet 6 of 12 size
				engr	H. SUNDY	1/31/90			dwg no
				chr	H. SUNDY	1/31/90			65039
				appd	H. SUNDY	1/31/90			A3
sheet	revision							type Product Customer Drawing	
index	sheet								



Copyright FCI

PRODUCT NO NOTE 10	NO.OF POS.	DIM A MAX	DIM B	SPECIAL MARKINGS	CUSTOMER RESTRICTED	CONFIGURATION
65039-037	8	.800/20.32	.700/17.78	STYLE A		1
65039-038	8	.800/20.32	.700/17.78	B		
65039-039	10	1.000/25.40	.900/22.86	C		
65039-040	5	.500/12.70	.400/10.16	C		
65039-041	8	.800/20.32	.700/17.78	D	X	
65039-042	8	.800/20.32	.700/17.78	E		
65039-043	6	.600/15.24	.500/12.70	E		
65039-044	10	1.000/25.40	.900/22.86	A		
65039-045	4	.400/10.16	.300/7.62	A		
65039-046	9	.900/22.86	.800/20.32	A		
65039-047	7	.700/17.78	.600/15.24	A		
65039-048	20	2.000/50.80	1.900/48.26	A		
65039-049	3	.300/7.62	.200/5.08	C		
65039-050	8	.800/20.32	.700/17.78	F		
65039-051	16	1.600/40.64	1.500/38.10	F		
65039-052	20	2.000/50.80	1.900/48.26	F		
65039-053	24	2.400/69.96	2.300/58.24	F		
65039-054	19	1.900/48.26	1.800/45.72	E		
65039-055	33	3.300/83.82	3.200/81.28	E		
65039-056	7	.700/17.78	.600/15.24	E		
65039-057	4	.400/10.16	.300/7.62	F		
65039-058	12	1.200/30.48	1.100/27.94	F		
65039-059	14	1.400/35.56	1.300/33.02	F		
65039-060	6	.600/15.24	.500/12.70	A		
65039-061	2	.200/5.08	.100/2.54	A		
65039-062	2	.200/5.08	.100/2.54	F		
65039-063	10	1.000/25.40	.900/22.86	F		
65039-064	8	.800/20.32	.700/17.78	G	X	
65039-065	13	1.300/33.02	1.200/30.48	A		
65039-066	11	1.100/27.94	1.000/25.40	A		
65039-067	14	1.400/35.56	1.300/33.02	A		
65039-068	21	2.100/53.34	2.000/50.80	A		
65039-069	2	.200/5.08	.100/2.54	C		
65039-070	8	.800/20.32	.700/17.78	C		
65039-071	17	1.700/43.18	1.600/40.64	A		
65039-072	7	.700/17.78	.600/15.24	STYLE H		1

mat'l. code SEE NOTE 1				surface ☒ tolerance		projection 		product family PV HOUSINGS	
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM		title	
BB				angles	linear			MINI LATCH HOUSING	
				0°±2°		scale 1:1		SINGLE ROW .100 [2.54] CC	
				dr	M. CORNMAN	1/31/90	FCI		dwg no
				engr	H. SUNDY	1/31/90			sheet 7 of 12 size
				chr	H. SUNDY	1/31/90			65039 A3
				appd	H. SUNDY	1/31/90			type Product Customer Drawing
sheet	revision								
index	sheet								



FCIconnect.com

Copyright FCI

PRODUCT NO NOTE 10	NO.OF POS.	DIM A MAX	DIM B	SPECIAL MARKINGS	CUSTOMER RESTRICTED	CONFIGURATION
65039-073	32	3.200/81.28	3.100/78.74	STYLE A	X	1
65039-074	3	.300/7.62	.200/5.08	A		
65039-075	16	1.600/40.64	1.500/38.10	E		
65039-076	25	2.500/63.50	2.400/60.96	E		
65039-077	5	.500/12.70	.400/10.16	J	X	
65039-078	24	2.400/69.96	2.300/58.24	A		
65039-079	27	2.700/68.58	2.600/66.04	A		
65039-080	33	3.300/83.82	3.200/81.28	A		
65039-081	29	2.900/73.66	2.800/71.12	A		
65039-082	5	.500/12.70	.400/10.16	A		
65039-083	7	.700/17.78	.600/15.24	K		
65039-084	3	.300/7.62	.200/5.08	E	X	
65039-085	9	.900/22.86	.800/20.32	E	X	
65039-086	11	1.100/27.94	1.000/25.40	E	X	
65039-087	25	2.500/63.50	2.400/60.96	A		
65039-088	15	1.500/38.10	1.400/35.56	A		
65039-089	4	.400/10.16	.300/7.62	C		
65039-090	12	1.200/30.48	1.100/27.94	A		
65039-091	4	.400/10.16	.300/7.62	L		
65039-092	16	1.600/40.64	1.500/38.10	A		
65039-093	18	1.800/45.72	1.700/43.18	A		
65039-094	19	1.900/48.26	1.800/45.72	A		
65039-095	22	2.200/55.88	2.100/53.34	A		
65039-096	23	2.300/58.42	2.200/55.88	A		
65039-097	26	2.600/66.04	2.500/63.50	A		
65039-098	28	2.800/71.12	2.700/68.58	A		
65039-099	30	3.000/76.20	2.900/73.66	A		
65039-100	31	3.100/78.74	3.000/76.20	A		
65039-101	34	3.400/86.36	3.300/83.82	A		
65039-102	35	3.500/88.90	3.400/86.36	A		
65039-103	36	3.600/91.44	3.500/88.90	A		
65039-104	2	.200/5.08	.100/2.54	E		
65039-105	2	.200/5.08	.100/2.54	M		
65039-106	3	.300/7.62	.200/5.08	N		
65039-107	5	.500/12.70	.400/10.16	N		
65039-108	9	.900/22.86	.800/20.32	STYLE F		1

mat'l. code SEE NOTE 1				surface ☒ tolerance		projection 		product family PV HOUSINGS		
ltr	ecr no	dr	date	tolerances unless otherwise specified		INCH/MM		title		
BB				angles	linear	SEE NOTE 12		MINI LATCH HOUSING		
				0°±2°		scale 1:1		SINGLE ROW .100 [2.54] CC		
				dr	M. CORNMAN	1/31/90			sheet 8 of 12 size	
				engr	H. SUNDY	1/31/90			dwg no	65039
				chr	H. SUNDY	1/31/90				A3
				appd	H. SUNDY	1/31/90				
sheet	revision							type Product Customer Drawing		
index	sheet									

PRODUCT NO NOTE 10	NO.OF POS.	DIM A MAX	DIM B	SPECIAL MARKINGS	CUSTOMER RESTRICTED	CONFIGURATION
65039-109	2	.200/5.08	.100/2.54	STYLE P		1
65039-110	5	.500/12.7	.400/10.16	STYLE R		1
65039-111	5	.500/12.7	.400/10.16	STYLE S		1

mat'l. code SEE NOTE 1				surface ☒ tolerance		projection 		product family PV HOUSINGS	
lir	ecr no	dr	date	tolerances unless otherwise specified		INCH/MM		title	
BB				angles	linear	SEE NOTE 12		MINI LATCH HOUSING	
				0'±2"		scale 1:1		SINGLE ROW .100 [2.54] CC	
				dr	M. CORNMAN	1/31/90	FCJ		dwg no
				enr	H. SUNDY	1/31/90			sheet 9 of 12
				chr	H. SUNDY	1/31/90			size
				appd	H. SUNDY	1/31/90			A3
sheet		revision						type	
index		sheet						Product Customer Drawing	

PRODUCT NO NOTE 10	NO.OF POS.	DIM A MAX	DIM B	SPECIAL MARKINGS	CUSTOMER RESTRICTED	CONFIGURATION
65039-201	36	3.600/91.44	3.500/88.90	NOTE 9	NOTE 9	2
65039-202	35	3.500/88.90	3.400/86.36			
65039-203	34	3.400/86.36	3.300/83.82			
65039-204	33	3.300/83.82	3.200/81.28			
65039-205	32	3.200/81.28	3.100/78.74			
65039-206	31	3.100/78.74	3.000/76.20			
65039-207	30	3.000/76.20	2.900/73.66			
65039-208	29	2.900/73.66	2.800/71.12			
65039-209	28	2.800/71.12	2.700/68.58			
65039-210	27	2.700/68.58	2.600/66.04			
65039-211	26	2.600/66.04	2.500/63.50			
65039-212	25	2.500/63.50	2.400/60.96			
65039-213	24	2.400/60.96	2.300/58.24			
65039-214	23	2.300/58.24	2.200/55.88			
65039-215	22	2.200/55.88	2.100/53.34			
65039-216	21	2.100/53.34	2.000/50.80			
65039-217	20	2.000/50.80	1.900/48.26			
65039-218	19	1.900/48.26	1.800/45.72			
65039-219	18	1.800/45.72	1.700/43.18			
65039-220	17	1.700/43.18	1.600/40.64			
65039-221	16	1.600/40.64	1.500/38.10			
65039-222	15	1.500/38.10	1.400/35.56			
65039-223	14	1.400/35.56	1.300/33.02			
65039-224	13	1.300/33.02	1.200/30.48			
65039-225	12	1.200/30.48	1.100/27.94			
65039-226	11	1.100/27.94	1.000/25.40			
65039-227	10	1.000/25.40	.900/22.86			
65039-228	9	.900/22.86	.800/20.32			
65039-229	8	.800/20.32	.700/17.78			
65039-230	7	.700/17.78	.600/15.24			
65039-231	6	.600/15.24	.500/12.70			
65039-232	5	.500/12.70	.400/10.16			
65039-233	4	.400/10.16	.300/7.62			
65039-234	3	.300/7.62	.200/5.08			
65039-235	2	.200/5.08	.100/2.54			
65039-236	1	.100/2.54		NOTE 9	NOTE 9	2

mat'l. code SEE NOTE 1				surface ☒ tolerance		projection 		product family PV HOUSINGS	
ltr	ecr no	dr	date	tolerances unless otherwise specified		INCH/MM		title	
BB				angles	linear			MINI LATCH HOUSING	
				0°±2°		scale 1:1		SINGLE ROW .100 [2.54] CC	
				dr	M. CORNMAN	1/31/90	FCI		dwg no
				engr	H. SUNDY	1/31/90			sheet 10 of 12 size
				chr	H. SUNDY	1/31/90			65039 A3
				appd	H. SUNDY	1/31/90			type
sheet		revision						Product Customer Drawing	
index		sheet							

PRODUCT NO NOTE 10	NO.OF POS.	DIM A MAX	DIM B	SPECIAL MARKINGS	CUSTOMER RESTRICTED	CONFIGURATION
65039-237	8	.800/20.32	.700/17.78	A		2
65039-238	8	.800/20.32	.700/17.78	B		
65039-239	10	1.000/25.40	.900/22.86	C		
65039-240	5	.500/12.70	.400/10.16	C		
65039-241	8	.800/20.32	.700/17.78	D		
65039-242	8	.800/20.32	.700/17.78	E		
65039-243	6	.600/15.24	.500/12.70	E		
65039-244	10	1.000/25.40	.900/22.86	A		
65039-245	4	.400/10.16	.300/7.62	A		
65039-246	9	.900/22.86	.800/20.32	A		
65039-247	7	.700/17.78	.600/15.24	A		
65039-248	20	2.000/50.80	1.900/48.26	A		
65039-249	3	.300/7.62	.200/5.08	C		
65039-250	8	.800/20.32	.700/17.78	F		
65039-251	16	1.600/40.64	1.500/38.10	F		
65039-252	20	2.000/50.80	1.900/48.26	F		
65039-253	24	2.400/60.96	2.300/58.24	F		
65039-254	19	1.900/48.26	1.800/45.72	E		
65039-255	33	3.300/83.82	3.200/81.28	E		
65039-256	7	.700/17.78	.600/15.24	E		
65039-257	4	.400/10.16	.300/7.62	F		
65039-258	12	1.200/30.48	1.100/27.94	F		
65039-259	14	1.400/35.56	1.300/33.02	F		
65039-260	6	.600/15.24	.500/12.70	A		
65039-261	2	.200/5.08	.100/2.54	A		
65039-262	2	.200/5.08	.100/2.54	F		
65039-263	10	1.000/25.40	.900/22.86	F		
65039-264	8	.800/20.32	.700/17.78	G		
65039-265	13	1.300/33.02	1.200/30.48	A		
65039-266	11	1.100/27.94	1.000/25.40	A		
65039-267	14	1.400/35.56	1.300/33.02	A		
65039-268	21	2.100/53.34	2.000/50.80	A		
65039-269	2	.200/5.08	.100/2.54	C		
65039-270	8	.800/20.32	.700/17.78	C		
65039-271	17	1.700/43.18	1.600/40.64	A		
65039-272	7	.700/17.78	.600/15.24	H		
65039-273	32	3.200/81.28	3.100/78.74	A		
65039-274	3	.300/7.62	.200/5.08	A		
65039-275	16	1.600/40.64	1.500/38.10	E		
65039-276	25	2.500/63.50	2.400/60.96	E		
65039-277	5	.500/12.70	.400/10.16	J		2

mat'l. code SEE NOTE 1				surface ☒ tolerance		projection 		product family PV HOUSINGS	
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM		title	
BB				angles	linear			MINI LATCH HOUSING	
				0°±2°		scale 1:1		SINGLE ROW .100 [2.54] CC	
				dr	M. CORNMAN	1/31/90	FCI		dwg no
				engr	H. SUNDY	1/31/90			sheet 11 of 12
				chr	H. SUNDY	1/31/90			size
				appd	H. SUNDY	1/31/90			A3
sheet	revision							type Product Customer Drawing	
index	sheet								



FCJconnect.com

Copyright FCJ

form A3

PRODUCT NO NOTE 10	NO.OF POS.	DIM A MAX	DIM B	SPECIAL MARKINGS	CUSTOMER RESTRICTED	CONFIGURATION
65039-278	24	2.400/60.96	2.300/58.24	A		2
65039-279	27	2.700/68.58	2.600/66.04	A		
65039-280	33	3.300/83.82	3.200/81.28	A		
65039-281	29	2.900/73.66	2.800/71.12	A		
65039-282	5	.500/12.70	.400/10.16	A		
65039-283	7	.700/17.78	.600/15.24	K		
65039-284	3	.300/7.62	.200/5.08	E		
65039-285	9	.900/22.86	.800/20.32	E		
65039-286	11	1.100/27.94	1.000/25.40	E		
65039-287	25	2.500/63.50	2.400/60.96	A		
65039-288	15	1.500/38.10	1.400/35.56	A		
65039-289	4	.400/10.16	.300/7.62	C		
65039-290	12	1.200/30.48	1.100/27.94	A		
65039-291	4	.400/10.16	.300/7.62	L		
65039-292	16	1.600/40.64	1.500/38.10	A		
65039-293	18	1.800/45.72	1.700/43.18	A		
65039-294	19	1.900/48.26	1.800/45.72	A		
65039-295	22	2.200/55.88	2.100/53.34	A		
65039-296	23	2.300/58.24	2.200/55.88	A		
65039-297	26	2.600/66.04	2.500/63.50	A		
65039-298	28	2.800/71.12	2.700/68.58	A		
65039-299	30	3.000/76.20	2.900/73.66	A		
65039-300	31	3.100/78.74	3.000/76.20	A		
65039-301	34	3.400/86.36	3.300/83.82	A		
65039-302	35	3.500/88.90	3.400/86.36	A		
65039-303	36	3.600/91.44	3.500/88.90	A		
65039-304	2	.200/5.08	.100/2.54	E		
65039-305	2	.200/5.08	.100/2.54	M		
65039-306	3	.300/7.62	.200/5.08	N		
65039-307	5	.500/12.70	.400/10.16	N		
65039-308	9	.900/22.86	.800/20.32	F		2

mat'l. code SEE NOTE 1				surface ☒ tolerance		projection 		product family PV HOUSINGS		
ltr	ec'n no	dr	date	tolerances unless otherwise specified		INCH/MM		title		
BB				angles	linear			MINI LATCH HOUSING		
				0°±2°		scale 1:1		SINGLE ROW .100 [2.54] CC		
				dr	M. CORNMAN	1/31/90			sheet 12 of 12 size	
				engr	H. SUNDY	1/31/90			dwg no	
				chr	H. SUNDY	1/31/90			65039 A3	
				appd	H. SUNDY	1/31/90			type Product Customer Drawing	
sheet	revision			index	sheet					

PDM: Rev:BB

STATUS:Released

Printed: Jun 13, 2006