
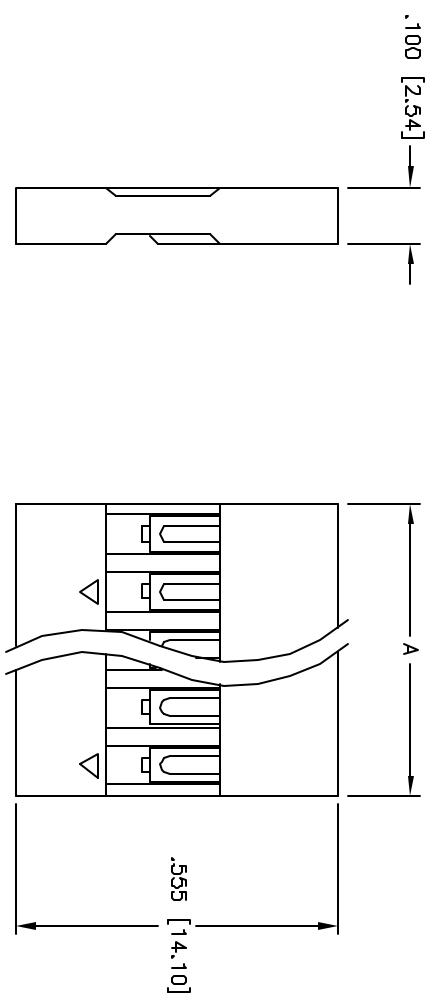


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/05	

APPROVED: _____
 DATE: _____ TITLE: _____

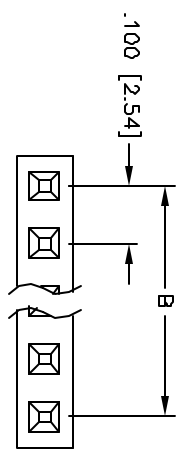

Positions: 2 thru 40
 A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces

SPECIFICATIONS:
 Material:
 Insulator: PBT, glass reinforced, UL94V-2
 Insulator color: Black
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Insulation resistance: 5,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -65°C to +105°C
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NICHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	± .010
MM	± .10
Ø	± .015
Ø	± .010
Ø	± .010
Ø	± .010
Ø	± .010
Ø	± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

CRIMP CONTACT HOUSING

DRAWN	SS	DATE	4/7/05	SIZE	PART NO.	SCALE	MTE:XX	REV.
CHECKED				X				-
APPROVED				REF:				

6 5 4 3 2 1