


Features

- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- For General Purpose Switching Applications
- High Conductance

Mechanical Data

- Case: SOT-23, Molded Plastic
- Case Material - UL Flammability Rating Classification 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: See Diagram
- Marking: KA9 (See Page 2)
- Weight: 0.008 grams (approx.)
- Ordering Information, see Sheet 3

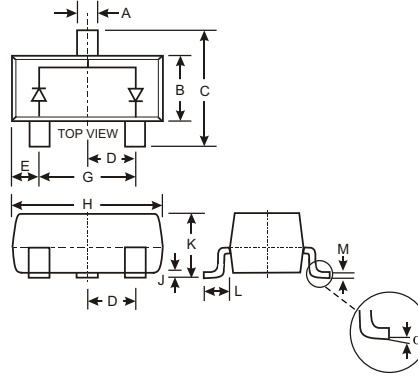

SOT-23		
Dim	Min	Max
A	0.37	0.51
B	1.20	1.40
C	2.30	2.50
D	0.89	1.03
E	0.45	0.60
G	1.78	2.05
H	2.80	3.00
J	0.013	0.10
K	0.903	1.10
L	0.45	0.61
M	0.85	0.80
	0	8
All Dimensions in mm		

Maximum Ratings @ T_A = 25 C unless otherwise specified

Characteristic	Symbol	MMBD2004S	Unit
Repetitive Peak Reverse Voltage	V _{RRM}	300	V
Working Peak Reverse Voltage	V _{RWM}	240	V
DC Blocking Voltage	V _R		V
RMS Reverse Voltage	V _{R(RMS)}	170	V
Forward Continuous Current (Note 2)	I _{FM}	225	mA
Peak Repetitive Forward Current (Note 2)	I _{FRM}	625	mA
Non-Repetitive Peak Forward Surge Current @ t = 1.0 s @ t = 1.0s	I _{FSM}	4.0 1.0	A
Power Dissipation (Note 2)	P _d	350	mW
Thermal Resistance Junction to Ambient Air (Note 2)	R _{JA}	357	C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +150	C

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 1)	V _{(BR)R}	300		V	I _R = 100 A
Forward Voltage (Note 1)	V _F		0.87 1.0	V	I _F = 20mA I _F = 100mA
Reverse Current (Note 1)	I _R		100	nA A	V _R = 240V V _R = 240V, T _J = 150 C
Total Capacitance	C _T		5.0	pF	V _R = 0, f = 1.0MHz
Reverse Recovery Time	t _{rr}		50	ns	I _F = I _R = 30mA, I _{rr} = 3.0mA, R _L = 100

- Notes:
1. Short duration test pulse used to minimize self-heating effect.
 2. Part mounted on FR-4 board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.

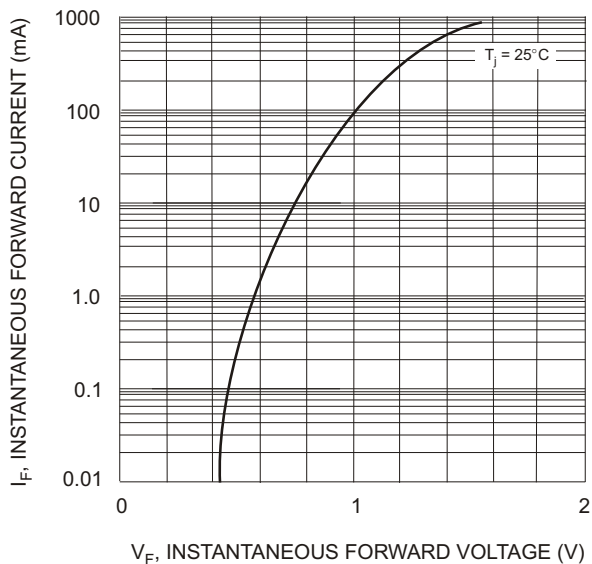


Fig. 1 Forward Characteristics

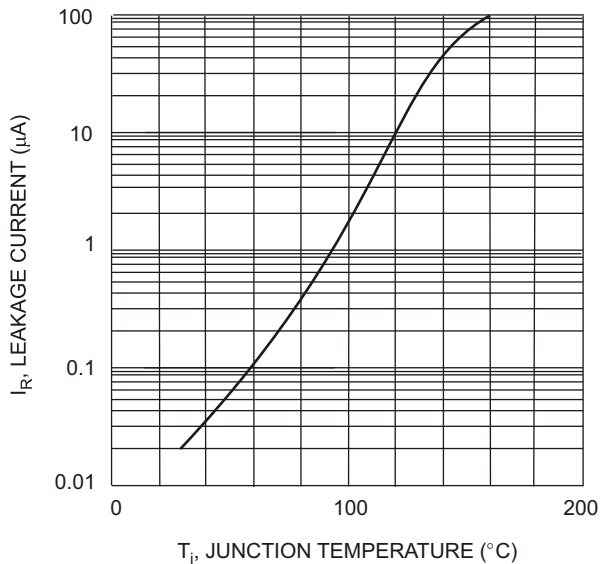


Fig. 2 Leakage Current vs Junction Temperature

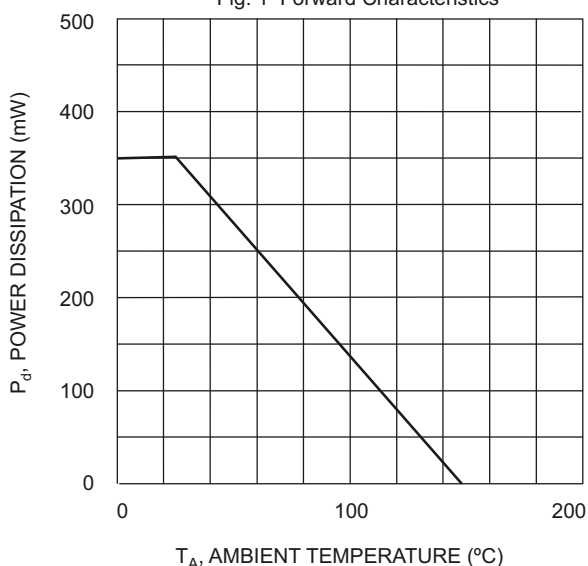



Fig. 3 Power Dissipation Derating

Ordering Information (Note 3)

Device	Packaging	Shipping
MMBD2004S-7	SOT-23	3000/Tape & Reel

Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information

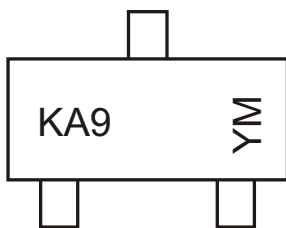

KA9 = Product Type Marking Code
 YM = Date Code Marking
 Y = Year ex: N = 2002
 M = Month ex: 9 = September

Date Code Key

Year	2001	2002	2003	2004	2005	2006
Code	M	N	P	R	S	T

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D