


Variable Capacitance Diode

Description

The 1T407 is a variable capacitance diode designed for electronic tuning of wide-band CATV tuners using a super-small-miniature flat package (SSVC).

Features

- Super-small-miniature flat package
- Low series resistance: 1.1 Ω Max. (f=470 MHz)
- Large capacitance ratio: 15.5 Typ. (C<sub>2</sub>/C<sub>25</sub>)  
21.5 Min. (C<sub>1</sub>/C<sub>28</sub>)  
1.03 Min. (C<sub>25</sub>/C<sub>28</sub>)
- Small leakage current: 10 nA Max. (V<sub>R</sub>=28 V)
- Capacitance deviation in a matching group:  
within 2 %

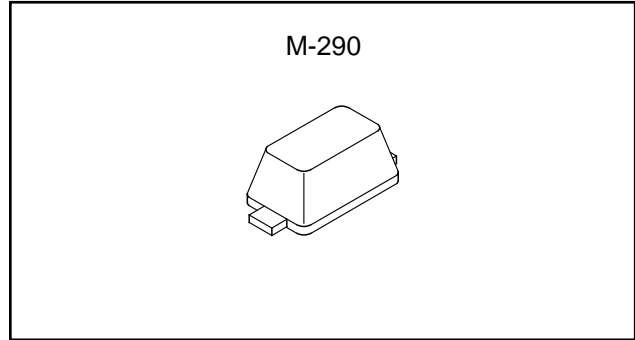

Absolute Maximum Ratings (Ta=25 °C)

- Reverse voltage V<sub>R</sub> 34 V
- Operating temperature T<sub>opr</sub> -20 to +75 °C
- Storage temperature T<sub>stg</sub> -65 to +150 °C

Applications

Electronic tuning of wide-band CATV tuners

Structure

Silicon epitaxial planar type diode


Electrical Characteristics

(Ta=25 °C)


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse current	I <sub>R</sub>	V <sub>R</sub> =28 V			10	nA
Reverse voltage	V <sub>R</sub>	I <sub>R</sub> =1 μA	34			V
Diode capacitance	C <sub>2</sub>	V <sub>R</sub> =2 V, f=1 MHz	42.86		50.96	pF
	C <sub>25</sub>	V <sub>R</sub> =25 V, f=1 MHz	2.56		2.99	pF
Capacitance ratio	C <sub>2</sub> /C <sub>25</sub>		14.5	15.5		
	C <sub>1</sub> /C <sub>28</sub>		21.5			
	C <sub>25</sub> /C <sub>28</sub>		1.03			
Series resistance	r <sub>s</sub>	C <sub>D</sub> =14 pF, f=470 MHz			1.1	Ω
Capacitance deviation in a matching group	ΔC	V <sub>R</sub> =1 to 28 V, f= MHz			2	%

Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.


Diode capacitance vs. Reverse voltage

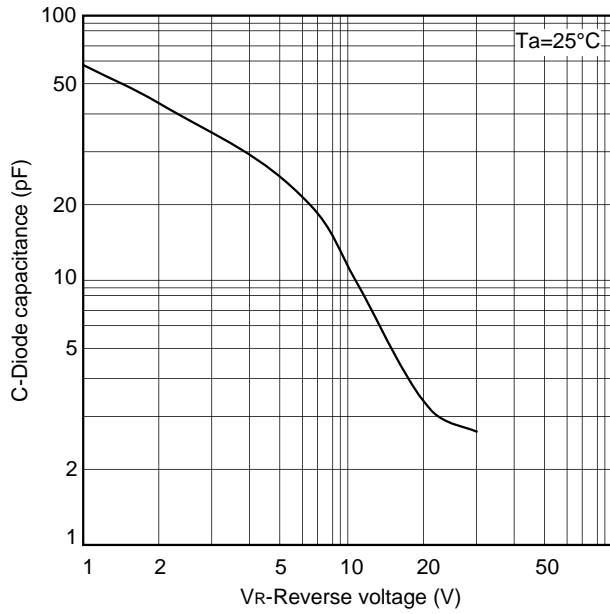


Reverse current vs. Ambient temperature



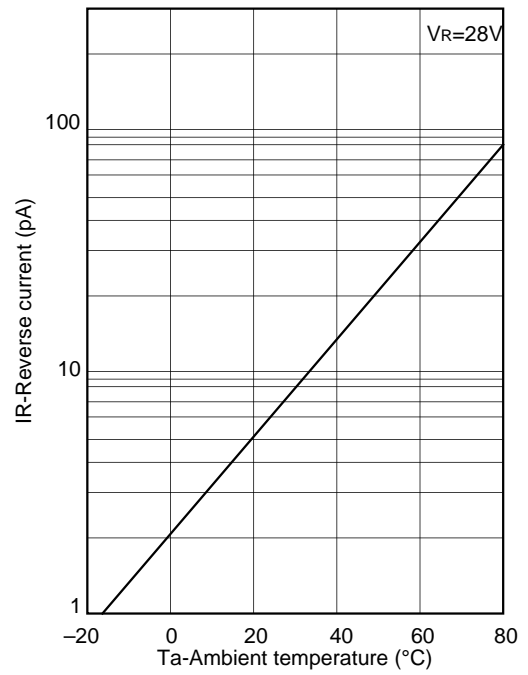


Forward voltage vs. Ambient temperature

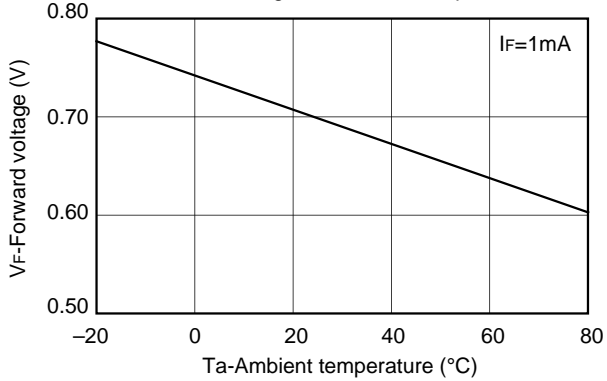


Reverse voltage vs. Ambient temperature

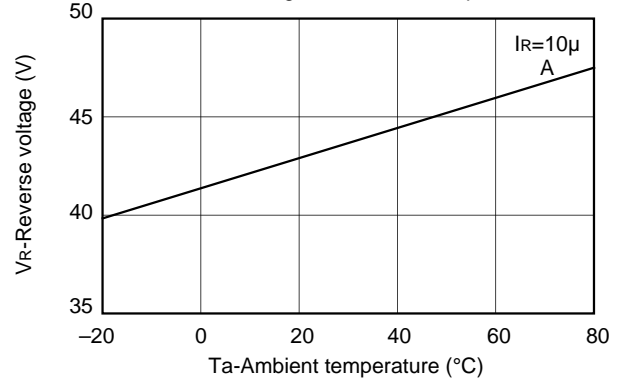

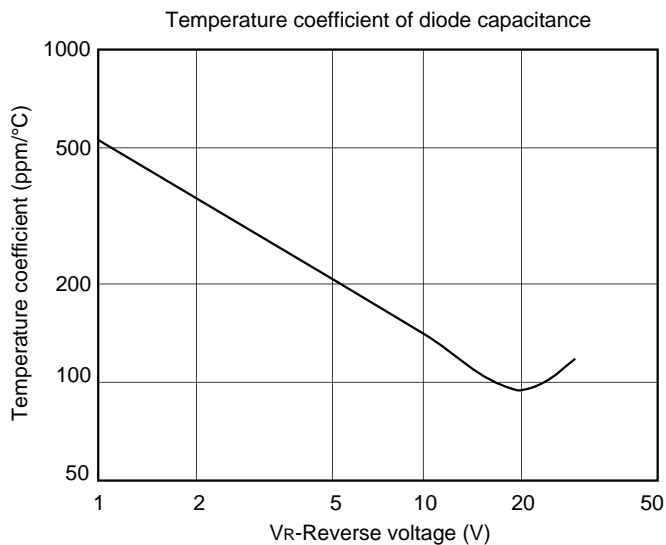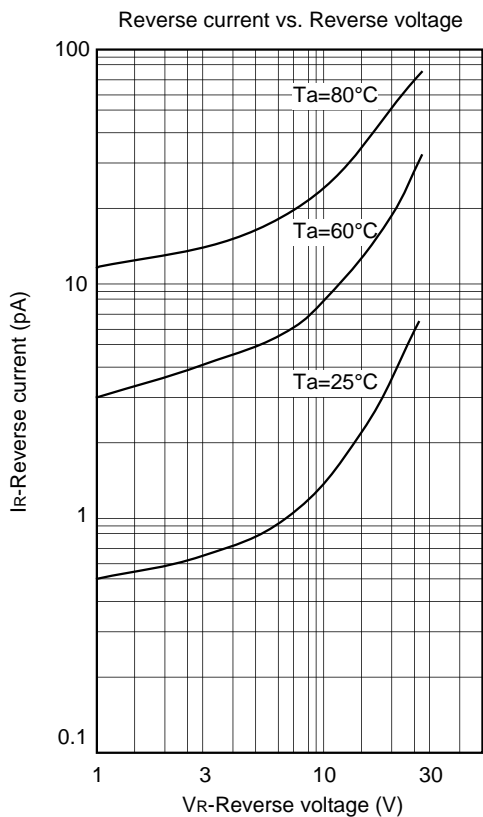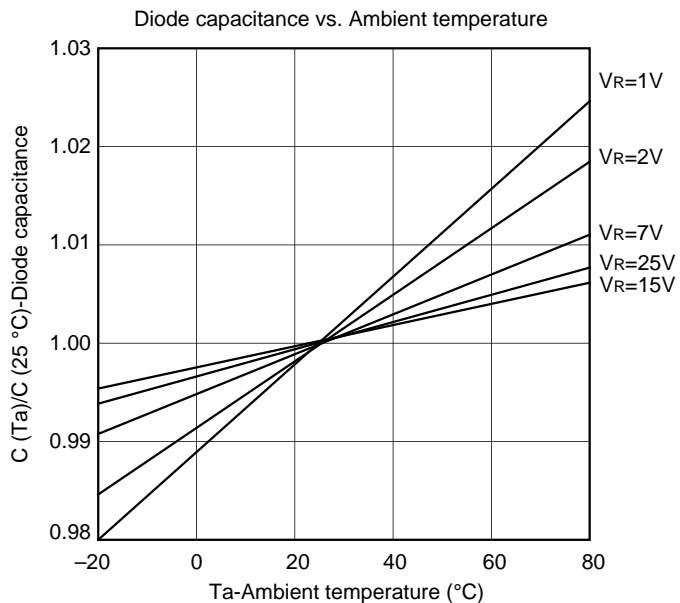

Package Outline Unit : mm


M-290

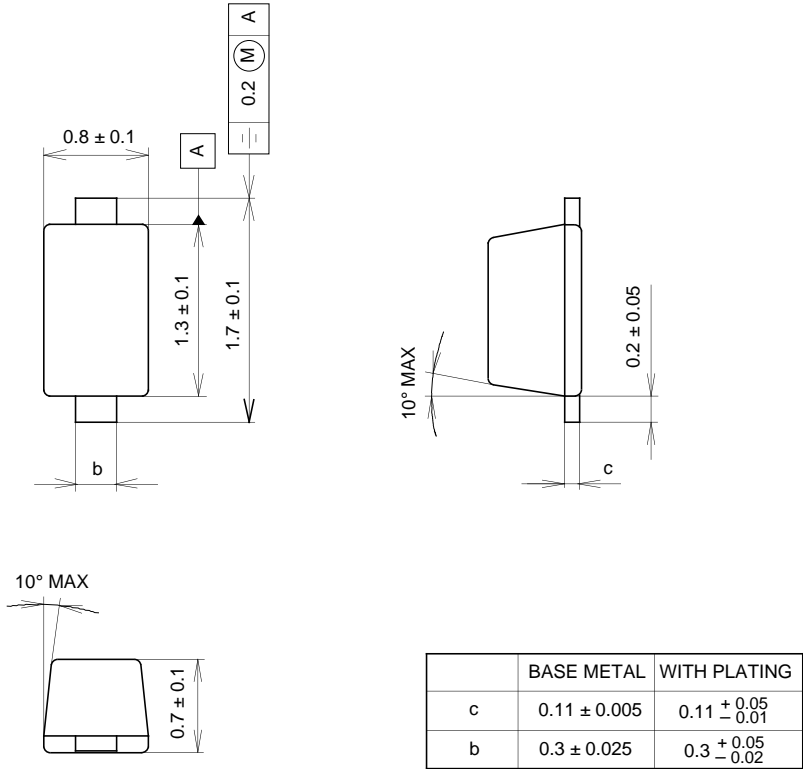

SONY CODE	M-290
EIAJ CODE	_____
JEDEC CODE	_____

PACKAGE MATERIAL	EPOXY RESIN
LEAD TREATMENT	SOLDER PLATING
LEAD MATERIAL	COPPER
PACKAGE WEIGHT	0.002g

Mark

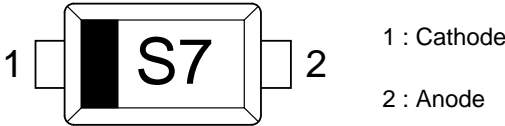

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.