



# SRA2020 - SRA20150

## 20.0 AMPS. Schottky Barrier Rectifiers


### TO-220AC

## Features

- ✧ Low power loss, high efficiency.
- ✧ High current capability, Low VF.
- ✧ High reliability
- ✧ High surge current capability.
- ✧ Epitaxial construction.
- ✧ Guard-ring for transient protection.
- ✧ For use in low voltage, high frequency inventor, free wheeling, and polarity protection application

## Mechanical Data

- ✧ Cases: TO-220AC molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Terminals: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: As marked
- ✧ High temperature soldering guaranteed: 260°C/10 seconds.25",(6.35mm) from case.
- ✧ Weight: 2.24 grams

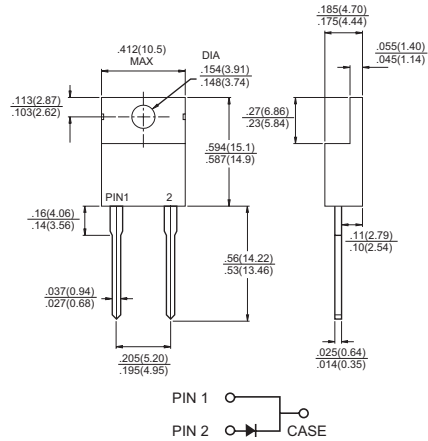

Dimensions in inches and (millimeters)

## Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SRA 2020	SRA 2030	SRA 2040	SRA 2050	SRA 2060	SRA 2090	SRA 20100	SRA 20150	Units	
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	90	100	150	V	
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	63	70	105	V	
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	90	100	150	V	
Maximum Average Forward Rectified Current See Fig. 1	$I_{(AV)}$	20								A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )	$I_{FSM}$	300								A	
Maximum Instantaneous Forward Voltage @20A	$V_F$	0.55		0.70		0.92		1.02		V	
Maximum D.C. Reverse Current @ $T_c=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_c=100^\circ\text{C}$	$I_R$	0.5					0.1				mA
		15		10		5.0				mA	
Typical Thermal Resistance (Note)	$R_{\theta JC}$	1.5								°C/W	
Operating Junction Temperature Range	$T_J$	-65 to +125				-65 to +150				°C	
Storage Temperature Range	$T_{STG}$	-65 to +150									°C

Notes: Mounted on Heatsink Size of 2" x 3" x 0.25" Al-Plate.

## RATINGS AND CHARACTERISTIC CURVES (SRA2020 THRU SRA20150)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

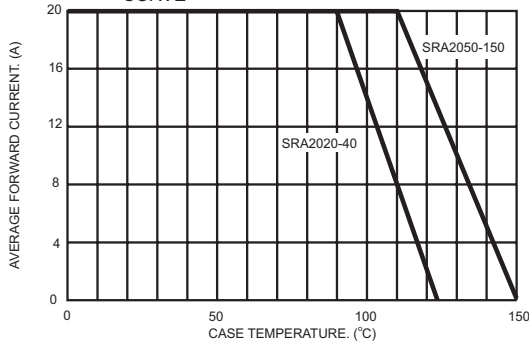


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

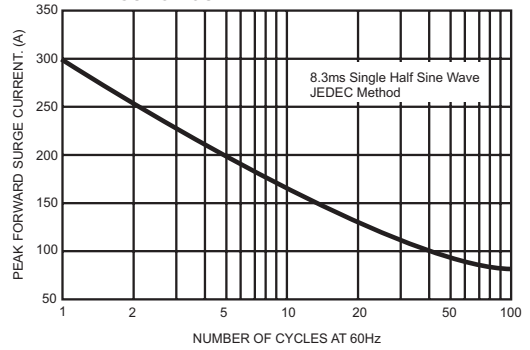


FIG.3- TYPICAL FORWARD CHARACTERISTICS

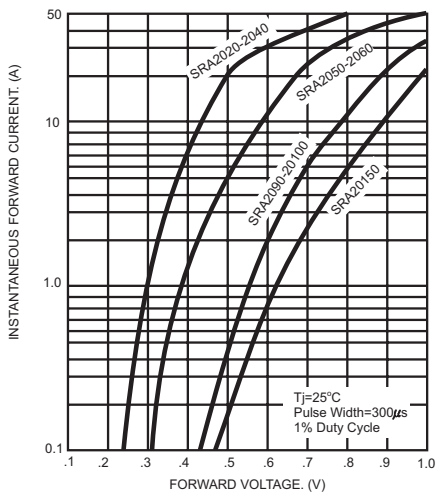


FIG.4- TYPICAL REVERSE CHARACTERISTICS

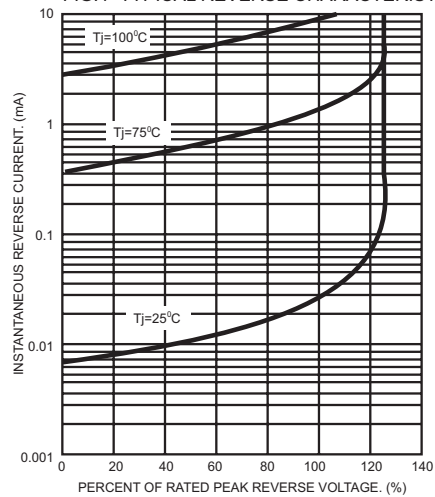


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

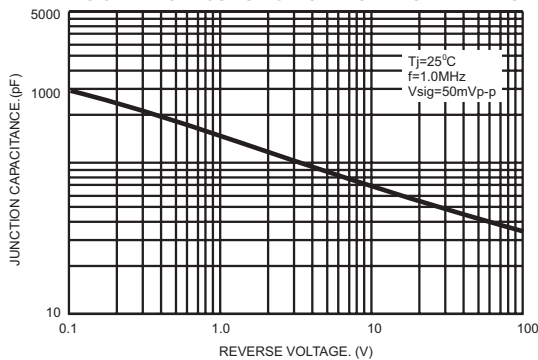


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

