



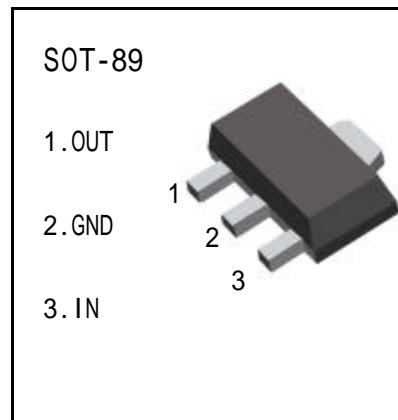
SOT-89 Encapsulate Three Terminal Voltage Regulator

CJ78L05 Three-terminal positive voltage regulator**FEATURES**

Maximum Output current

 I_{OM} : 0.1 A

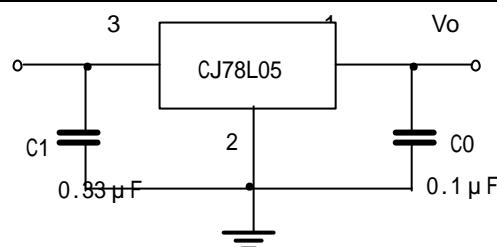
Output voltage

 V_o : 5 V**ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)**

Parameter	Symbol	Value	Units
Input Voltage	V_i	30	V
Operating Junction Temperature Range	T_{OPR}	0—+125	
Storage Temperature Range	T_{STG}	-55—+150	

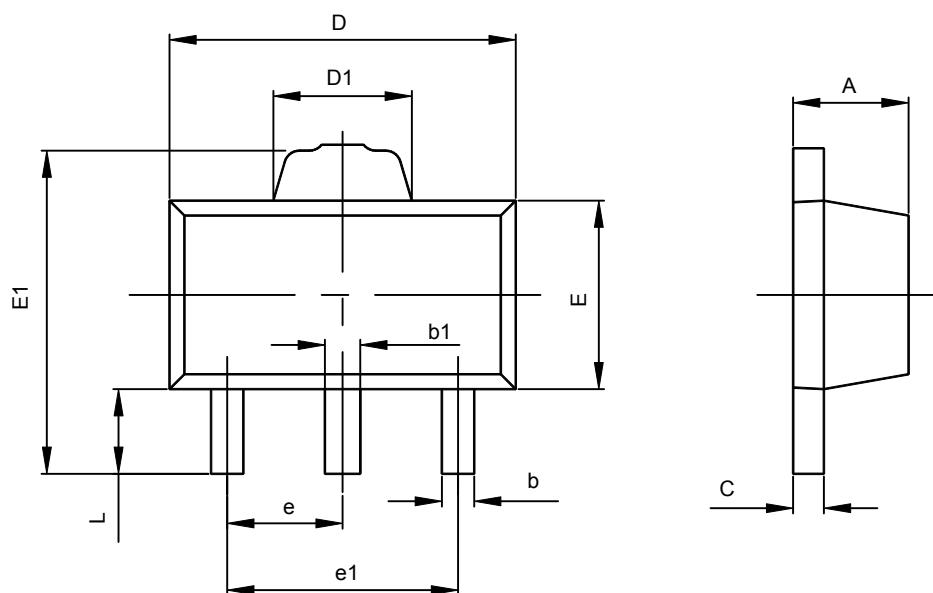
ELECTRICAL CHARACTERISTICS(VI=10V, I_o =40mA, 0 < T_j < 125, $C_1=0.33 \mu F$, $C_0=0.1 \mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	$T_j=25$	4.8	5.0	5.2	V
		7V V_i 20V, $I_o=1mA-40mA$	4.75	5.0	5.25	V
		7V V_i V_{MAX} , $I_o=1mA-70mA$	4.75	5.0	5.25	V (note)
Load Regulation	V_o	$T_j=25$, $I_o=1mA-100mA$	11	60	60	mV
		$T_j=25$, $I_o=1mA-40mA$	5.0	30	30	mV
Line regulation	V_o	7V V_i 20V, $T_j=25$	32	150	150	mV
		8V V_i 20V, $T_j=25$	26	100	100	mV
Quiescent Current	I_q	25		3.8	6	mA
Quiescent Current Change	I_q	8V V_i 20V			1.5	mA
		1mA I_o 40mA			0.1	mA
Output Noise Voltage	V_n	10Hz f 100KHz		42		uV
Ripple Rejection	RR	8V V_i 18V, f=120Hz, $T_j=25$	41	80		dB
Dropout Voltage	V_d	$T_j=25$		1.7		V

TYPICAL APPLICATION

Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

SOT-89-3L PACKAGE OUTLINE DIMENSIONS



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.360	0.560	0.014	0.022
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.400	1.800	0.055	0.071
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500TYP		0.060TYP	
e1	2.900	3.100	0.114	0.122
L	0.900	1.100	0.035	0.043