

LED DOT MATRIX

BL-M23X881

■ Features:

- 60.20mm (2.3") F 5.0 dot matrix LED display.
- Low current operation.
- Excellent character appearance.
- Easy mounting on P.C. Boards or sockets.
- I.C. Compatible.
- ROHS Compliance.



Super Bright

Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=20mA)

Part No		Chip			VF Unit:V		IV TYP.(mcd)
Row Cathode Column Anode	Row Anode Column Cathode	Emitted Color	Material	IP (nm)	Typ	Max	
BL-M23E881S-XX	BL-M23F881S-XX	Hi Red	GaAlAs/GaAs,SH	660	1.85	2.20	280
BL-M23E881D-XX	BL-M23F881D-XX	Super Red	GaAlAs/GaAs,DH	660	1.85	2.20	310
BL-M23E881UR-XX	BL-M23F881UR-XX	Ultra Red	GaAlAs/GaAs,DDH	660	1.85	2.20	450
BL-M23E881E-XX	BL-M23F881E-XX	Orange	GaAsP/GaP	635	2.10	2.50	220
BL-M23E881Y-XX	BL-M23F881Y-XX	Yellow	GaAsP/GaP	585	2.10	2.50	220
BL-M23E881G-XX	BL-M23F881G-XX	Green	GaP/GaP	570	2.20	2.50	250

Ultra Bright

Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=20mA)

Part No		Chip			VF Unit:V		IV TYP.(mcd)
Row Cathode Column Anode	Row Anode Column Cathode	Emitted Color	Material	IP (nm)	Typ	Max	
BL-M23E881UHR-XX	BL-M23F881UHR-XX	Ultra Red	AlGaInP	645	2.10	2.50	450
BL-M23E881UE-XX	BL-M23F881UE-XX	Ultra Orange	AlGaInP	630	2.10	2.50	255
BL-M23E881YO-XX	BL-M23F881YO-XX	Ultra Amber	AlGaInP	619	2.10	2.50	255
BL-M23E881UY-XX	BL-M23F881UY-XX	Ultra Yellow	AlGaInP	590	2.10	2.50	255
BL-M23E881UG-XX	BL-M23F881UG-XX	Ultra Green	AlGaInP	574	2.20	2.50	380
BL-M23E881PG-XX	BL-M23F881PG-XX	Ultra Pure Green	InGaIn	525	3.80	4.50	560
BL-M23E881B-XX	BL-M23F881B-XX	Ultra Blue	InGaIn	470	2.70	4.20	270
BL-M23E881W-XX	BL-M23F881W-XX	Ultra White	InGaIn	/	2.70	4.20	350

--XX: Surface / Lens color :

Number	0	1	2	3	4	5
Ref Surface Color	White	Black	Gray	Red	Green	
Epoxy Color	Water clear	White diffused	Red Diffused	Green Diffused	Yellow Diffused	

LED DOT MATRIX

BL-M23X881

Absolute maximum ratings (Ta=25°C)

Parameter		S	D	UR	E	Y	G	Unit
Forward Current I_F		25	25	25	25	25	30	mA
Power Dissipation P_d		60	60	60	60	60	65	mW
Reverse Voltage V_R		5	5	5	5	5	5	V
Peak Forward Current I_{PF} (Duty 1/10 @1KHZ)		150	150	150	150	150	150	mA
Operation Temperature T_{OPR}	-40 to +80							°C
Storage Temperature T_{STG}	-40 to +85							°C
Lead Soldering Temperature T_{SOL}	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)							°C


■ Absolute maximum ratings (Ta=25°C)

Parameter	UHR	UE	YO	UY	UG	PG	B	W	Unit
Forward Current I_F	30	30	30	30	30	30	30	30	mA
Power Dissipation P_d	75	65	65	65	75	110	120	120	mW
Reverse Voltage V_R	5	5	5	5	5	5	5	5	V
Peak Forward Current I_{PF} (Duty 1/10 @1KHZ)	150	150	150	150	150	150	100	100	mA
Operation Temperature T_{OPR}	-40 to +80								°C
Storage Temperature T_{STG}	-40 to +85								°C
Lead Soldering Temperature T_{SOL}	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)								°C







LED DOT MATRIX

BL-M23X881

Typical electrical-optical characteristics curves:

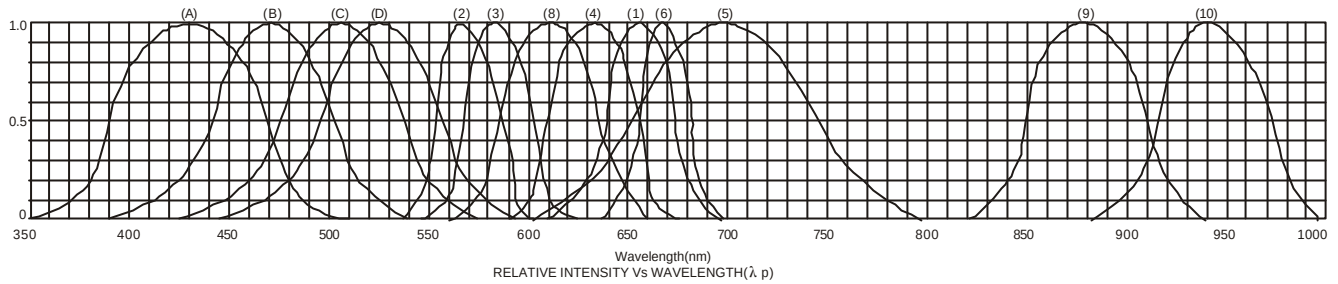

- | | |
|---|--------------------------------------|
| (1) - GaAsP/GaAs 655nm/Red | (9) - GaAlAs 880nm |
| (2) - GaP 570nm/Yellow Green | (10) - GaAs/GaAs & GaAlAs/GaAs 940nm |
| (3) - GaAsP/GaP 585nm/Yellow | (A) - GaN/SiC 430nm/Blue |
| (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red | (B) - InGaN/SiC 470nm/Blue |
| (5) - GaP 700nm/Bright Red | (C) - InGaN/SiC 505nm/Ultra Green |
| (6) - GaAlAs/GaAs 660nm/Super Red | (D) - InGaAl/SiC 525nm/Ultra Green |
| (8) - GaAsP/GaP 610nm/Super Red | |

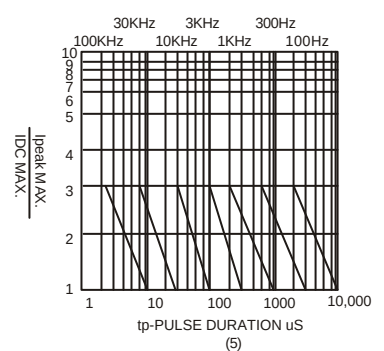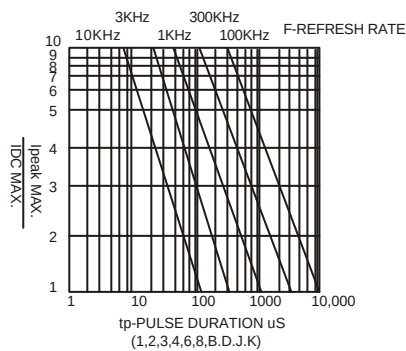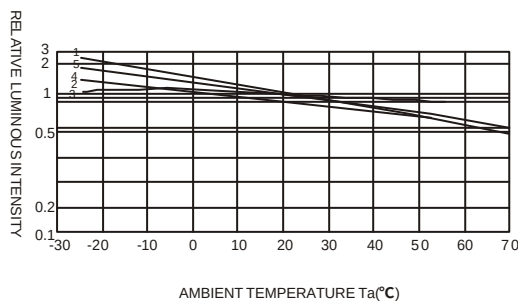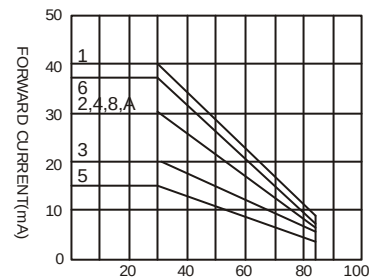

NOTE: 25°C free air temperature unless otherwise specified