

# High Precision Bulk Metal® Foil Surface Mount Voltage Divider, TCR Tracking of $< 0.5 \text{ ppm}/^\circ\text{C}$ , Tolerance Match of $0.01 \%$ and Stability of $\pm 0.005 \%$ (50 ppm)



Any value at any ratio available within resistance range

## INTRODUCTION

Bulk Metal® Foil Technology out-performs all other resistor technologies available today for applications that require High Precision and High Stability.

This technology has been invented, patented and pioneered by Vishay. Products based on this technology are the most suitable for a wide range of applications.

BMF technology allows to produce customer oriented products designed to satisfy challenging and specific technical requirements. Model DSM offers Low TCR (both absolute and tracking), Excellent Load Life Stability, Tight tolerance, Excellent Ratio Stability, and Low Current Noise, all in one package.

The DSM surface mount divider provides a matched pair of Bulk Metal® Foil Resistors in a small epoxy molded package. The electrical specification of this integrated construction offers improved performance and better real estate utilization over discrete resistors and matched pairs.

Our Application Engineering Department is available to advise and make recommendations. For non-standard technical requirements and special applications, please contact us.


## FEATURES

- Temperature Coefficient of Resistance (TCR): Absolute:  $\pm 2 \text{ ppm}/^\circ\text{C}$  typical (-55 °C to +125 °C, +25 °C Ref.) Tracking:  $0.5 \text{ ppm}/^\circ\text{C}$  typical
- Tolerance: Absolute:  $\pm 0.02 \%$ ; Match:  $0.01 \%$
- Power Rating at 70 °C: Entire Package: 0.1 W Each Resistor: 0.05 W
- Ratio Stability:  $0.005 \%$  (0.05 W at 70 °C, 2000 hours)
- Resistance Range: 100  $\Omega$  to 20 k $\Omega$  per resistor
- Large Variety of Resistance Ratios: 1:200
- Electrostatic Discharge (ESD) above 25 000 Volts
- Short Time Overload  $\leq 0.005 \%$
- Non Inductive, Non Capacitive Design
- Rise Time: 1.0 ns without ringing
- Current Noise:  $< -40 \text{ dB}$
- Voltage Coefficient:  $< 0.1 \text{ ppm}/\text{V}$
- Non Inductive:  $< 0.08 \mu\text{H}$
- Non Hot Spot Design
- Terminals: silver coated copper alloy
- Any value available within resistance range (e.g. 1K2345)
- Prototype samples available from 48 hours. For more information, please contact [foil@vishay.com](mailto:foil@vishay.com)
- For better performances, please see DSMZ datasheet (Z-Foil)




RoHS\*  
COMPLIANT

**FIGURE 1 - SCHEMATIC**

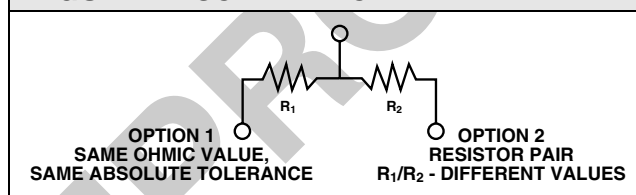

## APPLICATIONS

- Instrumentation amplifiers
- Bridge networks
- Differential amplifiers
- Ratio arms in bridge circuits
- Medical and test equipment
- Military
- Airborne etc.




**TABLE 1 - MODEL DSM SPECIFICATIONS**

MODEL	ABSOLUTE TCR (-55 °C TO +125 °C, +25 °C REF.) TYPICAL + MAX. SPREAD	RESISTANCE RATIO	TCR TRACKING	TOLERANCE	
				ABSOLUTE	MATCH
DSM	$\pm 2 \text{ ppm}/^\circ\text{C} \pm 3 \text{ ppm}/^\circ\text{C}$	$R1/R2 = 1$	$1.0 \text{ ppm}/^\circ\text{C}$	$\pm 0.02 \%$	$0.01 \%$
		$1 < R1/R2 \leq 10$	$2.0 \text{ ppm}/^\circ\text{C}$	$\pm 0.05 \%$	$0.02 \%$
		$10 < R1/R2 \leq 200$	$3.0 \text{ ppm}/^\circ\text{C}$	$\pm 0.1 \%$	$0.05 \%$


\* Pb containing terminations are not RoHS compliant, exemptions may apply

Vishay Foil Resistors High Precision Bulk Metal® Foil Surface Mount Voltage Divider, TCR Tracking of  $\leq 0.5 \text{ ppm}/^\circ\text{C}$ , Tolerance Match of  $0.01 \%$  and Stability of  $\pm 0.005 \%$  (50 ppm)


**FIGURE 2 - POWER DERATING CURVE**

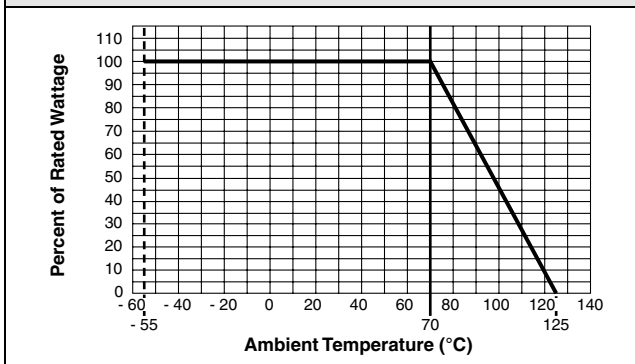


**FIGURE 3 - RECOMMENDED LAND**

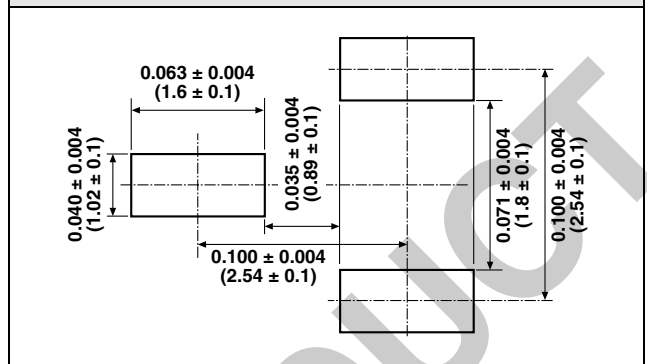


**FIGURE 4 - TRIMMING TO VALUES**  
(Conceptual Illustration)

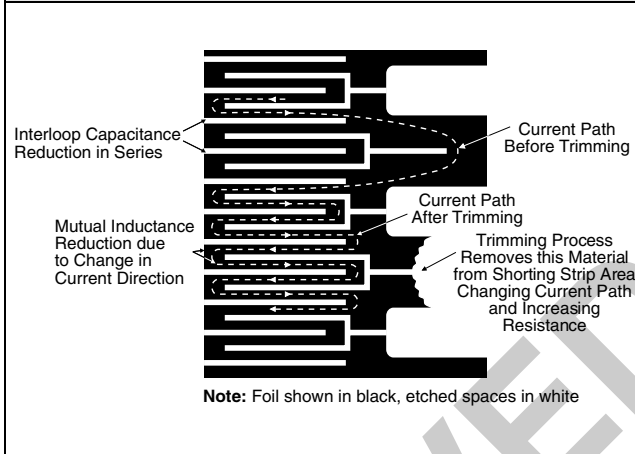

**FIGURE 5 - TYPICAL TCR CURVE**  
(For more details, see table 1)

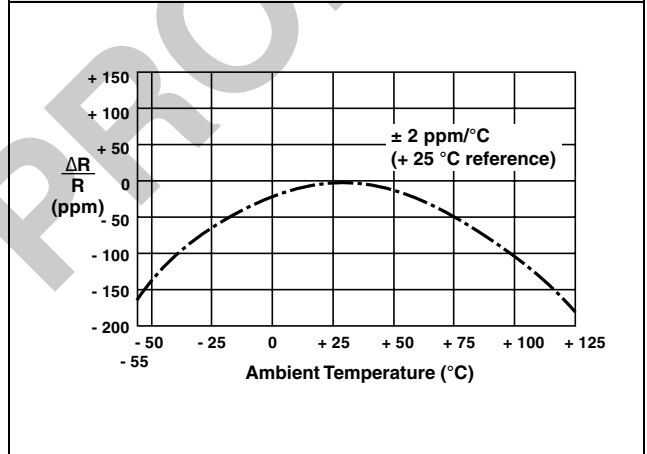

**FIGURE 6 - DIMENSIONS AND IMPRINTING**

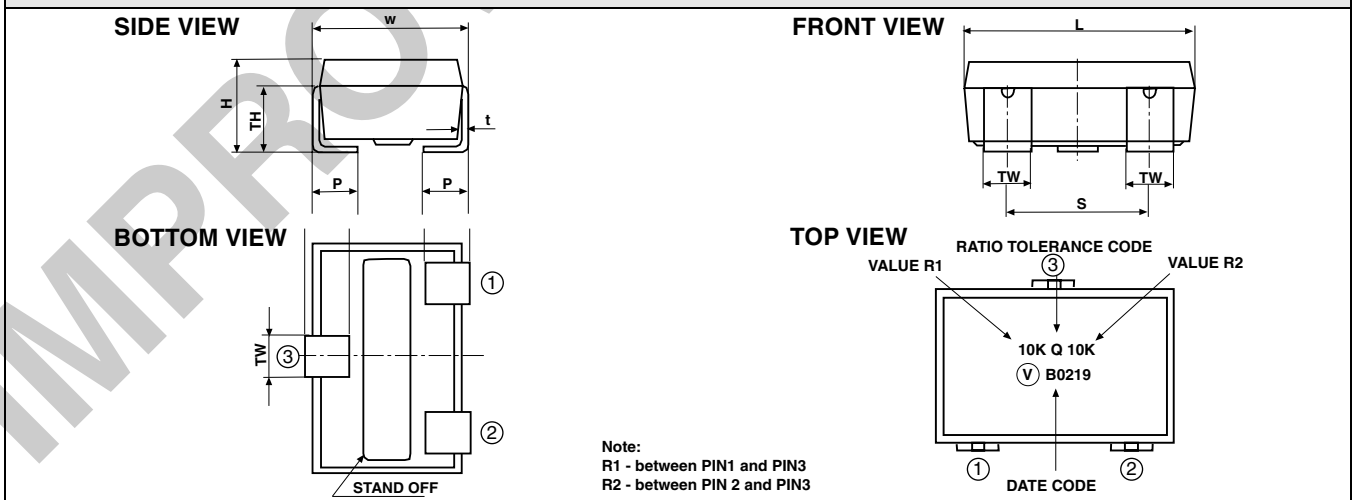

Note:  
R1 - between PIN1 and PIN3  
R2 - between PIN 2 and PIN3

DIMENSIONS	L	W	H	P	TW	TH	S	t
INCHES	$0.160 \pm 0.008$	$0.106 \pm 0.008$	$0.063 \pm 0.008$	$0.031 \pm 0.005$	$0.031 \pm 0.004$	$0.043 \pm 0.008$	$0.100 \pm 0.008$	$0.005 \pm 0.002$
MILLIMETERS	$4.06 \pm 0.20$	$2.69 \pm 0.20$	$1.60 \pm 0.20$	$0.79 \pm 0.13$	$0.79 \pm 0.10$	$1.09 \pm 0.20$	$2.54 \pm 0.20$	$0.13 \pm 0.05$



High Precision Bulk Metal® Foil Surface Mount Voltage Vishay Foil Resistors  
 Divider, TCR Tracking of  $\leq 0.5$  ppm/°C, Tolerance  
 Match of 0.01 % and Stability of  $\pm 0.005$  % (50 ppm)


**TABLE 3 - PERFORMANCE SPECIFICATIONS** (Test Method Per MIL-PRF-914)

SPECIFICATIONS	TYPICAL LIMITS
<b>Power rating</b> at 70 °C	Entire package: 0.1 W Each resistor: 0.05 W
<b>Maximum Working Voltage</b> (each resistor)	25 V
<b>Working Temperature Range</b>	- 65 °C to + 125 °C
<b>Thermal Shock</b> 25 x (- 65 °C to + 125 °C)	$\Delta R = 0.01$ % (100 ppm) $\Delta \text{Ratio} = 0.005$ % (50 ppm)
<b>Thermal Shock</b> 5 x (- 65 °C to + 125 °C) and <b>Power Conditioning</b> 1.5 rated power at 25 °C, 100 hours	$\Delta R = 0.015$ % (150 ppm) $\Delta \text{Ratio} = 0.01$ % (100 ppm)
<b>DWV</b> atmospheric pressure, 200 V (A.C.), 1 minute	Successfully passed
<b>Insulation Resistance</b> 100 V (D.C.), 1 minute	$> 10^4$ M $\Omega$
<b>Resistance to Soldering Heat</b>	$\Delta R = 0.01$ % (100 ppm) $\Delta \text{Ratio} = 0.005$ % (50 ppm)
<b>Moisture Resistance</b> + 65 °C to - 10 °C; 90 % to 98 % RH; 0.1 x rated power, 240 hours	$\Delta R = 0.02$ % (200 ppm) $\Delta \text{Ratio} = 0.005$ % (50 ppm)
<b>Shock (Specified Pulse)</b> 100 G	$\Delta R = 0.005$ % (50 ppm) $\Delta \text{Ratio} = 0.0025$ % (25 ppm)
<b>Vibration, High Frequency</b> (10 Hz - 2000 Hz), 20 G	$\Delta R = 0.01$ % (100 ppm) $\Delta \text{Ratio} = 0.005$ % (50 ppm)
<b>High Temperature Exposure</b> 100 hours at 125 °C	$\Delta R = 0.01$ % (100 ppm) $\Delta \text{Ratio} = 0.005$ % (50 ppm)
<b>Low Temperature Storage</b> 24 hours at - 65 °C	$\Delta R = 0.005$ % (50 ppm) $\Delta \text{Ratio} = 0.005$ % (50 ppm)
<b>Load Life Stability</b> 2000 hours at + 70 °C; rated power	$\Delta R = 0.005$ % (50 ppm) $\Delta \text{Ratio} = 0.005$ % (50 ppm)
<b>Short Time Overload</b> 6.25 x Rated Power; 5 seconds	$\Delta R = 0.005$ % (50 ppm) $\Delta \text{Ratio} = 0.0025$ % (25 ppm)
<b>Low Temperature Operation</b>	$\Delta R = 0.005$ % (50 ppm) $\Delta \text{Ratio} = 0.0025$ % (25 ppm)
<b>Weight</b>	0.04 g

Vishay Foil Resistors High Precision Bulk Metal® Foil Surface Mount Voltage Divider, TCR Tracking of  $\leq 0.5 \text{ ppm}/^\circ\text{C}$ , Tolerance Match of  $0.01 \%$  and Stability of  $\pm 0.005 \%$  (50 ppm)

**TABLE 4 - GLOBAL PART NUMBER INFORMATION**

NEW GLOBAL PART NUMBER: Y1485V0067BA9W (preferred part number format)

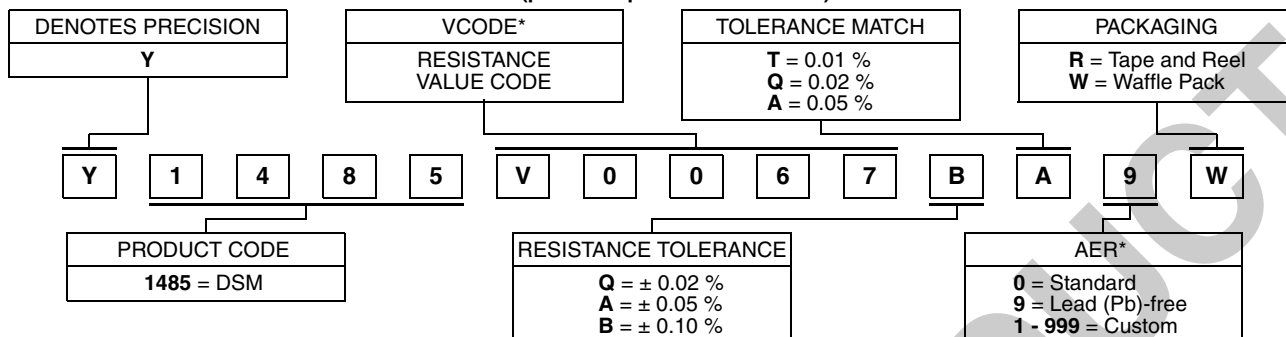

FOR EXAMPLE: ABOVE GLOBAL ORDER Y1485 V0067 B A 9 W:

TYPE: DSM  
 VALUES: 10K/400R  
 ABSOLUTE TOLERANCE:  $\pm 0.1 \%$   
 TOLERANCE MATCH:  $0.05 \%$   
 TERMINATION: Lead (Pb)-free  
 PACKAGING: Waffle Pack

HISTORICAL PART NUMBER: DSM 10K 400R TCR2 B A S W (will continue to be used)

<b>DSM</b>	<b>10K 400R</b>	<b>TCR2</b>	<b>B</b>	<b>A</b>	<b>S</b>	<b>W</b>
MODEL	OHMIC VALUE $R_1 = 10 \text{ k}\Omega$ $R_2 = 400 \Omega$	TCR CHARACTERISTIC	ABSOLUTE TOLERANCE $Q = \pm 0.02 \%$ $A = \pm 0.05 \%$ $B = \pm 0.10 \%$	TOLERANCE MATCH $T = 0.01 \%$ $Q = 0.02 \%$ $A = 0.05 \%$	TERMINATION $S = \text{Lead (Pb)-free}$ $B = \text{Tin/Lead}$	PACKAGING $T = \text{Tape and Reel}$ $W = \text{Waffle Pack}$

**Note**

\* For non-standard requests or additional values, please contact Application Engineering.

**TABLE 5 - RESISTANCE VALUE CODE LIST FOR POPULAR RATIOS**

(other values available upon request)

VCODES	R1/R2 RATIO	R1	R2	VCODES	R1/R2 RATIO	R1	R2
V0052	100	10K	100R	V0080	2.5	1K	400R
V0065	50	10K	200R	V0081		500R	200R
V0066		5K	100R	V0082	2	10K	5K
V0067	25	10K	400R	V0083		2K	1K
V0068		5K	200R	V0084		1K	500R
V0069	20	10K	500R	V0085		400R	200R
V0070		2K	100R	V0086		200R	100R
V0071	10	10K	1K	V0087	1.25	500R	400R
V0072		2K	200R	1	V0001	10K	10K
V0073		1K	100R		V0002	5K	5K
V0074		5K	1K		V0059	2K	2K
V0075		5	2K		400R	V0004	1K
V0076	1K		200R		V0091	500R	500R
V0077	500R		100R		V0090	400R	400R
V0246	4	10K	2K5		V0089	200R	200R
V0078		2K	500R		V0088	100R	100R
V0079		400R	100R				



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.