

UGRP20F

Ultra fast Plastic Rectifiers

VOLTAGE: 350V

CURRENT:20.0A



FEATURE


- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
- Ultra fast recovery time for high efficiency
- Excellent high temperature switching
- Glass passivated junction
- High voltage and high reliability
- High speed switching
- Low forward voltage

MECHANICAL DATA

Case: JEDEC ITO-220AB molded plastic body over passivated chip

Terminals: Plated Insert leads, solderable per MIL-STD-750, Method 2026

Mounting Position: Any

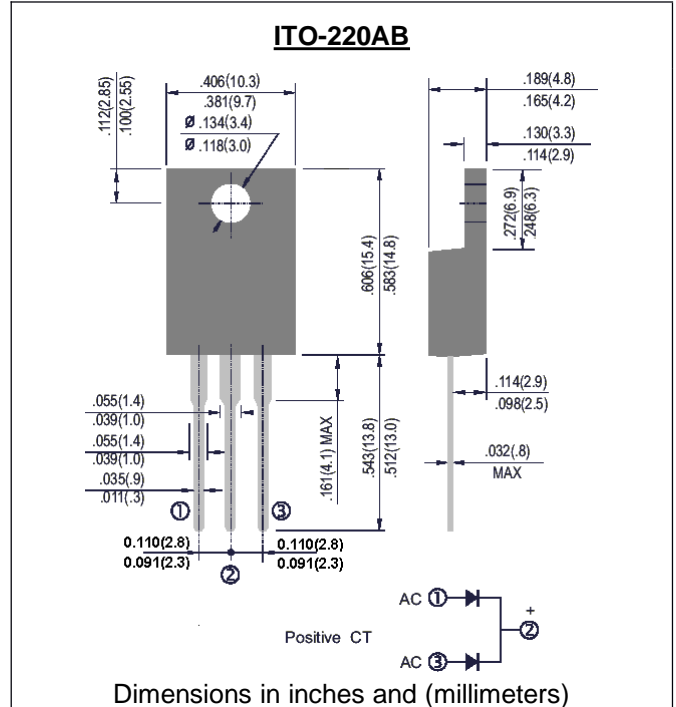

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	UGRP20F	units
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	350	V
Maximum RMS Voltage	V _{rms}	245	V
Maximum DC blocking Voltage	V _{dc}	350	V
Maximum Average Forward Rectified at T _c =100°C	I _{f(av)}	20.0	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I _{fsm}	100	A
Maximum Forward Voltage at Forward Current at 10A	V _f	1.3	V
Maximum Reverse Recovery Time (Note 1)	T _{rr}	25	nS
Typical thermal resistance junction to case	R _{th(jc)}	5.0	°C/W
Maximum DC Reverse Current T _a =25°C at rated DC blocking voltage T _a =100°C	I _r	10 100	μA μA
Storage and Operating Temperature Range	T _{stg} , T _j	-55 to +150	°C

Note:

1. Reverse Recovery Condition I_f =0.5A, I_r =1.0A, I_{rr} =0.25A

Rev.1

www.gulfsemi.com

RATINGS AND CHARACTERISTIC CURVES UGRP20F

