
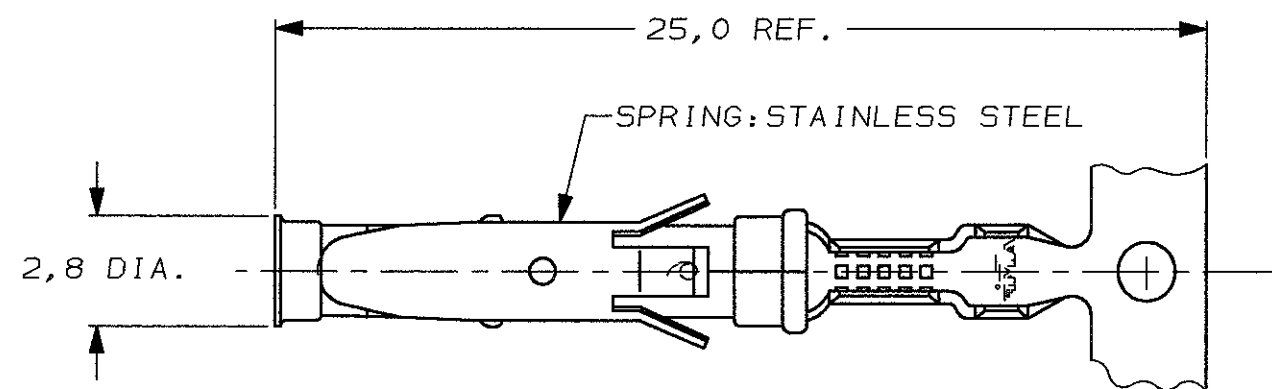



DO NOT SCALE
DIMENSIONS IN mm

METRIC




THIRD ANGLE
PROJECTION




STRIP

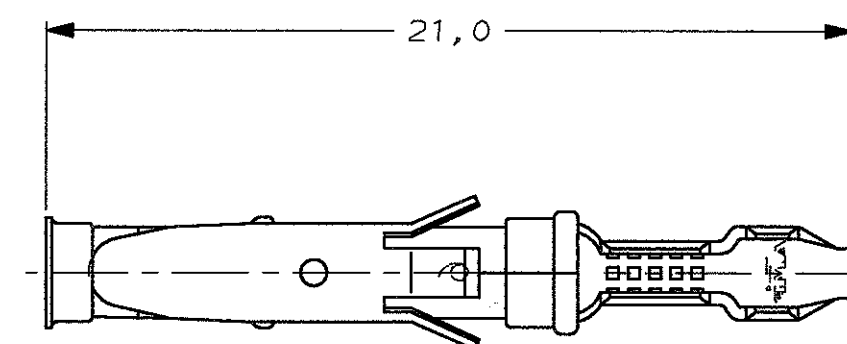

LOOSE-PIECE

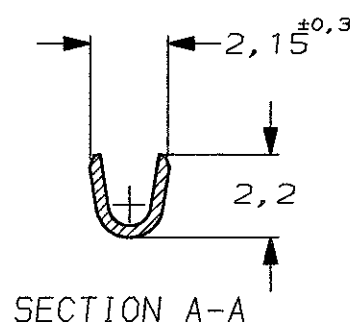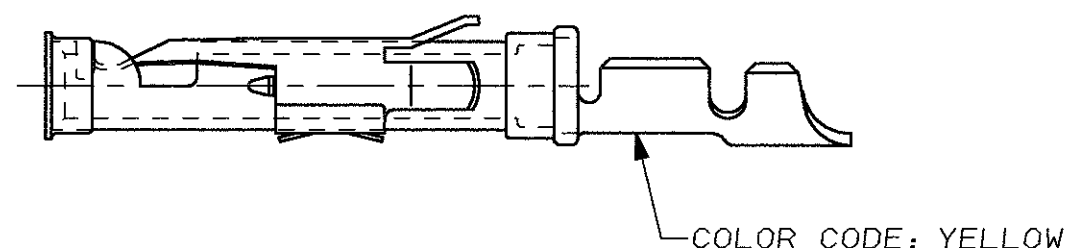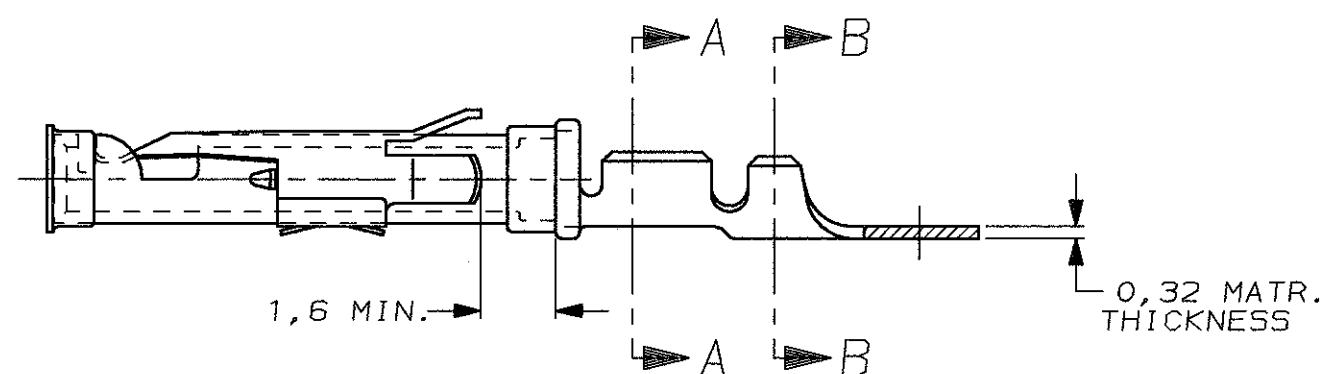

SECTION A-A

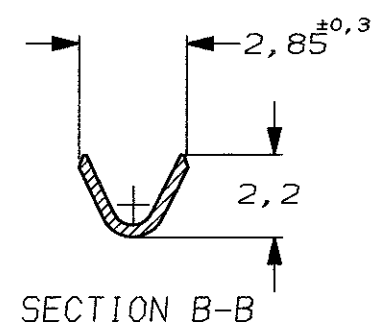

SECTION B-B

WIRE RANGE : 0,20-0,50 mm² (24-20 AWG)
INSUL. RANGE : 1,1 -1,8 mm (.045-.070)

NOTES :

- 1 U.L. RECOGNIZED UNDER FILE E28476 VOL. VI SEC. I
- 2 FOR CRIMP DETAILS SEE AMP-SPEC. 114-19.000
- 3 MEETS PRODUCT SPECIFICATION 108-10042
- 4 SPECIAL REEL WITH 200 PCS FOR REEL-FED HAND-TOOL

NOTES	MATERIAL	THICKNESS	AREA
20	TIN	2,0 µm	ALL OVER
21	NICKEL GOLD TIN/LEAD	0,8 µm	ALL OVER CONTACT AREA BARREL
22	NICKEL GOLD GOLD	0,8 µm	ALL OVER CONTACT AREA ALL OVER
23	NICKEL GOLD GOLD	1,2 µm	ALL OVER CONTACT AREA ALL OVER
24	NICKEL SILVER TIN/LEAD	2,5 µm	ALL OVER CONTACT AREA BARREL
25	SILVER NICKEL	1,5-2,5 µm 0,76 µm	ALL OVER ALL OVER
26	SILVER	2,5 µm	ALL OVER
27	NICKEL	1,27 µm	ALL OVER
28	BRIGHT TIN/LEAD	1,27 µm	ALL OVER
29	LUBRICATED		

DIRECTION OFF TOP OF REEL
AMPOMATOR + MINI-APPL.
107-3-F16.1

107-3-F16.2

107-3-F16.4

1-163087-5	A	1-163088-4	BRASS	SILVER	28
1-163087-4	A	1-163088-4	BRASS	EL. TIN	31 20
1-163087-3	A	1-163088-3	BRASS	BR. TIN/LEAD	30
5-163087-3	A		BRASS	ECON. GOLD	21
5-163087-2	A		BRASS	SEL. GOLD	22
5-163087-1	A		BRASS	EL. TIN	20
1-163087-2	B	1-163088-1	BRASS	GOLD	23
1-163087-1	A		BRASS	ECON. GOLD	21
1-163087-0	B	1-163088-0	BRASS	ECON. GOLD	21
163087-9	A		BRASS	EL. TIN	20
163087-8	A		BRASS	SEL. GOLD	22
163087-2	A	163088-2	BRASS	SEL. GOLD	22
163087-1	A	163088-1	BRASS	EL. TIN	20
PARTNUMBER		DIRECTION OF REEL	LOOSE-PIECE	MATERIAL	PLATING

CUSTOMER DRAWING FOR REFERENCE ONLY
WILL NOT BE UPDATED

© COPYRIGHT 19- BY AMP HOLLAND B.V.
ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE
COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.
THIS DRAWING IS UNPUBLISHED
RELEASED FOR PUBLICATION

AMP AMP HOLLAND B.V.
s-Hertogenbosch,
The Netherlands.

NAME
SOCKET TYPE III CONTACT
SIZE 16

DR. :	CHK. :	APP. :	DWG. No.	REV. LTR.	SHEET
DATE :	DATE :	DATE :	163087	U	1 OF 1