
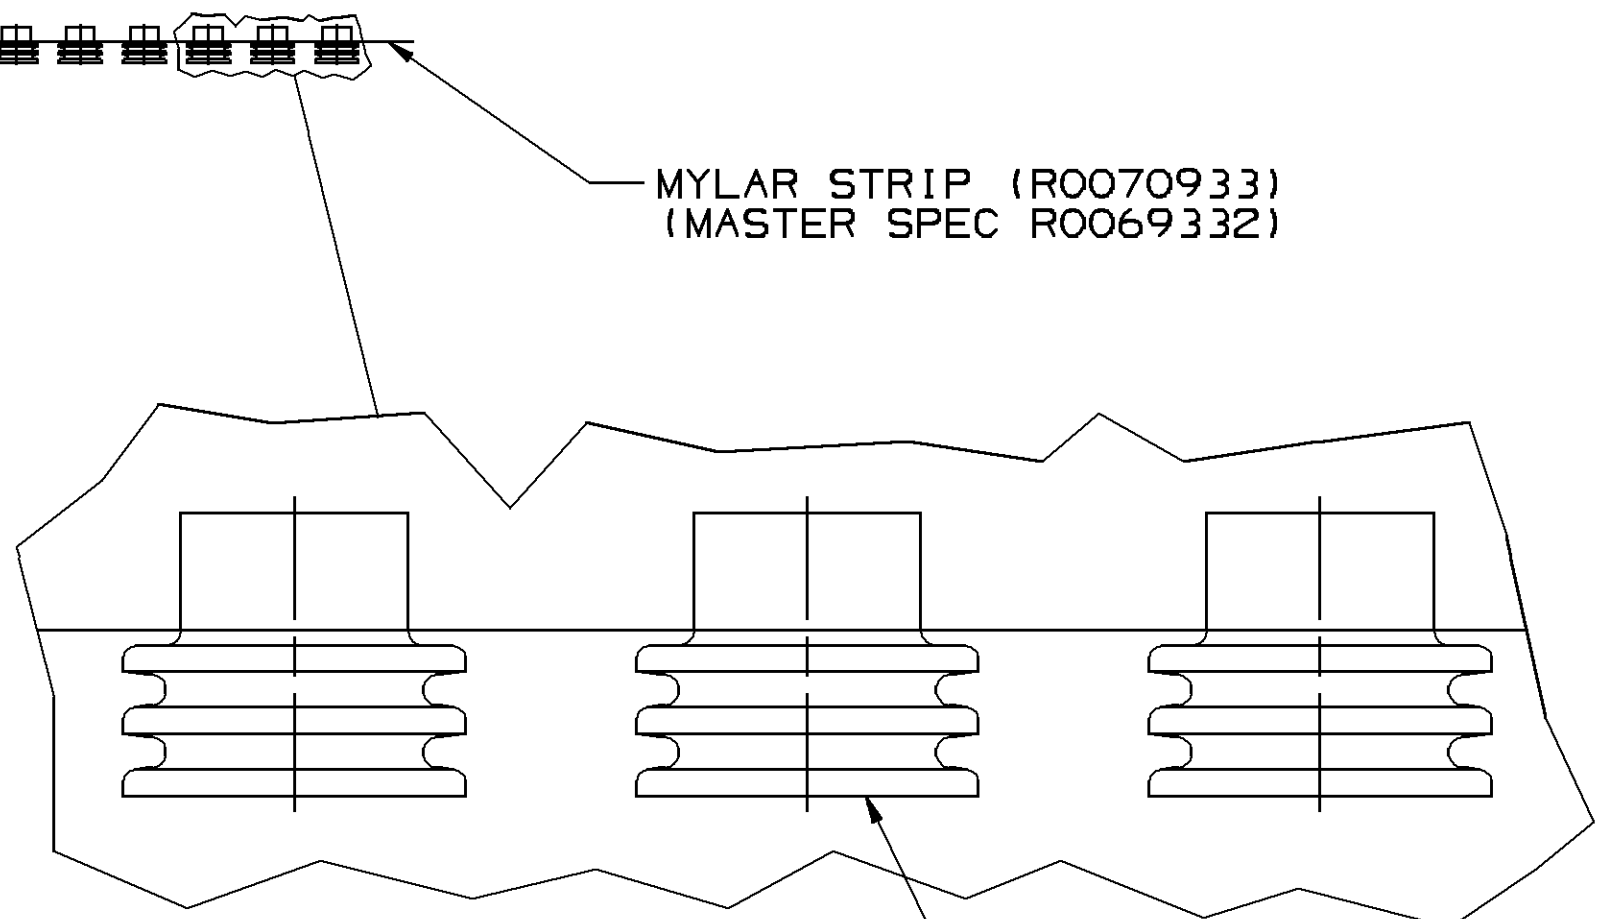


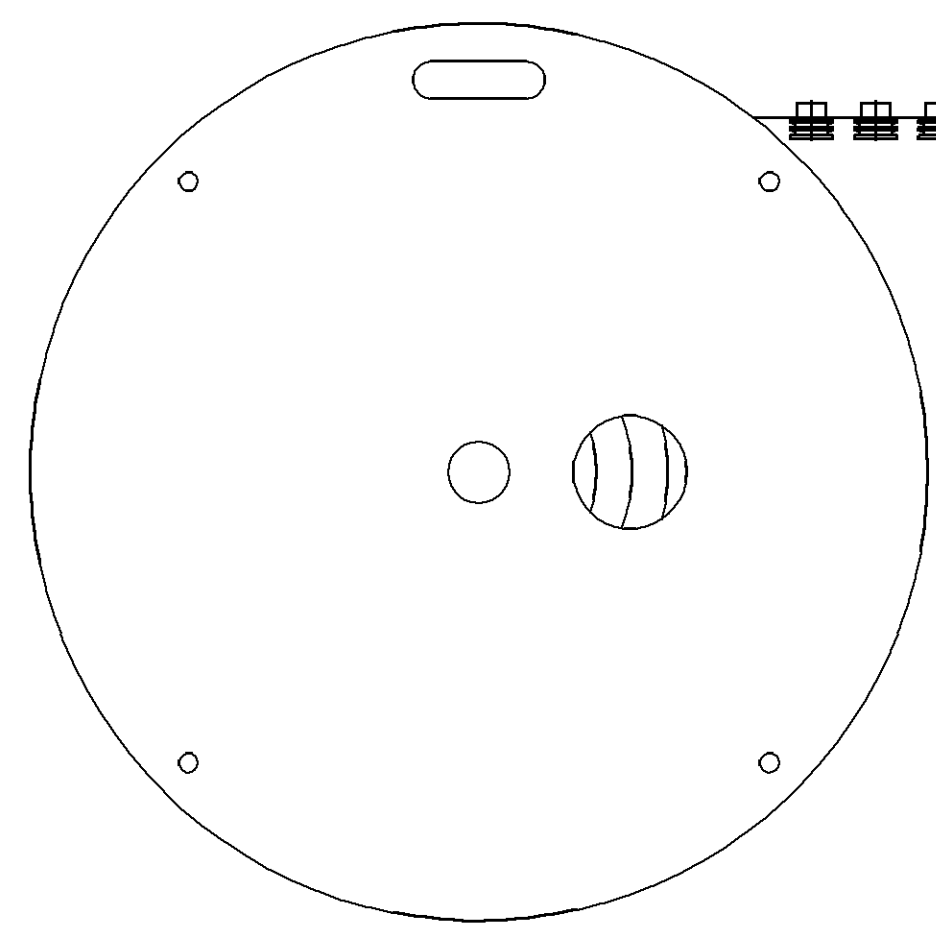



SEAL/MYLAR ASSEMBLY DETAIL

NOTES:




1. THE MYLAR TAPE IS ONLY A CARRIER USED AS A PROCESS AID AND IS NOT PART OF THE FINAL HARNESS ASSEMBLY.
2. WHEN PARTS ARE SHIPPED, THEY MUST BE PACKED IN PLASTIC BAGS OR SHIPPING CONTAINERS MUST BE LINED WITH PLASTIC LINERS. BAGS OR LINERS MUST BE SEALED TO AVOID ENTRY OF FOREIGN MATTER.

MYLAR STRIP (R0070933)
(MASTER SPEC R0069332)


SEAL - SEE CHART

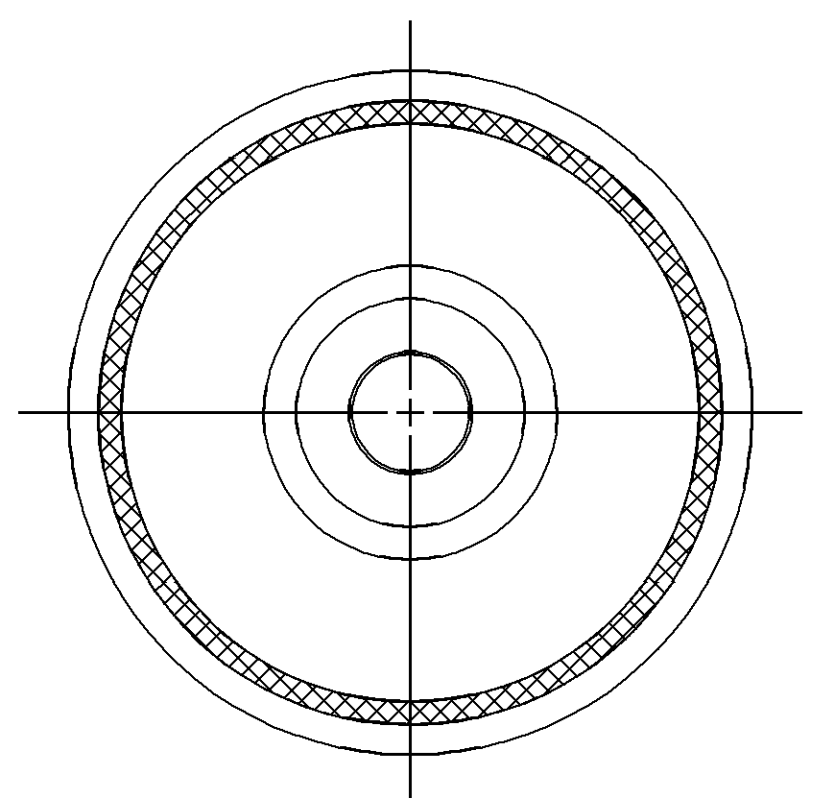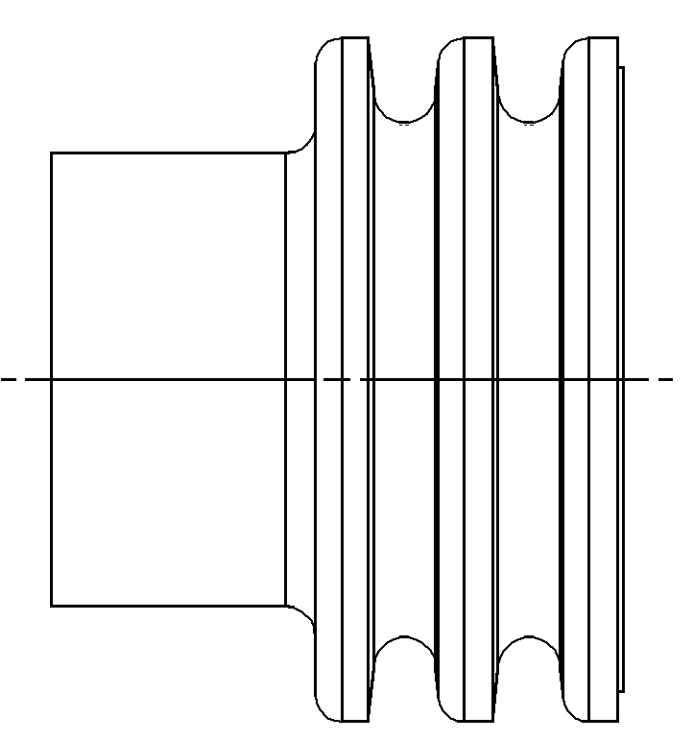


OPTIONAL CONSTRUCTION 1
(ANTI-STICK RING)

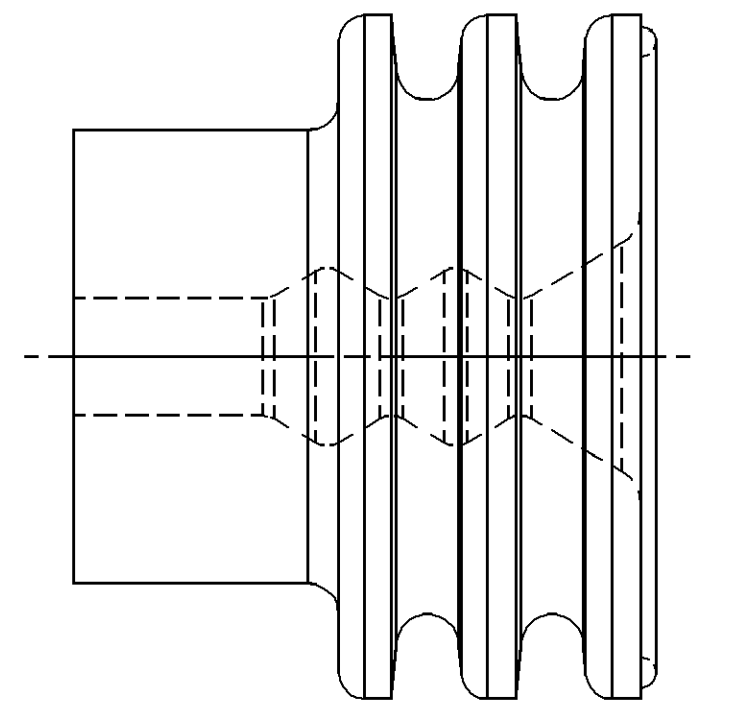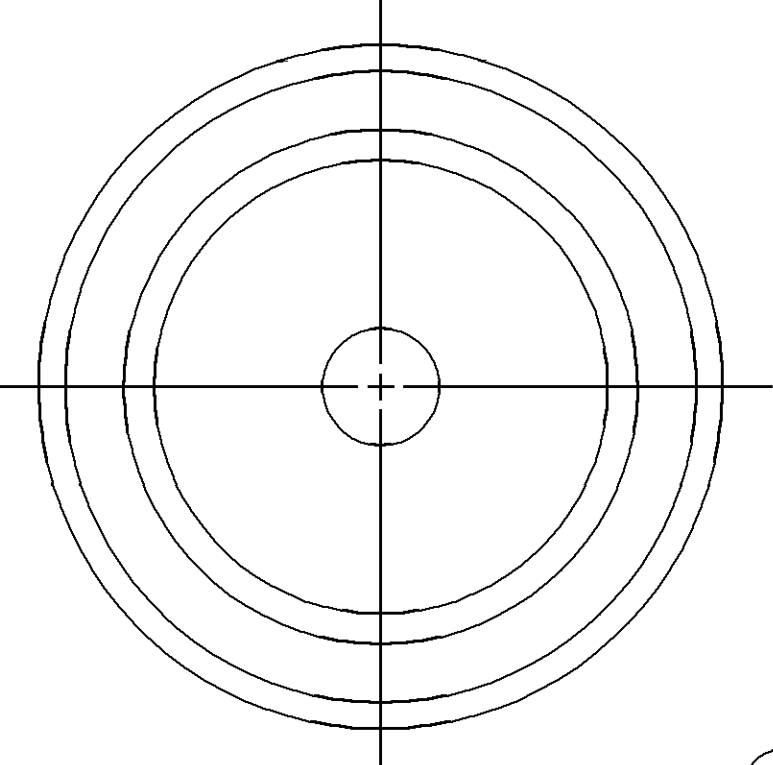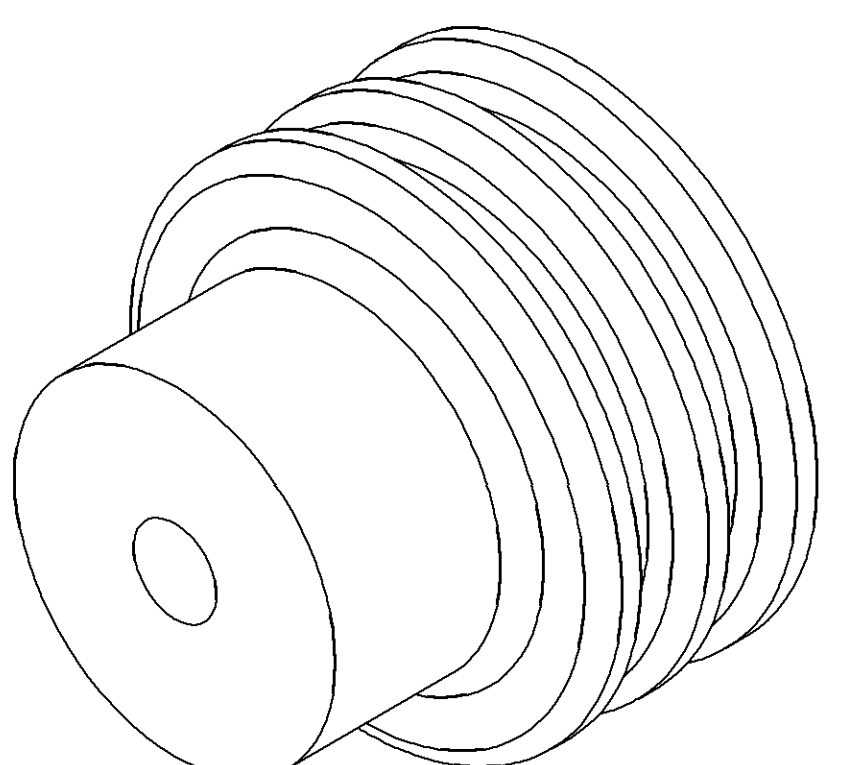

OPTIONAL CONSTRUCTION 2
THIS IS THE PREFERRED CONSTRUCTION FOR NEW
TOOL BUILDS
(ANTI-STICK RING)

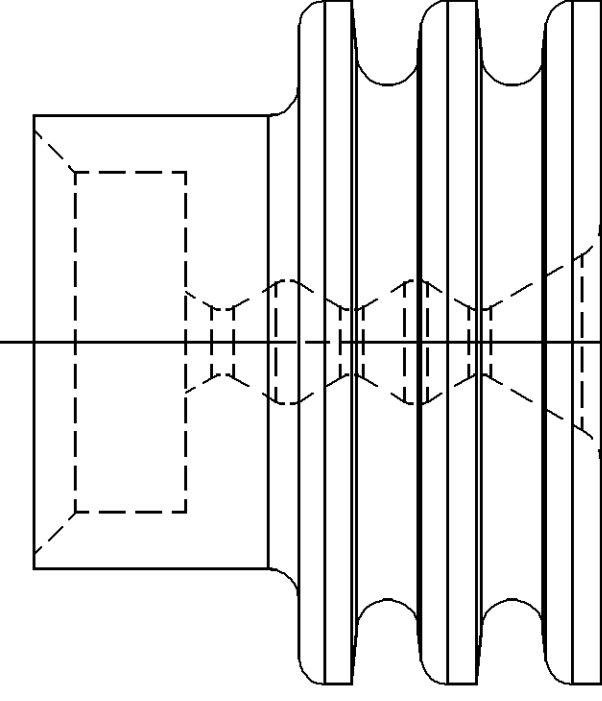


TYPE 202
SAME AS TYPE 201
EXCEPT AS SHOWN

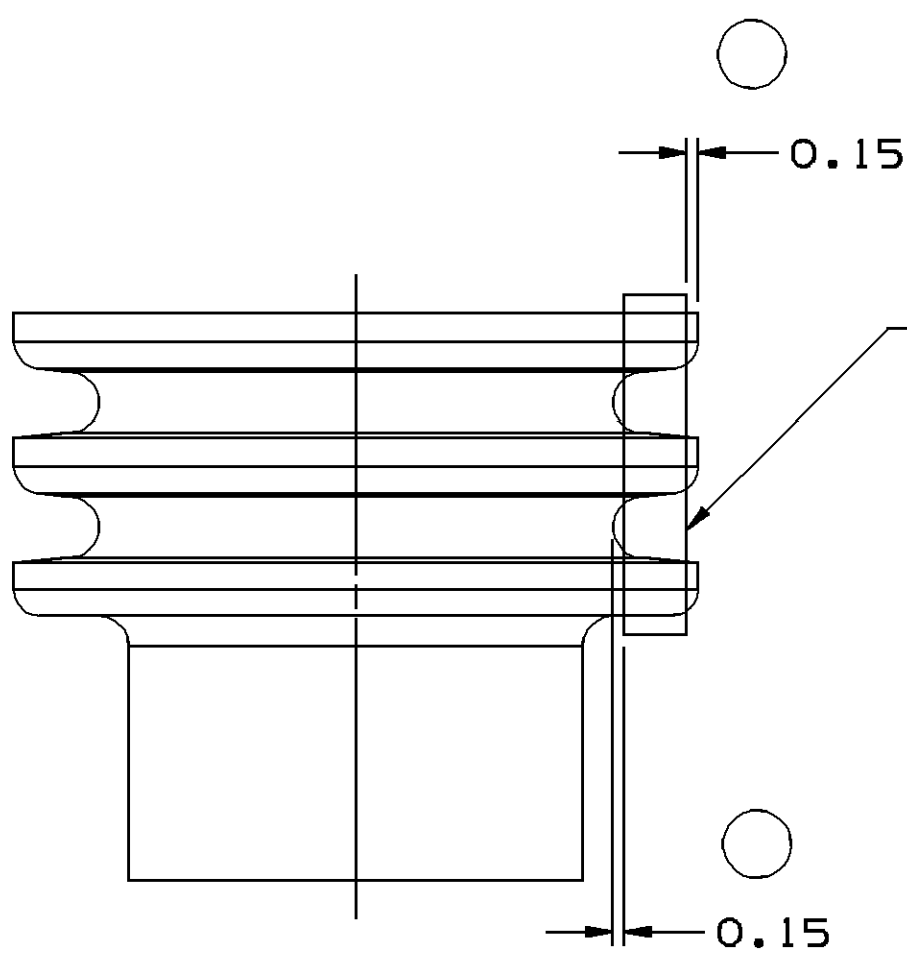


SEALING RIBS MUST BE FREE OF
SINKS, VOIDS, KNIT LINES AND
FLASH IN THE AREA SHOWN
ALL AROUND PART.


SEE VPS A-121 FOR ADDITIONAL
INFORMATION.

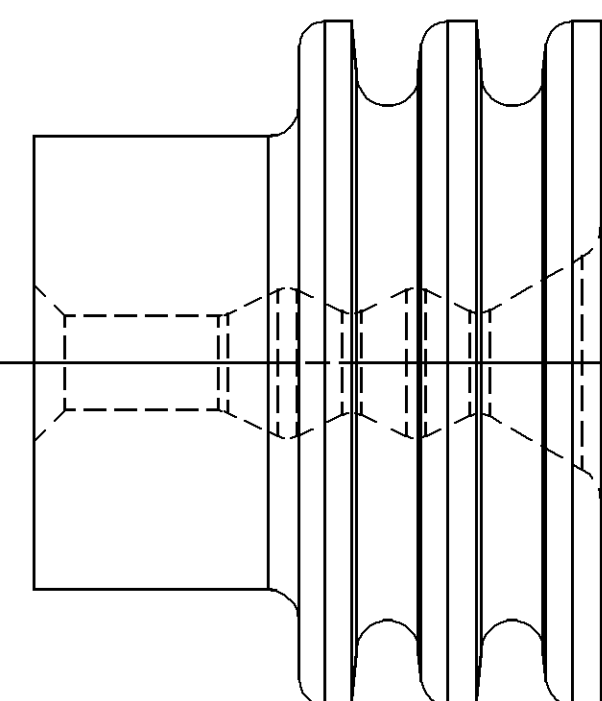

TYPE 203
SAME AS TYPE 201
EXCEPT AS SHOWN

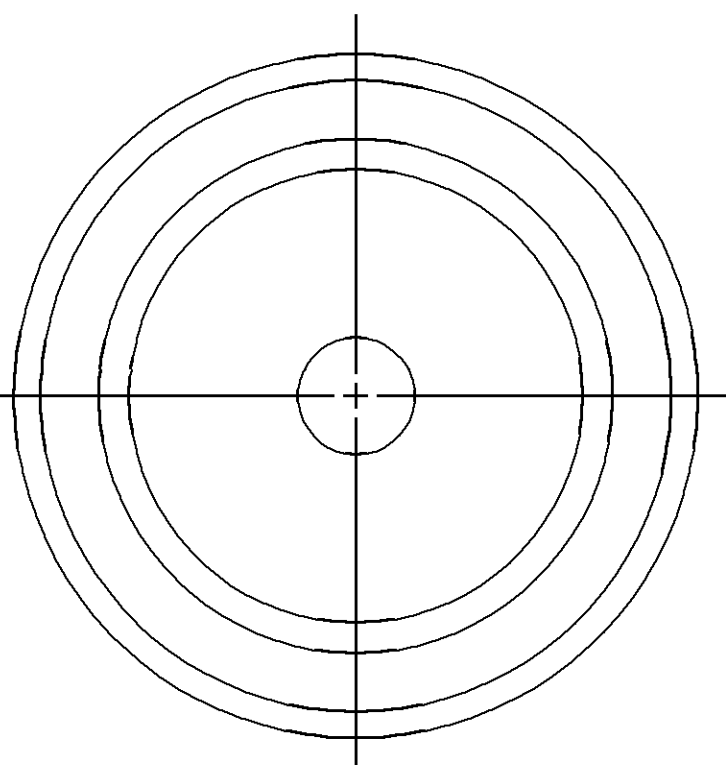

TYPE 201

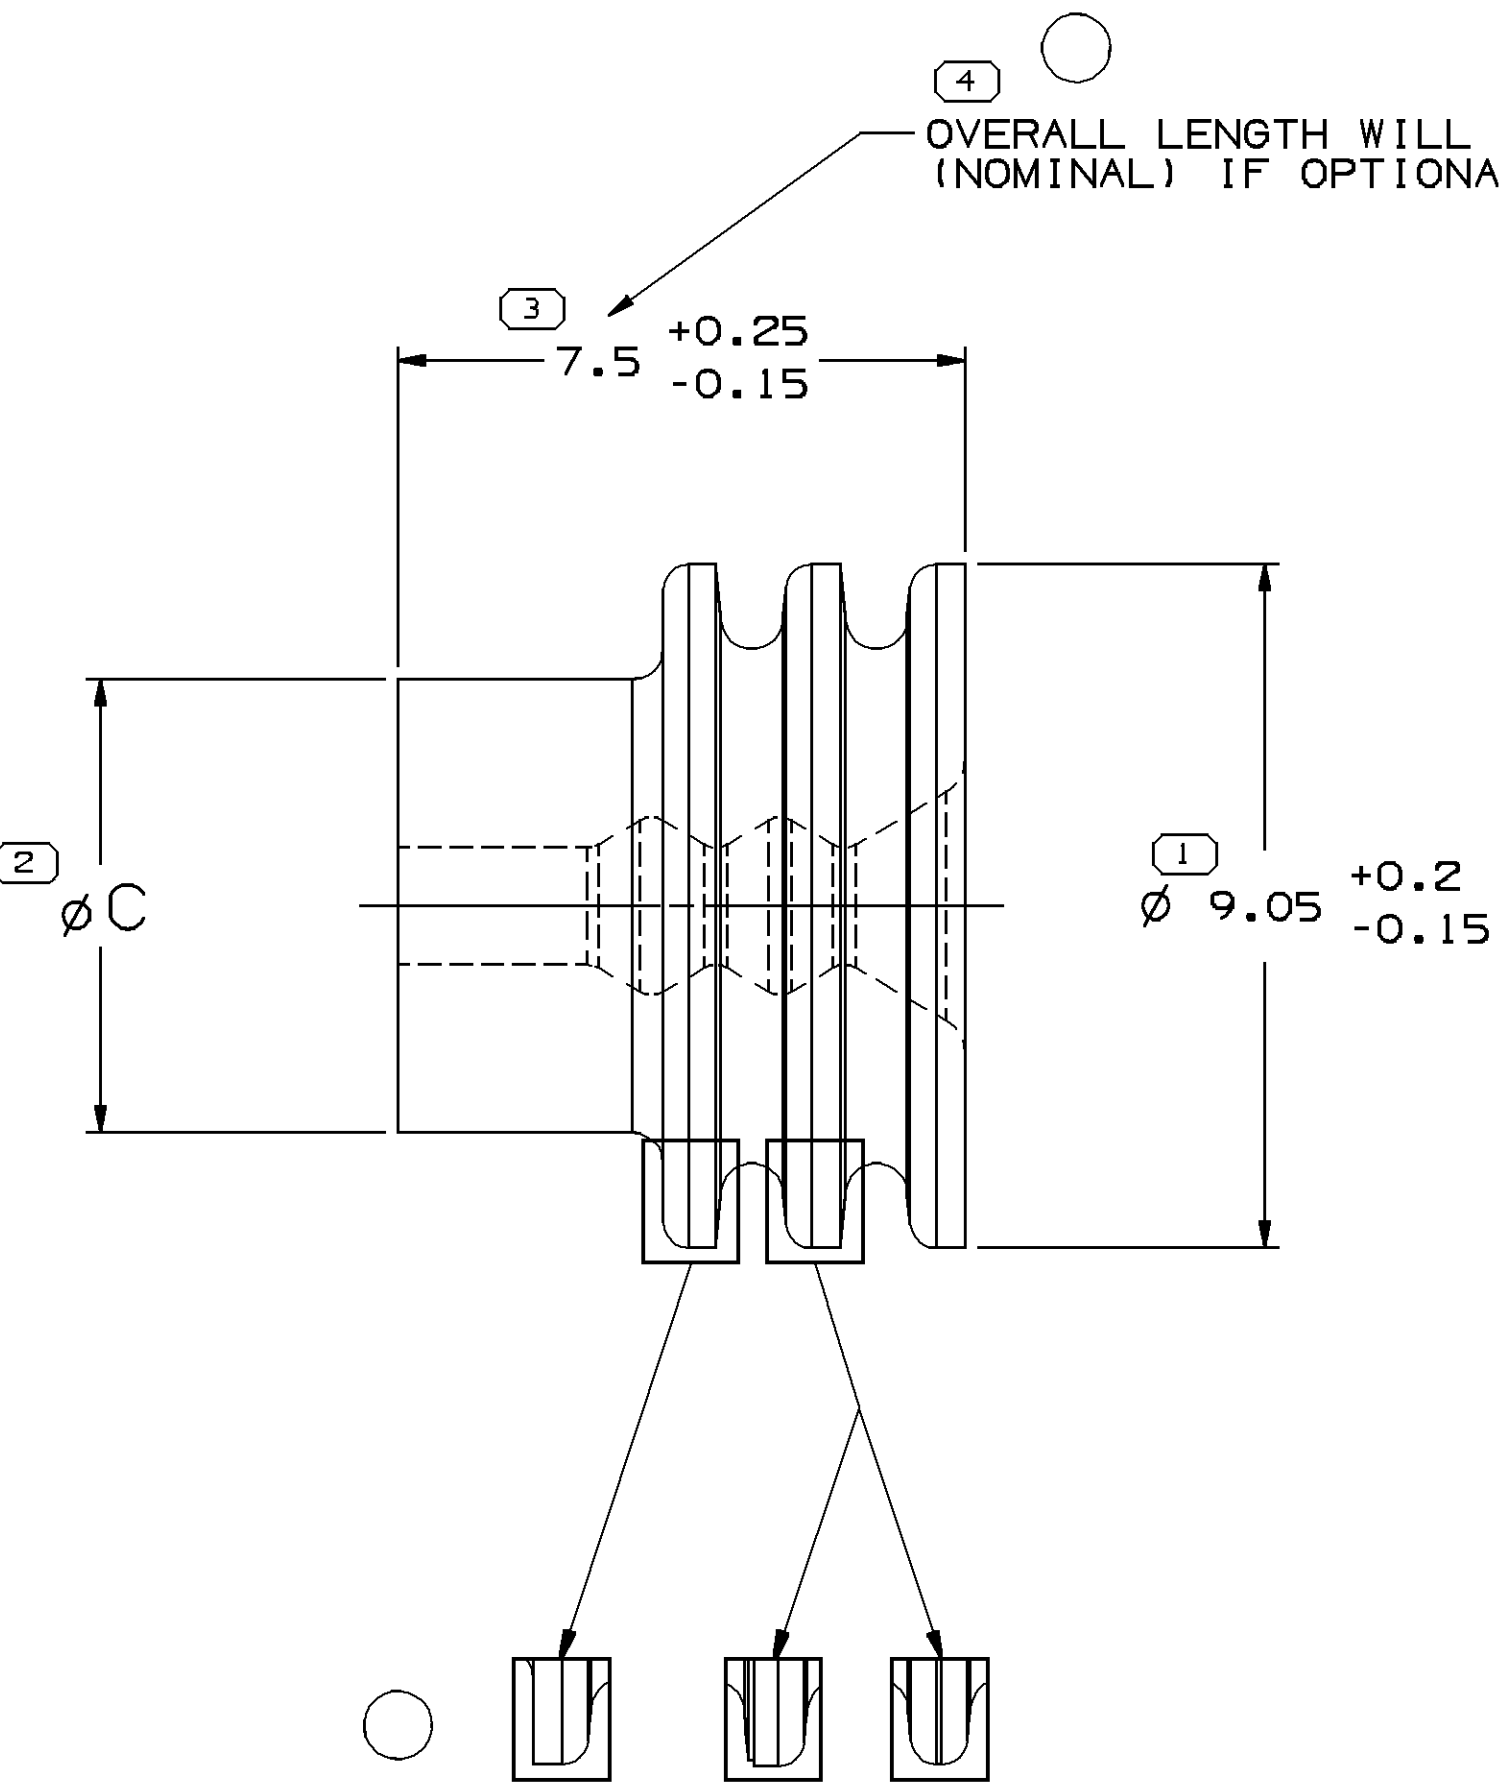

SEALING RIBS MAY DIFFER AS SHOWN

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION.
(SEE MATH MODEL FOR PRECISE DIMENSIONS.) FOR ALL
OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL
BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
2. PARTS ARE TO BE PACKAGED IN SEALED PLASTIC BAGS. GROSS
WEIGHT INCLUDING CARTON IS NOT TO EXCEED 34 POUNDS.
3. *DESIGNED AS A PUSH ON SEAL. SEAL SLIDES OVER INSULATION
WINGS. A TERMINAL CANNOT BE CRIMPED OVER THIS SEAL.
4. TO IMPROVE SEAL PROCESSING ON SLIPPERY OR SMOOTH CABLE
INSULATION, THE APPLICATION ENGINEER MAY SURFACES THE
NEXT SMALLER SEAL SIZE P.N. IN PLACE OF THE INDICATED
SEAL FOR THE "CABLE O.D." LISTED IN THE CHART.
5. 12110210/12124843 CAN BE REPLACED BY ANY SEAL
ON THIS PAGE IN CONJUNCTION WITH 12124471 OR 12124598
TERMINAL DEPENDING ON CABLE OD.

				15324992	01	AE	OBSOLETE		M3469004	RED	M3466004	203	1.7-1.29	6	8.5	-	
				15324991	01	AE			M3469006	YELLOW	M3466006	203	2.15-1.6	6	8.5	12052930	
				15324990	01	AE			M3469039	PPL	M3466039	201	4.5-3.61	6	8.5	12048443	
				15324989	01	AE			M3469004	RED	M3466004	201	3.76-2.81	6	8.5	12048442	
				15324988	01	AE			M3469011	WHT	M3466011	201	2.85-2.01	6	8.5	12048441	
				15324987	01	AE			M3469005	ORN	M3466005	201	5.16-4.4	6.5	8.5	12034170	
12162068	A4	-	-	12162067	A7	-			M2261013	PNK		203	1.7-1.29	6	8.5	-	
12124843	A1	-	OBSOLETE	*12110210	B4	-	OBSOLETE		M2261001	GRN	-	202	2.12-1.67	6.5	8.5	-	
12065703	A4	-	RESTRICTED	12034170	B5	-	RESTRICTED		M2261005	ORN	-	201	5.16-4.4	6.5	8.5	15324987	
12052931	A4	-	RESTRICTED	12052930	05	AD	RESTRICTED		M3471006	YELLOW	M2261006	203	2.15-1.6	6	8.5	15324991	
				12048312	A3	-	OBSOLETE		M2261008	BLU	-	201	4.21-3.5	6.5	8.5	-	
12052453	A4	-	RESTRICTED	12048443	03	AC	RESTRICTED		M3471039	PPL	M2261009	201	4.5-3.61	6	8.5	15324990	
12052452	A4	-	RESTRICTED	12048442	03	AC	RESTRICTED		M3471004	RED	M2261004	201	3.76-2.81	6	8.5	15324989	
12048433	A4	-	RESTRICTED	12048441	03	AC	RESTRICTED		M3471011	WHT	M2261011	201	2.85-2.01	6	8.5	15324988	
PART NO	REV/N/P	STATUS		PART NO	REV/N/P	STATUS		MATERIAL SPECIFICATION		COLOR (REF ONLY)	ALTERNATE MATERIAL SPECIFICATION	TYPE	CABLE O.D.±0.05 SEE NOTE #4	C		CAVITY ID	EQUIVALENT CABLE SEAL
	MYLAR & CABLE	SEAL	ASM		CABLE SEAL												