

LM4001G THRU LM4007G


SURFACE MOUNT GLASS PASSIVATED SILICON RECTIFIERS

Reverse Voltage - 50 to 1000 V

Forward Current - 1 A

Features

- The plastic package carries Underwrites Laboratory Flammability classification 94V-0
- For surface mounted application
- Glass passivated junction

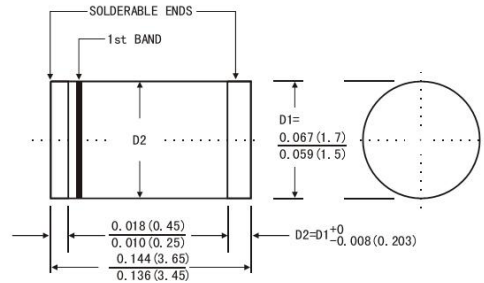

MiniMELF (DO-213AA) Plastic Package

Mechanical Data

- Case: MiniMELF(DO-213AA), molded plastic body
- Terminals: Lead solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any

Maximum Ratings and Electrical characteristics


Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	LM4001G	LM4002G	LM4003G	LM4004G	LM4005G	LM4006G	LM4007G	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_A = 75\text{ }^\circ\text{C}$	$I_{(AV)}$	1							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	25							A
Maximum Forward Voltage at 1 A	V_F	1.1							V
Maximum Reverse Current at Rated DC Blocking Voltage	I_R	5 50							μA
Typical Junction Capacitance ¹⁾	C_J	15							pF
Typical Thermal Resistance ²⁾	$R_{\theta JA}$	75							$^\circ\text{C/W}$
Typical Thermal Resistance ³⁾	$R_{\theta JL}$	30							$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_j, T_{stg}	- 65 to + 175							$^\circ\text{C}$

¹⁾ Measured at 1 MHz and applied reverse voltage of 4 V D.C


²⁾ Thermal resistance from junction to ambient, 0.24 X 0.24" (6 X 6 mm) copper pads to each terminal

³⁾ Thermal resistance from junction to terminal, 0.24 X 0.24" (6 X 6 mm) copper pads to each terminal



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002 Certificate No. 05103 | ISO 14001:2004 Certificate No. 7116 | ISO 9001:2000 Certificate No. 050059 | BSI-ONSAS 18001:1999 Certificate No. 7116 | IECQ QC 080000 Certificate No. 19C080001

LM4001G THRU LM4007G

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

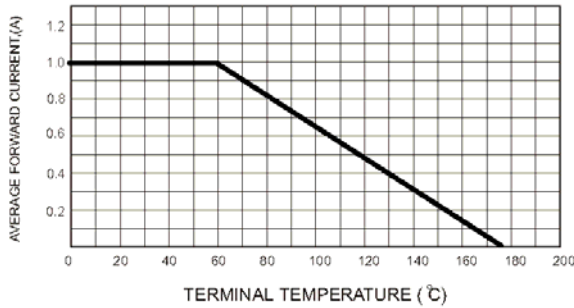


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

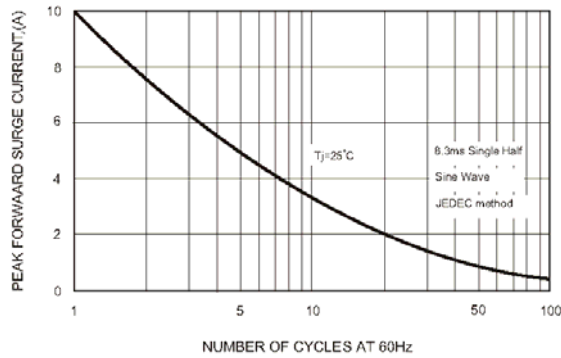


FIG.4-TYPICAL JUNCTION CAPACITANCE

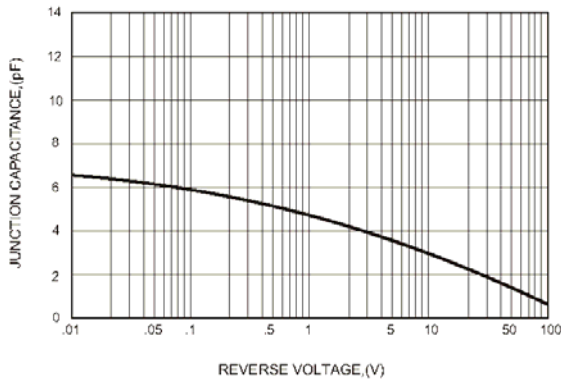


FIG.2-TYPICAL FORWARD CHARACTERISTICS



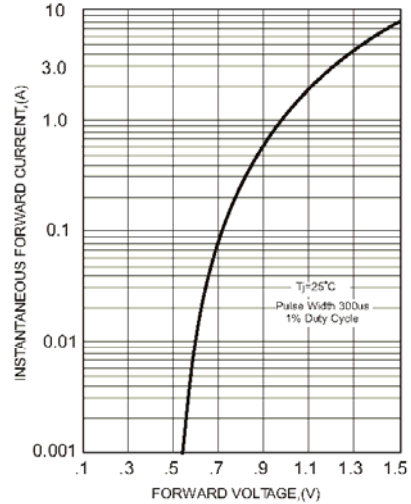


FIG.5 - TYPICAL REVERSE CHARACTERISTICS



SEMTECH ELECTRONICS LTD.
 (Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)

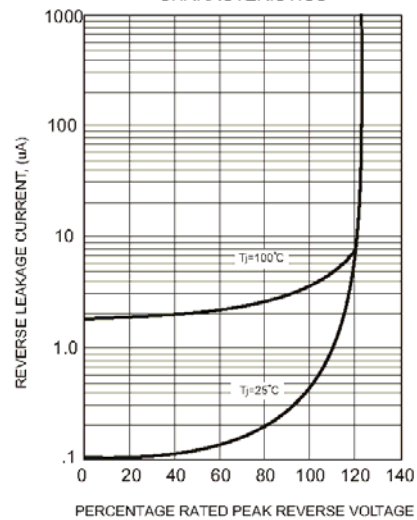