

VCXO-4085S

1. Specification

Nominal Frequency Range:	2 MHz to 32 MHz
Nominal freq. tolerance @ $U_C = 2.5V$, $T = 25 \pm 3^\circ C$:	$< \pm 10$ ppm
Frequency deviation after reflow and cooling to $25^\circ C$:	$< \pm 3$ ppm
Frequency stability in the temperature range $-40^\circ C$ to $+85^\circ C$: vs. supply voltage changes $U_B \pm 5\%$: vs. load changes $\pm 5\%$:	$< \pm 25$ ppm $< \pm 5$ ppm $< \pm 5$ ppm
Aging @ $25^\circ C$:	$< \pm 5$ ppm / first year $< \pm 2$ ppm / year in the following years
Frequency control range:	$\geq \pm 100$ ppm
Control voltage U_C :	0.5 V to 4.5 V
Transfer function / Linearity:	positive / 10%
Supply voltage U_B :	5 V $\pm 5\%$
Current consumption:	≤ 25 mA
Output voltage : load : duty cycle : rise time, fall time:	HCMOS 1 kOhm // 15 pF 40% / 60% ≤ 8 ns (load 1kOhm//15pF)
Temperature ranges Operating: Operable: Storage:	$-40^\circ C \dots +85^\circ C$ $-40^\circ C \dots +85^\circ C$ $-55^\circ C \dots +105^\circ C$

2. Environmental conditions


Shock:	DIN IEC 68-2-27, Test Ea, 100 g, 6ms Half-sine, 3 bumps in 3 main directions
Vibration:	DIN IEC 68-2-6, Test Fc, 10-500Hz, 10g, 2 h in 3 main directions
Humidity:	DIN IEC 68-2-3, $40^\circ C/93\%RH$, 21 days
Solderability:	DIN IEC 68-2-20 only for wire leads, Methode 3: Solder globule at $+235^\circ C$

3. Marking

Manufacturer's name, date code(week/year);
Specification;
Center frequency

4. Case

Case style: BF 141

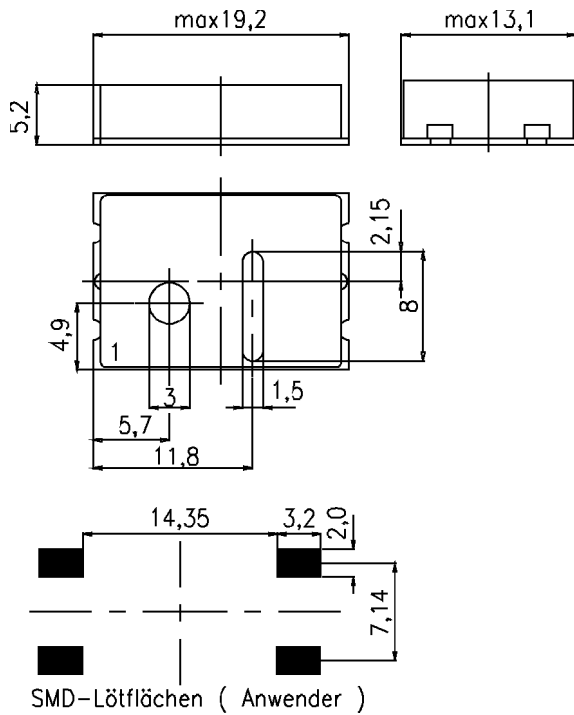

1.Pin configuration

1. Control voltage $U_C = 0.5V...4.5V$
2. Ground, Case
3. RF-Output
4. Supply voltage U_B

5. Test circuit

