

SANYO	No.4473	2SC5070
		NPN Epitaxial Planar Silicon Transistor Low-Frequency General-Purpose Amp, Driver Applications

Features

- High Current Capacity.
- Adoption of MBIT process.
- High DC current gain.
- Low collector-to-emitter saturation voltage.
- High V_{EBO} .


Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

			unit
Collector-to-Base Voltage	V_{CBO}	30	V
Collector-to-Emitter Voltage	V_{CEO}	25	V
Emitter-to-Base Voltage	V_{EBO}	15	V
Collector Current	I_C	2	A
Collector Current (Pulse)	I_{CP}	4	A
Base Current	I_B	0.4	A
Collector Dissipation	P_C	1.5	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^\circ\text{C}$


Electrical Characteristics at $T_a = 25^\circ\text{C}$









		min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 20\text{V}, I_E = 0$		100	nA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 10\text{V}, I_C = 0$		100	nA
DC Current Gain	$h_{FE(1)}$	$V_{CE} = 5\text{V}, I_C = 500\text{mA}$	800	1500	3200
	$h_{FE(2)}$	$V_{CE} = 5\text{V}, I_C = 1\text{A}$	600		
Gain-Bandwidth Product	f_T	$V_{CE} = 10\text{V}, I_C = 50\text{mA}$	260		MHz
Output Capacitance	C_{ob}	$V_{CB} = 10\text{V}, f = 1\text{MHz}$	27		pF
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = 1\text{A}, I_B = 20\text{mA}$	0.15	0.5	V
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = 1\text{A}, I_B = 20\text{mA}$	0.85	1.2	V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 10\mu\text{A}, I_E = 0$	30		V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1\text{mA}, R_{BE} = \infty$	25		V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 10\mu\text{A}, I_C = 0$	15		V
Turn-ON Time	t_{on}	See specified Test Circuit	0.14		μs
Storage Time	t_{stg}	"	1.35		μs
Fall Time	t_f	"	0.1		μs



Switching Time Test Circuit

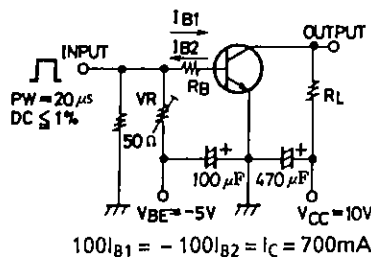

Package Dimensions 2084A
(unit : mm)

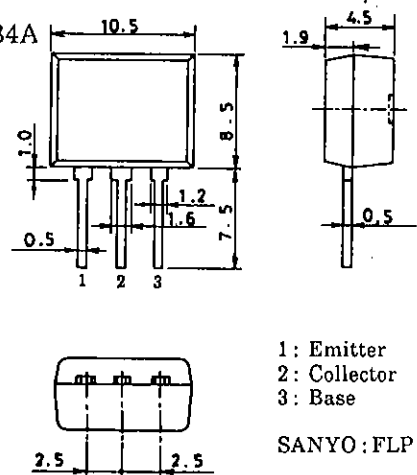

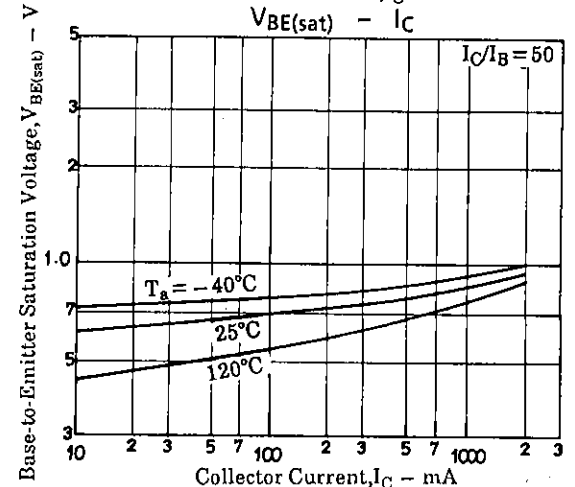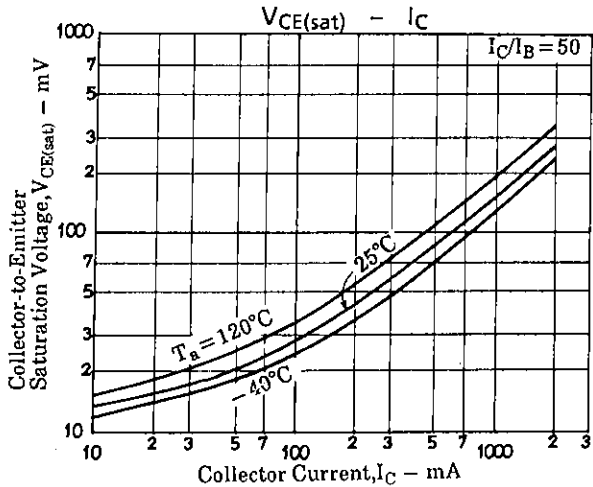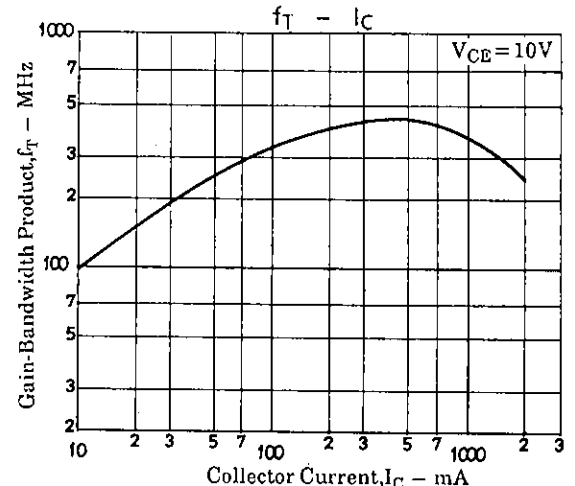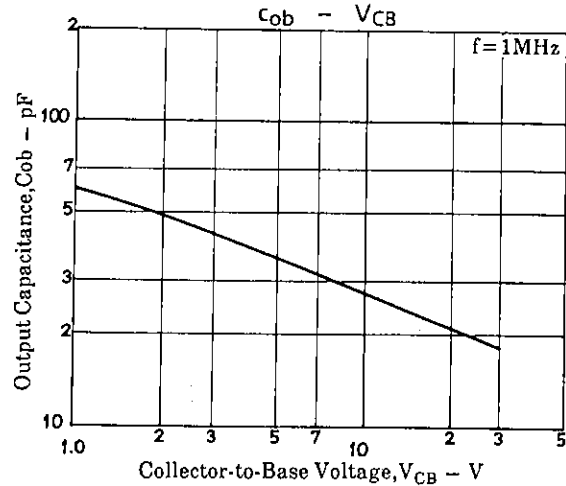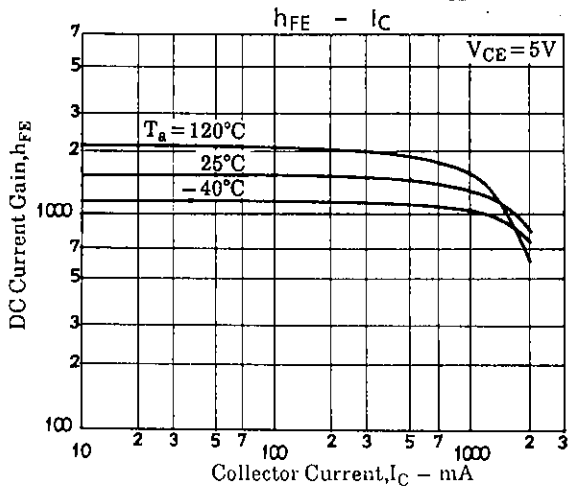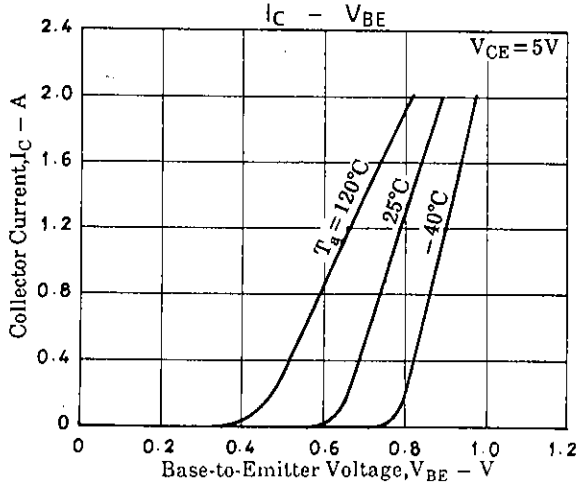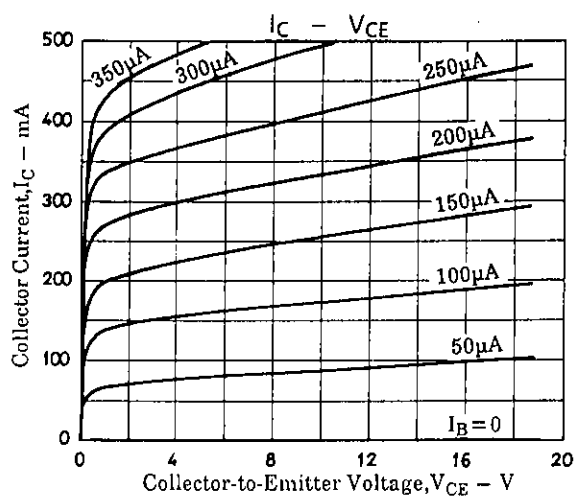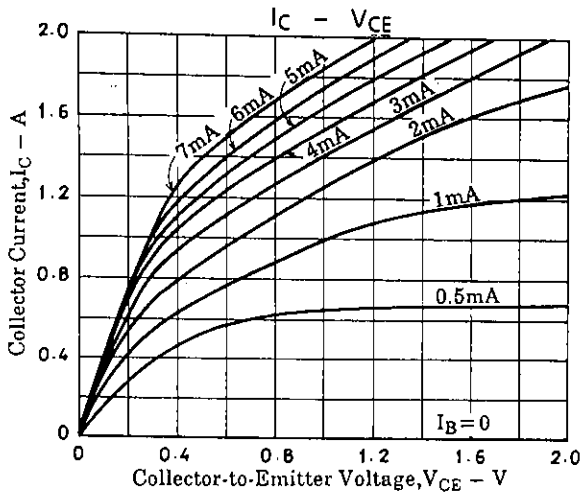

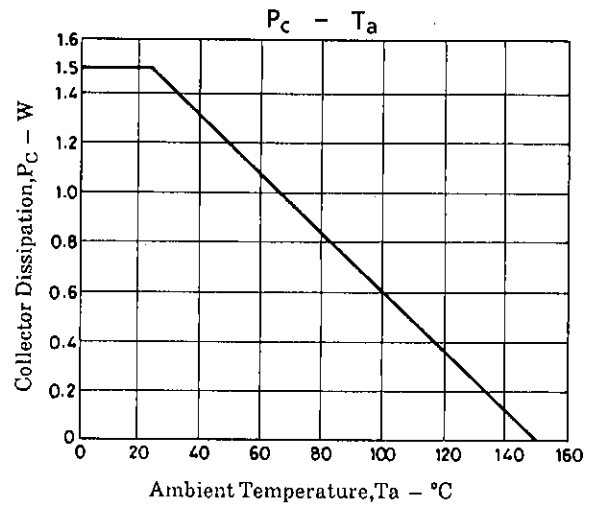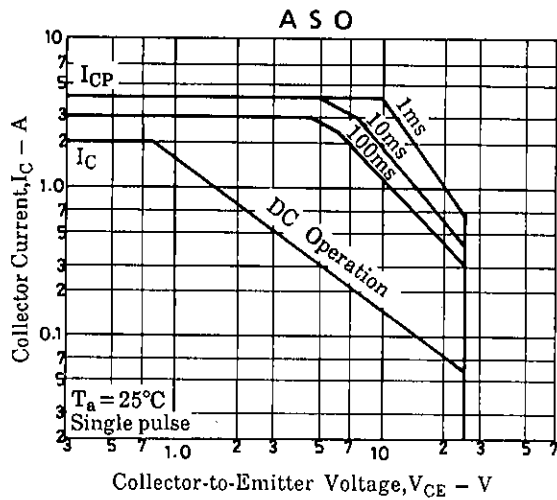

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnity and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.