

54AC/74AC14 Hex Inverter with Schmitt Trigger Input

General Description


The 'AC14 contains six inverter gates each with a Schmitt trigger input. The 'AC14 contains six logic inverters which accept standard CMOS input signals and provide standard CMOS output levels. They are capable of transforming slowly changing input signals into sharply defined, jitter-free output signals. In addition, they have a greater noise margin than conventional inverters.

The 'AC14 has hysteresis between the positive-going and negative-going input thresholds (typically 1.0V) which is determined internally by transistor ratios and is essentially insensitive to temperature and supply voltage variations.


Features

- I_{CC} reduced by 50%
- Outputs source/sink 24 mA
- Standard Military Drawing (SMD)
— 'AC14: 5962-87624


Logic Symbol

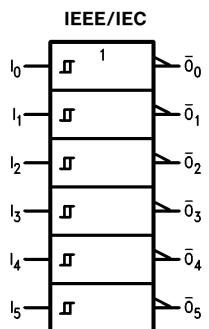

TL/F/9917-1

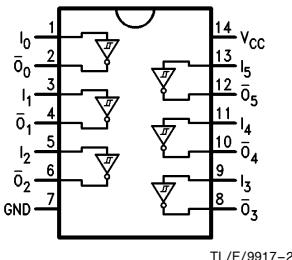Pin Assignment
for DIP, Flatpak and SOIC

TL/F/9917-2

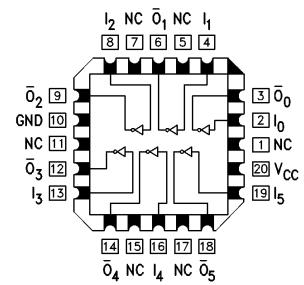Pin Assignment
for LCC

TL/F/9917-3

Pin Names	Description
I_n \bar{O}_n	Inputs Outputs

Function Table

Input	Output
A	\bar{O}
L	H
H	L

FACT™ is a trademark of National Semiconductor Corporation.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (V_{CC})	$-0.5V$ to $+7.0V$
DC Input Diode Current (I_{IIK})	
$V_I = -0.5V$	-20 mA
$V_I = V_{CC} + 0.5V$	$+20\text{ mA}$
DC Input Voltage (V_I)	$-0.5V$ to $V_{CC} + 0.5V$
DC Output Diode Current (I_{OK})	
$V_O = -0.5V$	-20 mA
$V_O = V_{CC} + 0.5V$	$+20\text{ mA}$
DC Output Voltage (V_O)	$-0.5V$ to $V_{CC} + 0.5V$
DC Output Source or Sink Current (I_O)	$\pm 50\text{ mA}$
DC V_{CC} or Ground Current per Output Pin (I_{CC} or I_{GND})	$\pm 50\text{ mA}$
Storage Temperature (T_{STG})	-65°C to $+150^{\circ}\text{C}$
Junction Temperature (T_J)	
CDIP	175°C
PDIP	140°C

Note 1: Absolute maximum ratings are those values beyond which damage to the device may occur. The databook specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. National does not recommend operation of FACT™ circuits outside databook specifications.

Recommended Operating Conditions

Supply Voltage (V_{CC})	$2.0V$ to $6.0V$
'AC	$0V$ to V_{CC}
Input Voltage (V_I)	$0V$ to V_{CC}
Output Voltage (V_O)	$0V$ to V_{CC}

Operating Temperature (T_A)	-40°C to $+85^{\circ}\text{C}$
74AC	-55°C to $+125^{\circ}\text{C}$
54AC	-40°C to $+85^{\circ}\text{C}$

DC Characteristics for 'AC Family Devices

Symbol	Parameter	V_{CC} (V)	74AC		54AC	74AC	Units	Conditions
			$T_A = +25^{\circ}\text{C}$		$T_A =$ -55°C to $+125^{\circ}\text{C}$	$T_A =$ -40°C to $+85^{\circ}\text{C}$		
			Typ	Guaranteed Limits				
V_{OH}	Minimum High Level Output Voltage	3.0	2.99	2.9	2.9	2.9	V	$I_{OUT} = -50\text{ }\mu\text{A}$
		4.5	4.49	4.4	4.4	4.4		$*V_{IN} = V_{IL}$ or V_{IH} -12 mA
		5.5	5.49	5.4	5.4	5.4		$I_{OH} = -24\text{ mA}$ -24 mA
		3.0		2.56	2.4	2.46	V	$*V_{IN} = V_{IL}$ or V_{IH} 12 mA
		4.5		3.86	3.7	3.76		$I_{OL} = 24\text{ mA}$ 24 mA
		5.5		4.86	4.7	4.76		
V_{OL}	Maximum Low Level Output Voltage	3.0	0.002	0.1	0.1	0.1	V	$I_{OUT} = 50\text{ }\mu\text{A}$
		4.5	0.001	0.1	0.1	0.1		$*V_{IN} = V_{IL}$ or V_{IH} 12 mA
		5.5	0.001	0.1	0.1	0.1		$I_{OL} = 24\text{ mA}$ 24 mA
		3.0		0.36	0.5	0.44	V	$*V_{IN} = V_{IL}$ or V_{IH} 12 mA
		4.5		0.36	0.5	0.44		$I_{OL} = 24\text{ mA}$ 24 mA
		5.5		0.36	0.5	0.44		
I_{IN}	Maximum Input Leakage Current	5.5		± 0.1	± 1.0	± 1.0	μA	$V_I = V_{CC}, \text{ GND}$
V_{t+}	Maximum Positive Threshold	3.0		2.2	2.2	2.2	V	$T_A = \text{Worst Case}$
		4.5		3.2	3.2	3.2		
		5.5		3.9	3.9	3.9		
V_{t-}	Minimum Negative Threshold	3.0		0.5	0.5	0.5	V	$T_A = \text{Worst Case}$
		4.5		0.9	0.9	0.9		
		5.5		1.1	1.1	1.1		

*All outputs loaded; thresholds on input associated with output under test.

DC Characteristics for 'AC Family Devices (Continued)

Symbol	Parameter	V _{CC} (V)	74AC	54AC	74AC	Units	Conditions	
			T _A = +25°C	T _A = -55°C to +125°C	T _A = -40°C to +85°C			
			Typ	Guaranteed Limits				
V _{h(max)}	Maximum Hysteresis	3.0		1.2	1.2	1.2	TA = Worst Case	
		4.5		1.4	1.4	1.4		
		5.5		1.6	1.6	1.6		
V _{h(min)}	Minimum Hysteresis	3.0		0.3	0.3	0.3	TA = Worst Case	
		4.5		0.4	0.4	0.4		
		5.5		0.5	0.5	0.5		
I _{OLD}	†Minimum Dynamic Output Current	5.5		50	75	mA	V _{OLD} = 1.65V Max	
I _{OHD}		5.5		-50	-75	mA	V _{OHD} = 3.85V Min	
I _{CC}	Maximum Quiescent Supply Current	5.5		2.0	40.0	20.0	µA	V _{IN} = V _{CC} or GND

†Maximum test duration 2.0 ms, one output loaded at a time.

Note: I_{IN} and I_{CC} @ 3.0V are guaranteed to be less than or equal to the respective limit @ 5.5V V_{CC}.

I_{CC} for 54AC @ 25°C is identical to 74AC @ 25°C.

AC Electrical Characteristics

Symbol	Parameter	V _{CC} * (V)	74AC			54AC		74AC		Units	
			T _A = +25°C C _L = 50 pF			T _A = -55°C to +125°C C _L = 50 pF		T _A = -40°C to +85°C C _L = 50 pF			
			Min	Typ	Max	Min	Max	Min	Max		
t _{PLH}	Propagation Delay	3.3	1.5	9.5	13.5	1.0	16.0	1.5	15.0	ns	
		5.0	1.5	7.0	10.0	1.0	12.0	1.5	11.0		
t _{PHL}	Propagation Delay	3.3	1.5	7.5	11.5	1.0	14.0	1.5	13.0	ns	
		5.0	1.5	6.0	8.5	1.5	10.0	1.5	9.5		

*Voltage Range 3.3 is 3.3V ±0.3V
Voltage Range 5.0 is 5.0V ±0.5V

Capacitance


Symbol	Parameter	Typ	Units	Conditions
C _{IN}	Input Capacitance	4.5	pF	V _{CC} = OPEN
C _{PD}	Power Dissipation Capacitance	25.0	pF	V _{CC} = 5.0V

Ordering Information

The device number is used to form part of a simplified purchasing code where the package type and temperature range are defined as follows:

Temperature Range Family	74AC	14	P	C	QR	Special Variations
74AC = Commercial						X = Devices shipped in 13" reels
54AC = Military						QR = Commercial grade device with burn-in
Device Type						QB = Military grade device with environmental and burn-in processing shipped in tubes
Package Code						Temperature Range
P = Plastic DIP						C = Commercial (-40°C to +85°C)
D = Ceramic DIP						M = Military (-55°C to +125°C)
F = Flatpak						
L = Leadless Ceramic Chip Carrier (LCC)						
S = Small Outline (SOIC)						



Physical Dimensions inches (millimeters)

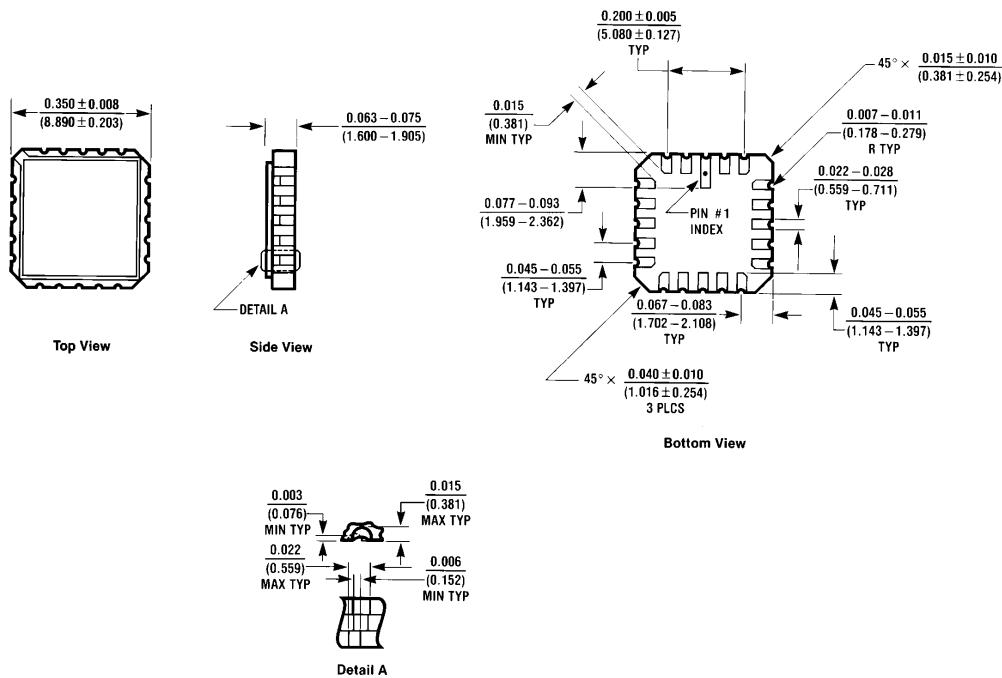



20 Terminal Ceramic Leadless Chip Carrier (L)
NS Package Number E20A

E20A (REV D)

Physical Dimensions inches (millimeters) (Continued)

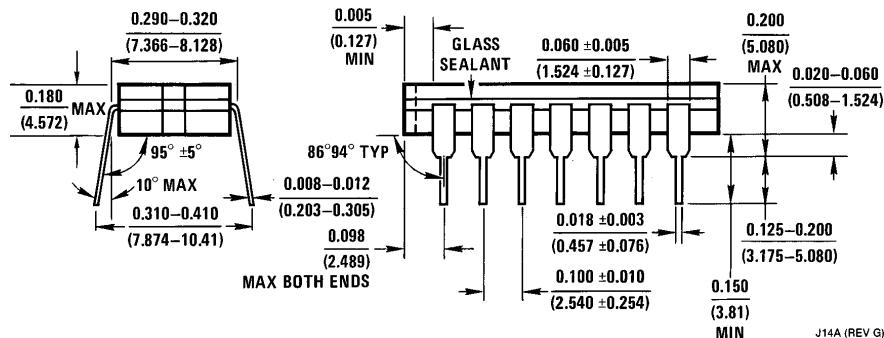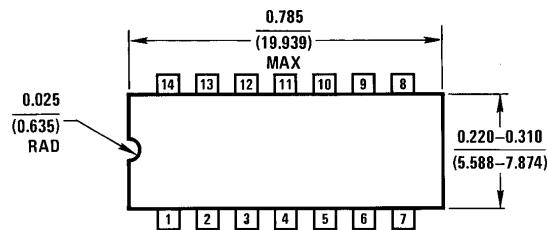


14-Lead Ceramic Dual-In-Line Package (D)
NS Package Number J14A

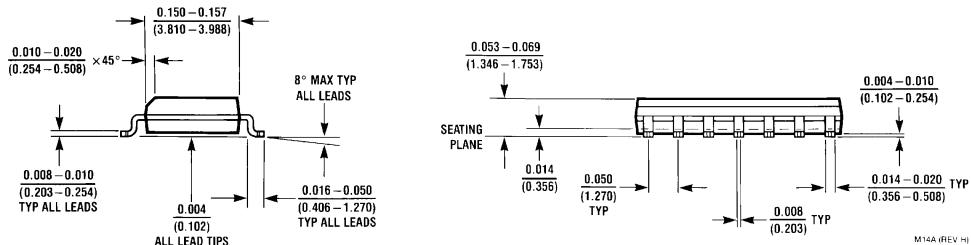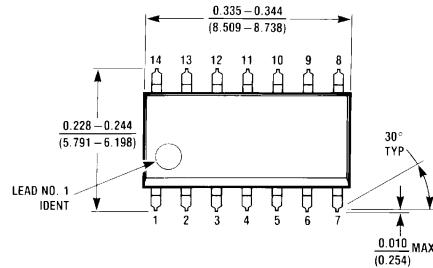


14-Lead Small Outline Integrated Circuit (S)
NS Package Number M14A

54AC/74AC14 Hex Inverter with Schmitt Trigger Input

Physical Dimensions inches (millimeters) (Continued)

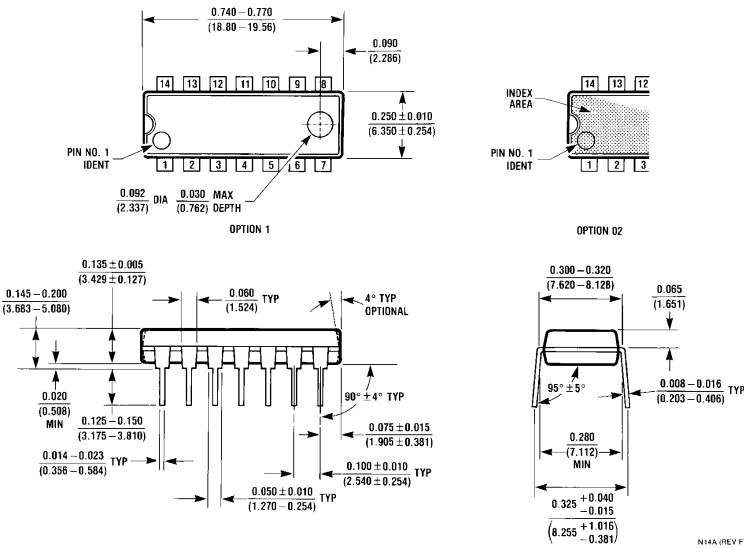

**14-Lead Plastic Dual-In-Line Package (P)
NS Package Number N14A**

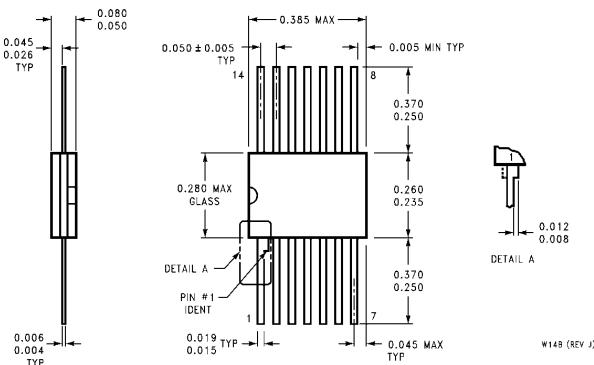

**14-Lead Ceramic Flatpak (F)
NS Package Number W14B**

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
2900 Semiconductor Drive
P.O. Box 58090
Santa Clara, CA 95052-8090
Tel: (1800) 272-9959
TWX: (910) 339-9240

National Semiconductor GmbH
Lirvy-Gargan-Str. 10
D-82256 Fürstenfeldbruck
Germany
Tel: (81-41) 35-0
Telex: 527649
Fax: (81-41) 35-1

National Semiconductor Japan Ltd.
Sumitomo Chemical
Engineering Center
Bldg. 7F
1-7-1, Nakase, Mihamachi
Chiba-City,
Chiba Prefecture 261
Tel: (043) 299-2300
Fax: (043) 299-2500

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductores Do Brazil Ltda.
Rue Deputado Lacorda Franco
120-3A
Sao Paulo-SP
Brazil 05418-000
Tel: (55-11) 212-5066
Telex: 391-1131931 NSBR BR
Fax: (55-11) 212-1181

National Semiconductor (Australia) Pty, Ltd.
Building 16
Business Park Drive
Monash Business Park
Nottinghill, Melbourne
Victoria 3168 Australia
Tel: (3) 558-9999
Fax: (3) 558-9998

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.