

SF61G - SF68G

6.0 AMPS. Glass Passivated Super Fast Rectifiers


DO-201AD

Features

- High efficiency, low VF
- High current capability
- High reliability
- High surge current capability
- Low power loss.
- For use in low voltage, high frequency inverter, free wheeling, and polarity protection application
- Green compound with suffix "G" on packing code & prefix "G" on datecode.

Mechanical Data

- Case: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Pure tin plated, lead free., solderable per MIL-STD-202, Method 208 guaranteed
- Polarity: Color band denotes cathode
- High temperature soldering guaranteed: 260°C/10 seconds/.375" (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- Mounting position: Any
- Weight: 1.2 grams

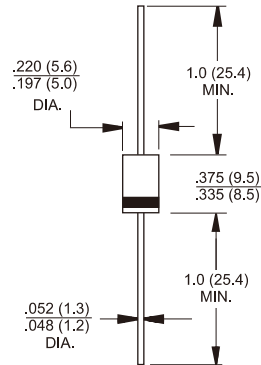

Dimensions in inches and (millimeters)

Marking Diagram



SF6XG = Specific Device Code
G = Green Compound
Y = Year
WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number	Symbol	SF 61G	SF 62G	SF 63G	SF 64G	SF 65G	SF 66G	SF 67G	SF 68G	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	500	600	V
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	350	420	V
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	500	600	V
Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @T _A = 55 °C	I _F (AV)	6.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	150								A
Maximum Instantaneous Forward Voltage @ 6.0A	V _F	0.975				1.3		1.7		V
Maximum DC Reverse Current at @ T _A =25 °C Rated DC Blocking Voltage (Note 1) @ T _A =125 °C	I _R	5.0 100								uA uA
Maximum Reverse Recovery Time (Note 2)	T _{rr}	35								nS
Typical Junction Capacitance (Note 3)	C _j	100				50				pF
Typical Thermal Resistance (Note 4)	R _{θJA} R _{θJL}	40 5.0								°C/W
Operating Temperature Range	T _J	-65 to +150								°C
Storage Temperature Range	T _{STG}	-65 to +150								°C

Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle
2. Reverse Recovery Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$
3. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.
4. Mount on Cu-Pad Size 16mm x 16mm on PCB.

RATINGS AND CHARACTERISTIC CURVES (SF61G THRU SF68G)

FIG.1- MAXIMUM AVERAGE FORWARD CURRENT DERATING

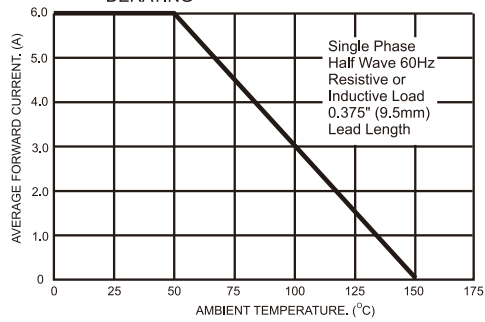


FIG.2- TYPICAL REVERSE CHARACTERISTICS

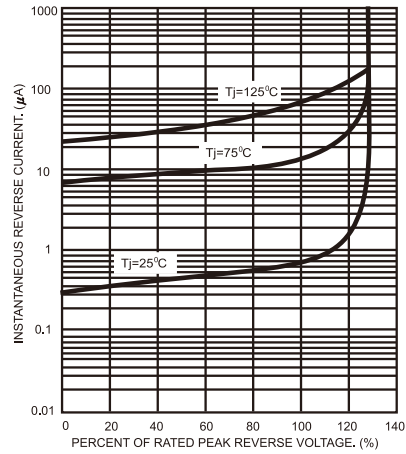


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

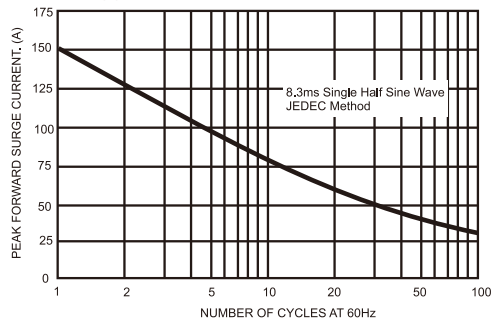


FIG.5- TYPICAL FORWARD CHARACTERISTICS

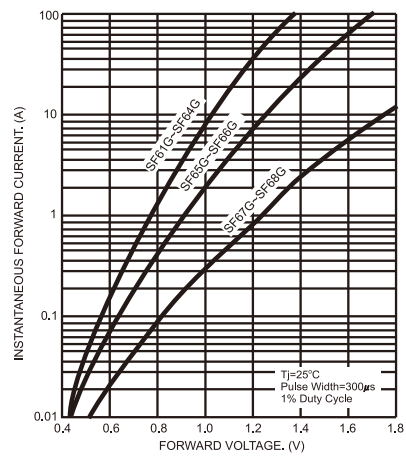


FIG.4- TYPICAL JUNCTION CAPACITANCE

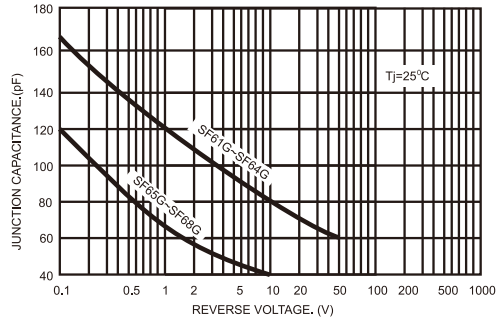


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

